



218832 (ZCOE101B2S0) Magistar Combi DS combi boiler oven with digital control, 10x1/1GN, electric, programmable, automatic cleaning, boiler in AISI304 (Australia)

## **Short Form Specification**

#### Item No.

Combi oven with high resolution full touch screen interface, multilanguage

- Built-in steam generator with real humidity control based upon Lambda Sensor - AirFlow air distribution system to achieve maximum performance with 7 fan speed levels

 - HP Automatic Cleaning: Automatic and built-in self cleaning system with integrated descale of the steam generator. 5 automatic cycles (soft, medium, strong, extra strong, rinse-only) and economizer functions to save energy, water, detergent and rinse aid

- Cooking modes: Automatic (9 food families with 100+ different pre-installed variants); Programs (a maximum of 1000 recipes can be stored and organized in 16 different categories); Manual (steam, combi and convection cycles); Specialistic Cycles (regeneration, Low Temperature Cooking, proving, EcoDelta, Sous-Vide, Static-Combi, Pasteurization of pasta, dehydration, Food Safe Control and Advanced Food Safe Control)

- Special functions: MultiTimer cooking, Cooking Optimizer to cut running costs, Make-it-Mine to customize interface, SoloMio to customize homepage, agenda Calendar, automatic backup mode to avoid downtime
- USB port to download HACCP data, programs and settings. Connectivity ready
- 6-point multi sensor core temperature probe
- Double glass door with LED lights
- Stainless steel construction throughout
- Supplied with n.1 tray rack 1/1 GN, 67 mm pitch.

#### **APPROVAL:**

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA #		

#### Main Features

- Digital interface with LED backlight buttons with guided selection.
- Built-in steam generator for highly precise humidity and temperature control according to the chosen settings.
- Real humidity control based upon Lambda Sensor to automatically recognize quantity and size of food for consistent quality results.
- Dry, hot convection cycle (25 °C 300 °C): ideal for low humidity cooking.
- Combination cycle (25 °C 300 °C): combining convected heat and steam to obtain humidity controlled cooking environment, accelerating the cooking process and reducing weight loss.
- Low temperature Steam cycle (25 °C 99 °C): ideal for sous-vide, re-thermalization and delicate cooking. Steam cycle (100 °C): seafood and vegetables. High temperature steam (25 °C - 130 °C).
- EcoDelta cooking: cooking with food probe maintaining preset temperature difference between the core of the food and the cooking chamber.
- Pre-set program for Regeneration, ideal for banqueting on plate or rethermalizing on tray.
- Programs mode: a maximum of 100 recipes can be stored in the oven's memory, to recreate the exact same recipe at any time. 4-step cooking programs also available.
- AirFlow air distribution system to achieve maximum performance in chilling/heating evenness and temperature control thanks to a special design of the chamber combined with high precision variable speed fan.
- Fan with 5 speed levels from 300 to 1500 RPM and reverse rotation for optimal evenness. Fan stops in less than 5 seconds when door is opened.
- Single sensor core temperature probe included.
- Automatic fast cool down and pre-heat function.
- HP Automatic Cleaning: Automatic and built-in self cleaning system with integrated descale of the steam generator. 5 automatic cycles (soft, medium, strong, extra strong, rinse-only).
- Grease Collector: predisposed for integrated grease drain and collection for safer operation (dedicated base as optional accessory).
- Back-up mode with self-diagnosis is automatically activated if a failure occurs to avoid downtime.
- 2 different chemical options available: solid and liquid (requires optional accessory).
- Capacity: 10 GN 1/1 trays.
- [NOT TRANSLATED]

#### Construction

- Double thermo-glazed door with open frame construction, for cool outside door panel. Swing hinged easy-release inner glass on door for easy cleaning.
- Seamless hygienic internal chamber with all rounded corners for easy cleaning.
- 304 AISI stainless steel construction throughout.
- Front access to control board for easy service.

Part of

Electrolux Professional Group



• IPX 5 spray water protection certification for easy cleaning.

#### • Supplied with n.1 tray rack 1/1 GN, 67 mm pitch.

#### **User Interface & Data Management**

- USB port to download HACCP data, share cooking programs and configurations. USB port also allows to plug-in sous-vide probe (optional accessory).
- Connectivity ready for real time access to connected appliances from remote and HACCP monitoring (requires optional accessory).

#### Sustainability

· Reduced power function for customized slow cooking cycles.

## **Optional Accessories**

• Wheel kit for 6 & 10 GN 1/1 and 2/1 GN oven base (not for the disassembled one)	PNC 922003	
<ul> <li>Pair of AISI 304 stainless steel grids, GN 1/1</li> </ul>	PNC 922017	
<ul> <li>Pair of grids for whole chicken (8 per grid - 1,2kg each), GN 1/1</li> </ul>	PNC 922036	
<ul> <li>AISI 304 stainless steel grid, GN 1/1</li> </ul>	PNC 922062	
<ul> <li>Grid for whole chicken (4 per grid - 1,2kg each), GN 1/2</li> </ul>	PNC 922086	
• External side spray unit (needs to be mounted outside and includes support to be mounted on the oven)	PNC 922171	
<ul> <li>Baking tray for 5 baguettes in perforated aluminum with silicon coating, 400x600x38mm</li> </ul>	PNC 922189	
Baking tray with 4 edges in perforated aluminum, 400x600x20mm	PNC 922190	
<ul> <li>Baking tray with 4 edges in aluminum, 400x600x20mm</li> </ul>	PNC 922191	
<ul> <li>Pair of frying baskets</li> </ul>	PNC 922239	
AISI 304 stainless steel bakery/pastry grid 400x600mm	PNC 922264	
<ul> <li>Double-step door opening kit</li> </ul>	PNC 922265	
<ul> <li>Grid for whole chicken (8 per grid - 1,2kg each), GN 1/1</li> </ul>	PNC 922266	
Grease collection tray, GN 1/1, H=100 mm	PNC 922321	
<ul> <li>Kit universal skewer rack and 4 long skewers for GN 1/1 ovens</li> </ul>	PNC 922324	
<ul> <li>Universal skewer rack</li> </ul>	PNC 922326	
<ul> <li>4 long skewers</li> </ul>	PNC 922327	
<ul> <li>Multipurpose hook</li> </ul>	PNC 922348	
<ul> <li>4 flanged feet for 6 &amp; 10 GN , 2", 100-130mm</li> </ul>	PNC 922351	
• Grid for whole duck (8 per grid - 1,8kg each), GN 1/1	PNC 922362	
Thermal cover for 10 GN 1/1 oven and blast chiller freezer	PNC 922364	
<ul> <li>Tray support for 6 &amp; 10 GN 1/1 disassembled open base</li> </ul>	PNC 922382	
Wall mounted detergent tank holder	PNC 922386	
USB SINGLE POINT PROBE	PNC 922390	
<ul> <li>Tray rack with wheels 10 GN 1/1,</li> </ul>	PNC 922601	
65mm pitch (std) • Tray rack with wheels, 8 GN 1/1,	PNC 922602	
80mm pitch		

<ul> <li>Bakery/pastry tray rack with wheels 400x600mm for 10 GN 1/1 oven and blast chiller freezer, 80mm pitch (8 runners)</li> </ul>	PNC 92260	8 🗅
<ul> <li>Slide-in rack with handle for 6 &amp; 10 GN 1/1 oven</li> </ul>	PNC 92261	0 🗅
Open base with tray support for 6 & 10 GN 1/1 oven	PNC 92261	2 🗅
Cupboard base with tray support for 6 & 10 GN 1/1 oven	PNC 92261	4 🗅
<ul> <li>Hot cupboard base with tray support for 6 &amp; 10 GN 1/1 oven holding GN 1/1 or400x600mm</li> </ul>	PNC 92261	5 🗅
• External connection kit for detergent and rinse aid	PNC 92261	8 🗆
Grease collection kit for GN 1/1-2/1 cupboard base (trolley with 2 tanks, open/ close device and drain)	PNC 92261	9 🗅
• Stacking kit for electric 6+6 GN 1/1 ovens or electric 6+10 GN 1/1 GN ovens	PNC 92262	0
• Trolley for slide-in rack for 6 & 10 GN 1/1 oven and blast chiller freezer	PNC 92262	6 🗅
<ul> <li>Trolley for mobile rack for 6 GN 1/1 on 6 or 10 GN 1/1 ovens</li> </ul>	PNC 92263	0 🗅
<ul> <li>Stainless steel drain kit for 6 &amp; 10 GN oven, dia=50mm</li> </ul>	PNC 92263	6 🗆
<ul> <li>Plastic drain kit for 6 &amp;10 GN oven, dia=50mm</li> </ul>	PNC 92263	7 🗆
<ul> <li>Trolley with 2 tanks for grease collection</li> </ul>	PNC 92263	8 🗆
Grease collection kit for open base (2 tanks, open/close device and drain)	PNC 92263	9 🗅
Wall support for 10 GN 1/1 oven	PNC 92264	5 🗆
<ul> <li>Banquet rack with wheels holding 30 plates for 10 GN 1/1 oven and blast chiller freezer, 65mm pitch</li> </ul>	PNC 92264	-
<ul> <li>Banquet rack with wheels holding 23 plates for 10 GN 1/1 oven and blast chiller freezer, 85mm pitch</li> </ul>	PNC 92264	9 🗅
• Dehydration tray, GN 1/1, H=20mm	PNC 92265	1 🗆
<ul> <li>Flat dehydration tray, GN 1/1</li> </ul>	PNC 92265	
Open base for 6 & 10 GN 1/1 oven, disassembled	PNC 92265	
Bakery/pastry rack kit for 10 GN 1/1 oven with 8 racks 400x600mm and 80mm pitch	PNC 92265	
Heat shield for stacked ovens 6 GN 1/1 on 10 GN 1/1		
<ul> <li>Heat shield for 10 GN 1/1 oven</li> </ul>	PNC 92266	-
• Fixed tray rack for 10 GN 1/1 and 400x600mm grids	PNC 92268	
<ul> <li>Kit to fix oven to the wall</li> </ul>	PNC 92268	
<ul> <li>4 high adjustable feet for 6 &amp; 10 GN ovens, 100-115MM</li> </ul>	PNC 92268	
• Tray support for 6 & 10 GN 1/1 open base	PNC 92269	0 🗆
<ul> <li>Reinforced tray rack with wheels, lowest support dedicated to a grease collection tray for 10 GN 1/1 oven, 64mm pitch</li> </ul>	PNC 92269	4 🗅
Detergent tank holder for open base	PNC 92269	9 🗆
<ul> <li>Bakery/pastry runners 400x600mm for 6 &amp; 10 GN 1/1 oven base</li> </ul>		
<ul> <li>Wheels for stacked ovens</li> </ul>	PNC 92270	4 🗆
<ul> <li>Spit for lamb or suckling pig (up to 12kg) for GN 1/1 ovens</li> </ul>	PNC 92270	
Mesh grilling grid	PNC 92271	3 🗅

## Magistar Combi DS Electric Combi Oven 10GN1/1

⊕ The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing. Intertek







<ul> <li>Probe holder for liquids</li> </ul>	PNC 922714	
Odourless hood with fan for 6 & 10 GN     1/1 electric ovens	PNC 922718	
Condensation hood with fan for 6 & 10 GN 1/1 electric oven	PNC 922723	
• Exhaust hood with fan for 6 & 10 GN 1/1 ovens	PNC 922728	
• Exhaust hood without fan for 6&10	PNC 922733	
<ul><li>1/1GN ovens</li><li>Fixed tray rack, 8 GN 1/1, 85mm pitch</li></ul>	PNC 922741	
<ul> <li>Fixed tray rack, 8 GN 1/1, 85mm pitch</li> <li>Fixed tray rack, 8 GN 2/1, 85mm pitch</li> </ul>	PNC 922741 PNC 922742	
<ul> <li>4 high adjustable feet for 6 &amp; 10 GN ovens, 230-290mm</li> </ul>	PNC 922745	
<ul> <li>Tray for traditional static cooking, H=100mm</li> </ul>	PNC 922746	
• Double-face griddle, one side ribbed and one side smooth, 400x600mm	PNC 922747	
TROLLEY FOR GREASE     COLLECTION KIT	PNC 922752	
Water inlet pressure reducer	PNC 922773	
KIT FOR INSTALLATION OF	PNC 922774	
ELECTRIC POWER PEAK MANAGEMENT SYSTEM-6-10 GN OVENS		
<ul> <li>Non-stick universal pan, GN 1/1, H=20mm</li> </ul>	PNC 925000	
<ul> <li>Non-stick universal pan, GN 1/ 1, H=40mm</li> </ul>	PNC 925001	
<ul> <li>Non-stick universal pan, GN 1/1, H=60mm</li> </ul>	PNC 925002	
<ul> <li>Double-face griddle, one side ribbed and one side smooth, GN 1/1</li> </ul>	PNC 925003	
Aluminum grill, GN 1/1	PNC 925004	
<ul> <li>Frying pan for 8 eggs, pancakes, hamburgers, GN 1/1</li> </ul>	PNC 925005	
• Flat baking tray with 2 edges, GN 1/1	PNC 925006	
<ul> <li>Baking tray for 4 baguettes, GN 1/1</li> </ul>	PNC 925007	
Potato baker for 28 potatoes, GN 1/1	PNC 925008	
<ul> <li>Non-stick universal pan, GN 1/2, H=20mm</li> </ul>	PNC 925009	
<ul> <li>Non-stick universal pan, GN 1/2, H=40mm</li> </ul>	PNC 925010	
<ul> <li>Non-stick universal pan, GN 1/2, H=60mm</li> </ul>	PNC 925011	
Compatibility kit for installation on previous base GN 1/1	PNC 930217	










The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.



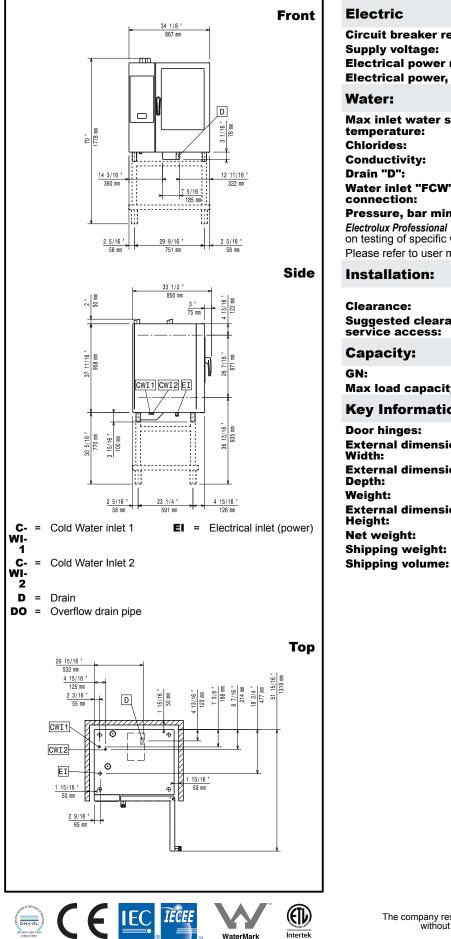

Intertek

WaterMark

Circuit breaker required Supply voltage: Electrical power max.: Electrical power, default:	400-430 V/3N ph/50-60 Hz 19.8 kW 19 kW
Water:	
Max inlet water supply temperature: Chlorides: Conductivity: Drain "D": Water inlet "FCW" connection: Pressure, bar min/max: Electrolux Professional recommend on testing of specific water conditi Please refer to user manual for de	ions.
Installation:	
Clearance: Suggested clearance for service access:	Clearance: 5 cm rear and right hand sides. 50 cm left hand side.
Capacity:	
GN: Max load capacity:	10 - 1/1 Gastronorm 50 kg
Key Information:	
Door hinges: External dimensions, Width: External dimensions, Depth: Weight:	867 mm 775 mm 148.5 kg
External dimensions, Height: Net weight: Shipping weight:	1058 mm 148.5 kg 166.5 kg

# Magistar Combi DS Electric Combi Oven 10GN1/1

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

1.06 m<sup>3</sup>