

Modular Cooking Range Line EVO700 6-Hot Plates Electric Boiling Top Range

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA #		



Main Features

- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- The six 2.6kW cast-iron plates are hermetically sealed to the one-piece top.
- The special design of the control knob system guarantees against water infiltration.
- IPX 4 water protection.
- Suitable for countertop installation.

Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

372019 (Z7ECEL6R00)

6-hot plate (2,6 kW each) electric boiling top

Short Form Specification

Item No.

To be installed on open base installations, bridging supports or cantilever systems. Six 2.6 kW cast-iron hot plates hermetically sealed to the one-piece top. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

APPROVAL:



Modular Cooking Range Line EVO700 6-Hot Plates Electric Boiling Top Range


Optional Accessories


 Support for bridge type installation, 1200 mm 	PNC 206139	
 Support for bridge type installation, 1400 mm 	PNC 206140	
 Support for bridge type installation, 1600 mm 	PNC 206141	
Frontal handrail 1200 mm	PNC 206191	
 Frontal handrail 1600 mm 	PNC 206192	
Right and left side handrails	PNC 206240	
 Water column with swivel arm (water column extension not included) 	PNC 206289	
Water column extension	PNC 206291	
 Chimney upstand, 800 mm 	PNC 206304	
• 2 side covering panels, height 250 mm, depth 700 mm	PNC 206320	
Chimney grid net, 400mm	PNC 206400	






Modular Cooking Range Line EVO700 6-Hot Plates Electric Boiling Top Range





El = Electrical inlet (power) EQ = Equipotential screw

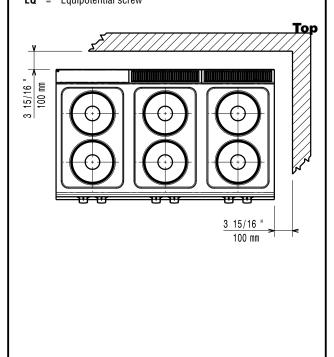

Electric

Supply voltage:

372019 (Z7ECEL6R00) 380-400 V/3 ph/50/60 Hz

Total Watts: 15.6 kW

Predisposed for:

Key Information:

Front Plates Power: 2.6 - 2.6 kW **Back Plates Power:** 2.6 - 2.6 kW Front Plates dimensions: Ø 230 Ø 230 **Back Plates dimensions:** Ø 230 Ø 230 Net weight: 60 kg Shipping weight: 55 ka Shipping height: 540 mm Shipping width: 830 mm Shipping depth: 1300 mm Shipping volume: $0.58 \ m^{3}$

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

[NOT TRANSLATED] EH761

