

## Digital Cabinets Roll-in Compact Refrigerator 750 lt - 1 door - remote

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



110882 (ZRI075R1FR)

1-door Roll-in Refrigerator  
750lt, 0+10°C, AISI 304,  
remote

### Short Form Specification

#### Item No. \_\_\_\_\_

External and internal in AISI 304 stainless steel. Insulation thickness mm60. Right hinged full door with lock. Bottom door gasket adjustable. Pre-arranged for remote refrigeration unit (non included); ventilated operating mode; digital control; evaporator; automatic defrost; external digital temperature display; high/low humidity switch. Operating temperature 0+10°C. For ambient temperatures up to 43 °C.

### Main Features

- Automatic defrost and automatic evaporation of defrost water.
- Ventilated cooling for optimal temperature distribution.
- One full door.
- Connectivity ready for real time access to connected appliances from remote and data monitoring (requires optional accessory).
- Excellent space optimisation thanks to the compact dimensions (footprint 0.56m²).
- Lift-up control panel to better access main components.
- Digital control panel with temperature display.
- Large digital white-digit display with humidity selection button (3 preset level), internal temperature display and setting, manual activation of defrost cycle and turbo frost cycle (to rapidly cool warm loads).
- The operating temperature can be adjusted from 0 to +10 °C to suit both meat and dairy storage requirements.
- Suitable for all kinds of 18 shelves GN 1/1 trolleys, designed to fit the 18 shelves GN 2/1 trolley available as optional accessory.
- Complies with main international certification bodies and is CE marked.
- Inner side protectors to protect the internal walls.
- Adjustable bottom door gasket.
- Simple cooling unit easily accessible from the rear of the appliance.
- Tropicalized unit.

APPROVAL: \_\_\_\_\_

## Construction

- Interior cell and external panel are constructed in 304 AISI stainless steel.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Evaporator and fan are placed outside the cell to provide the maximum storage capacity.
- Lockable door.
- Evaporator cover is easily removable for service.
- Remote compressor to suit operating conditions.
- External panels are in AISI 304 stainless steel for higher level of hygiene.
- Electrical connection: 220-240V-single phase 50HZ or 220-240V-single phase 60HZ.

## Sustainability


- Finished in top quality materials to ensure durability.
- CFC and HCFC-free insulation.
- Cabinet fitted with up to 60 mm thickness of Cyclopentane insulation for best insulating performance (thermal conductivity: 0,020 W/m\*K). CFC and HCFC-free insulation.

## Optional Accessories


- Remote unit for refrigerators and refrigerated counters, -2+10°C, R134a PNC 880231 ☐
- Trolley 18 GN 2/1 for 750lt Roll-in PNC 881521 ☐

## Digital Cabinets Roll-in Compact Refrigerator 750 lt - 1 door - remote

**Front**

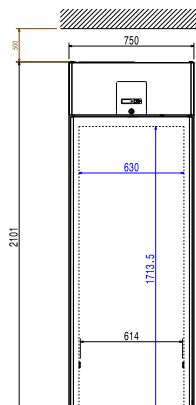


**Side**

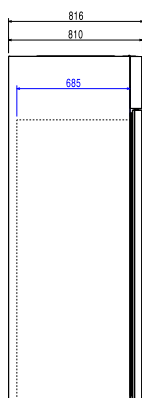

**EI** = Electrical inlet (power)  
**RI** = Refrigerant Inlet  
**RO** = Refrigerant Outlet

**Top**



### Electric

Supply voltage: 220-240 V/1 ph/50/60 Hz

### Key Information:

#### Door hinges:

**External dimensions, Width:** 750 mm  
**External dimensions, Depth:** 816 mm  
**External dimensions, Height:** 2101 mm  
**Number and type of doors:** 1 Full  
**External side panels:** 304 AISI  
**External top panels:** Galvanized Steel  
**External door material:** 304 AISI  
**Internal panels material:** 304 AISI

### Refrigeration Data

**Control type:** Digital  
**Operating temperature max.:** 10 °C  
**Refrigeration type:** R134a;R513A;R426A  
**Suggested refrigeration power:** 580 W  
**Condition at evaporation temperature:** -10 °C  
**Condition at condensation temperature:** 55 °C  
**Condition at ambient temperature:** 43 °C  
**Connection pipes (remote) - outlet:** 9.8 mm  
**Connection pipes (remote) - inlet:** 6 mm