

Digital Cabinets Roll-in Refrigerator 1600 lt - 1 door - remote

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____

**110885 (ZRI16R1FR)**1-door Roll-in Refrigerator
1600lt, 0/+10°C, AISI 304,
remote

Short Form Specification

Item No. _____

External and internal in AISI 304 stainless steel. Insulation thickness mm75. Reversible right hinged full door with lock, 60mm thick insulation. Bottom door gasket adjustable. Universal shock protectors on all sides. Remote refrigeration unit (not included); ventilated operating mode. Digital control panel; temperature display; humidity control; hidden evaporator; automatic defrost and automatic evaporation of defrost water. Evaporator probe optimizes defrost cycle. Operating temperature 0/+10°C at 43°C ambient temperature. CFC and HCFC free insulation. Compatible with trolleys (mm820x1015x1840h).

Main Features

- The operating temperature can be adjusted from 0 to +10 °C to suit both meat and dairy storage requirements.
- One full door.
- Automatic defrost and automatic evaporation of defrost water.
- Ventilated cooling for optimal temperature distribution.
- Universal shock-protectors on all sides.
- Plug-in installation: 1 phase, 220/240V supply.
- Lift-up control panel to better access main components.
- Digital control panel with temperature display.
- Large digital white-digit display with humidity selection button (3 preset level), internal temperature display and setting, manual activation of defrost cycle and turbo frost cycle (to rapidly cool warm loads).
- Complies with main international certification bodies and is CE marked.
- Adjustable bottom door gasket.
- Simple cooling unit easily accessible from the rear of the appliance.
- Tropicalized unit.

APPROVAL: _____

Construction

- Interior cell and external panel are constructed in 304 AISI stainless steel.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Evaporator and fan are placed outside the cell to provide the maximum storage capacity.
- Lockable door.
- Evaporator cover is easily removable for service.
- Remote compressor to suit operating conditions.
- External panels are in AISI 304 stainless steel for higher level of hygiene.
- The whole interior cell is constructed of AISI 304 stainless steel with rounded corners for a better cleanability.

- Banquet trolley with rack holding 116 plates for 20 GN 2/1 oven and blast chiller freezer, 66mm pitch PNC 922764 ☐

User Interface & Data Management

- Connectivity ready for real time access to connected appliances from remote and data monitoring (requires optional accessory).

Sustainability

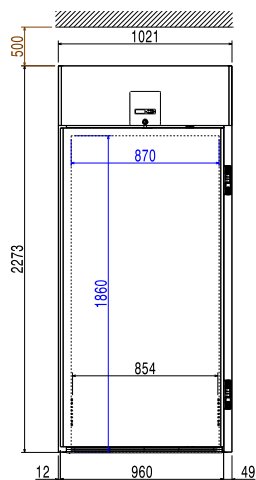
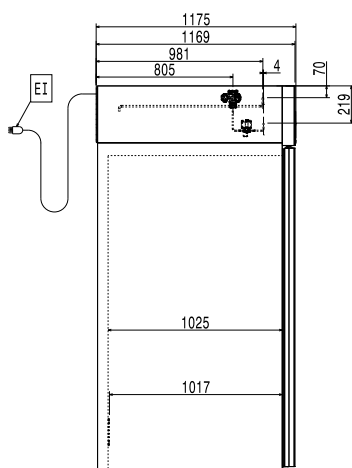
- 75 mm thick insulation, with cyclopentane injection for long-term insulation and energy saving.
- Finished in top quality materials to ensure durability.
- CFC and HCFC-free insulation.

Optional Accessories

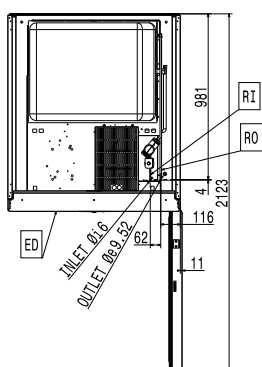
- Remote unit -2+10°C for 1430lt refrigerated cabinets PNC 880232 ☐
- Trolley with tray rack, 15 GN 1/1, 84mm pitch PNC 922683 ☐
- Trolley with tray rack, 15 GN 2/1, 84mm pitch PNC 922686 ☐
- Trolley with tray rack, 20 GN 1/1, 63mm pitch PNC 922753 ☐
- Trolley with tray rack, 16 GN 1/1, 80mm pitch PNC 922754 ☐
- Banquet trolley with rack holding 54 plates for 20 GN 1/1 oven and blast chiller freezer, 74mm pitch PNC 922756 ☐
- Trolley with tray rack 20 GN 2/1, 63mm pitch PNC 922757 ☐
- Trolley with tray rack, 16 GN 2/1, 80mm pitch PNC 922758 ☐
- Banquet trolley with rack holding 92 plates for 20 GN 2/1 oven and blast chiller freezer, 85mm pitch PNC 922760 ☐
- Bakery/pastry trolley with rack holding 600x400mm grids for 20 GN 1/1 oven and blast chiller freezer, 80mm pitch (16 runners) PNC 922761 ☐
- Bakery/pastry trolley with rack holding 400x600mm grids for 20 GN 2/1 oven and blast chiller freezer, 80mm pitch (16 runners) PNC 922762 ☐
- Banquet trolley with rack holding 45 plates for 20 GN 1/1 oven and blast chiller freezer, 90mm pitch PNC 922763 ☐

Digital Cabinets

Roll-in Refrigerator 1600 lt - 1 door - remote

Front

Side


EI = Electrical inlet (power)
 RI = Refrigerant Inlet
 RO = Refrigerant Outlet

Top


Electric

Supply voltage: 220-240 V/1 ph/50/60 Hz

Key Information:

Door hinges: 1 Full
 External dimensions, Width: 1021 mm
 External dimensions, Depth: 1175 mm
 External dimensions, Height: 2273 mm
 Number and type of doors: 1 Full
 External side panels: 304 AISI
 External top panels: 304 AISI
 External door material: 304 AISI
 Internal panels material: 304 AISI

Refrigeration Data

Control type: Digital
 Operating temperature max.: 10 °C
 Refrigeration type: R134a;R513A;R426A
 Suggested refrigeration power: 1380 W
 Condition at evaporation temperature: -10 °C
 Condition at condensation temperature: 55 °C
 Condition at ambient temperature: 32 °C
 Connection pipes (remote) - outlet: 9.5 mm
 Connection pipes (remote) - inlet: 6 mm