

## NAU Maxi HPe 1 Door Digital Freezer, 670lt (-22/-15) - R290 - Class B

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



111318 (ZR471FFC)

1-door freezer 670lt, -22/-15°C,  
digital, stainless steel, R290,  
Class B

### Short Form Specification

#### Item No.

Full door freezer with internal and external structure in 430 AISI stainless steel; external back panel in galvanized steel and bottom panel in anti-corrosive material. Digital control with cabinet temperature display and setting and possibility to activate manually the defrost cycle, turbocooling. Fully compliant HACCP digital controls include visible alarms. Optimized back to front forced air flow provides even temperature distribution and fast cooling in any conditions. Fitted with 90 mm-thick cyclopentane insulating foam. On-site reversible door features lock and door microswitch to switch off the fan when the door is opened. Hidden evaporator to guarantee higher storage capacity and less corrosion problems. Built-in refrigeration unit; ventilated operation; automatic defrost and evaporation of defrost water. Operating temperature: -22/-15 °C. CFC and HCFC free. R290 gas in refrigeration circuit. Certified as Class B (in accordance with EU Regulation 2015/1094. Integrated RS485 port to facilitate connection to a remote computer and integrated HACCP systems.

### Main Features

- Large storage area suitable to contain 2/1 GN grids or shelves on anti-tilt runners.
- Equipped with single phase electrical cable and Schuko plug for easy and fast installation.
- Right hinged full door.
- Hidden evaporator thus guaranteeing higher storage capacity and less corrosion problems.
- Integrated RS485 port to facilitate connection to a remote computer and integrated HACCP systems.
- Internal structure with numerous charging positions available to host grids, ensuring higher net capacity and a greater storage space.
- 60 mm-thick insulation covering the evaporator can be easily removed with a single operation.
- Connectivity ready for real time access to connected appliances from remote and data monitoring (requires optional accessory).
- Rilsan coated grids for improved protection.
- Optimized back to front forced air flow provide even temperature distribution and fast cooling in any conditions.
- Automatic defrost.
- Easy serviceability thanks to the intuitive control panel with access via app.
- Large digital white-digit display with cabinet temperature display and setting, activation of turbo frost cycle (to rapidly cool warm loads) and possibility to activate manually the defrost cycle.
- Freezer model has operating temperatures that can be adjusted from -22 to -15 °C.
- Tropicalized unit.

### Construction

- Easy access to the main components for maintenance.
- Stainless steel runners and supports easily disassembled.
- Anti-corrosion bottom avoids any damage that may be caused to the cabinet by aggressive detergents employed to clean the floors.
- Doors are self-closing and can be fully opened up to 180°.
- Lockable door.
- The rounded internal corners, the easily removable runners and grids allow for ease of cleaning and high hygiene standards.
- AISI 430 stainless steel internal structure and external panels.
- Mounted on adjustable Stainless steel feet, with castors as an option.

### Sustainability

- Automatic evaporation of the defrosting water by hot gas on the top for energy saving.
- Door switch stops the fan when door is opened to avoid cold air exiting the cell, thus saving energy.
- Removable triple-chamber balloon magnetic gasket to improve insulation and reduce energy consumption and ease of cleaning.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact

APPROVAL: \_\_\_\_\_

(GWP=3), to reduce green house and ozone depletion effects.

- Fitted with 90 mm thickness of cyclopentane insulation for best insulating performance (thermal conductivity: 0,020 W/m\*K) and lowest environmental impact (GWP=3).

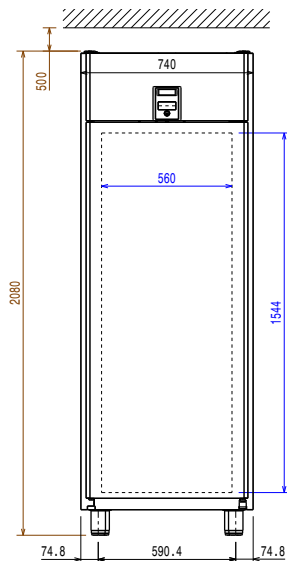
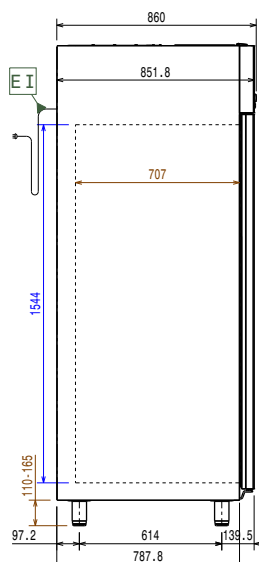
### Included Accessories

- 3 of 2/1GN grey rilsan grid with 2 runners PNC 881020

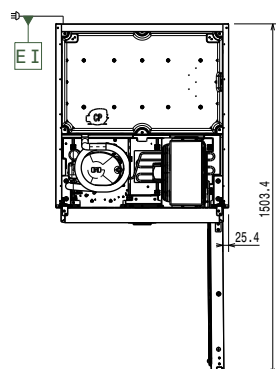
### Optional Accessories

- |   |            |                          |
|---|------------|--------------------------|
| • 2 stainless steel runners for refrigerated cabinets (Marine)                              | PNC 880242 | <input type="checkbox"/> |
| • Set of 8 GN1/1 PVC containers for fish  | PNC 880243 | <input type="checkbox"/> |
| • Pedal opening for cabinets  | PNC 880324 | <input type="checkbox"/> |
| • Ethernet connectivity kit IJF for Refrigeration   | PNC 880685 | <input type="checkbox"/> |
| • 1/1GN plastic container with false bottom   | PNC 880705 | <input type="checkbox"/> |
| • 4 swivelling wheels (2 with brake), diam 125 mm, for refrigerators, NOT for remote models | PNC 881002 | <input type="checkbox"/> |
| • Kit to fit 10 pastry trays (400x600mm)  | PNC 881003 | <input type="checkbox"/> |
| • 2/1GN grey rilsan grid  | PNC 881004 | <input type="checkbox"/> |
| • 2/1GN aisi 304 stainless steel grid   | PNC 881016 | <input type="checkbox"/> |
| • 2/1GN 304 AISI stainless steel grid with 2 runners  | PNC 881018 | <input type="checkbox"/> |
| • 2/1GN grey rilsan grid with 2 runners   | PNC 881020 | <input type="checkbox"/> |
| • Set of 2 stainless steel runners for 670/1430lt refrigerators and freezers                | PNC 881021 | <input type="checkbox"/> |
| • 2/1GN pvc container with lid and 2 runners  | PNC 881039 | <input type="checkbox"/> |
| • 2/1GN perforated shelf  | PNC 881042 | <input type="checkbox"/> |
| • 1/1GN rilsan steel wire basket h=150mm  | PNC 881043 | <input type="checkbox"/> |
| • 2/1GN grey rilsan basket+2 runners h=150mm  | PNC 881047 | <input type="checkbox"/> |
| • IoT module for refrigerated cabinets and counters   | PNC 881298 | <input type="checkbox"/> |
| • POE switch  | PNC 922432 | <input type="checkbox"/> |

# NAU Maxi HPe 1 Door Digital Freezer, 670lt (-22/-15) - R290 - Class B

**Front**

**Side**


EI = Electrical inlet (power)

**Top**


## Electric

Supply voltage:	220-240 V/1 ph/50 Hz
Electrical power, max:	0.3 kW

## Capacity:

Number and type of grids (included):	3 - GN 2/1
--------------------------------------	------------

## Key Information:

Net Volume:	503 lt
Door hinges:	
External dimensions, Width:	740 mm
External dimensions, Depth:	885 mm
External dimensions, Depth with Doors Open:	1480 mm
External dimensions, Height:	2080 mm
Number and type of doors:	1 Full
Type of external material:	Stainless Steel
Type of internal material:	Stainless Steel
Internal panels material:	Stainless Steel
Number of positions & pitch:	44; 30 mm
Gross capacity:	670 lt
Type of model (EU Regulation. 2015/1094):	vertical frozen

## Refrigeration Data

Control type:	Digital
Refrigeration power at evaporation temperature:	-23.3 °C
Operating temperature min.:	-15 °C
Operating temperature max.:	-22 °C
Compressor power:	3/4 hp
Operating mode:	Ventilated

## Sustainability

Refrigerant type:	R290
GWP Index:	3
Refrigeration power:	707 W
Refrigerant weight:	90 g
Energy Class (EU Reg. 2015/1094):	B
Yearly and daily energy consumption (EU Reg. 2015/1094):	1380kWh/year - 4kWh/24h
Climate class (EU Reg. 2015/1094):	Heavy Duty (5)
Energy Efficiency Index-EEI (EU Reg. 2015/1094):	34.92

NAU Maxi HPe  
 1 Door Digital Freezer, 670lt (-22/-15) - R290 - Class B

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.07.31

## EU energy labelling from 1st July 2016

The European energy labelling scheme for professional refrigerators and freezers is based on requirements setting Minimum Energy Performance standards for commercial refrigeration cabinets sold within the EU. These requirements are designed to drive energy efficiency and environmentally friendly approach for professionals. The European energy labelling scheme will apply to all manufacturers and importers who sell and market products within the EU and it is mandatory across Europe. Important: all products which consume energy above the minimum level will not be able to be sold within the EU from 1 July 2016.

SI 2020 No. 1528.

Important: all products which consume energy above the minimum level will not be able to be sold within the EU from 1 July 2016.

