

### Standard Preparation 600 mm Work Table



## **Short Form Specification**

#### Item No.

The 50mm high worktop in 304 AISI stainless steel, 1mm in thickness, has upturned edges and incorporates a layer of sound deadening, waterproof and fireproof material. Square section legs 40x40mm on 1" height-adjustable feet in 304 AISI stainless steel.

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA #	

### **Main Features**

 Ideal for central positioning in the kitchen, either as island installation or back to back.

### Construction

- 50 mm worktop in 304 AISI stainless steel, 10/10 in thickness with upturned edges and reinforced waterproof underpanel, incorporates a layer of sound deadening materials.
- 400 or 600 mm wide single drawer, chest of 4 drawers, lower shelf, three-sided underframe and set of castors as alternative to the feet, can be fitted as optional on all work tables.
- 40 mm-thick lower shelf (available as optional accessory on some models) slots easily into place at a height of 200 mm from the floor. Lower shelf is compulsory to install the chest of drawers.
- Square section legs and 40 mm height-adjustable feet in 304 AISI stainless steel.
- Table top slots into legs without using screws to facilitate installation.


## **Optional Accessories**

- Set of 4 wheels (2 with brake) PNC 855150 □
  d. 100mm for tables and sinks (total height on wheels= 993 mm)
- Single drawer GN 1/1, 400mm PNC 855280 □
- Additional drawer GN 1/1, PNC 855298 400mm (to set up a chest of 2, 3, 4 drawers)
- Lower shelf for 600mm tables PNC 855362 □ and sinks
- Floor fastening kit for 2 square PNC 865386 □ legs

#### **APPROVAL:**



# Standard Preparation 600 mm Work Table

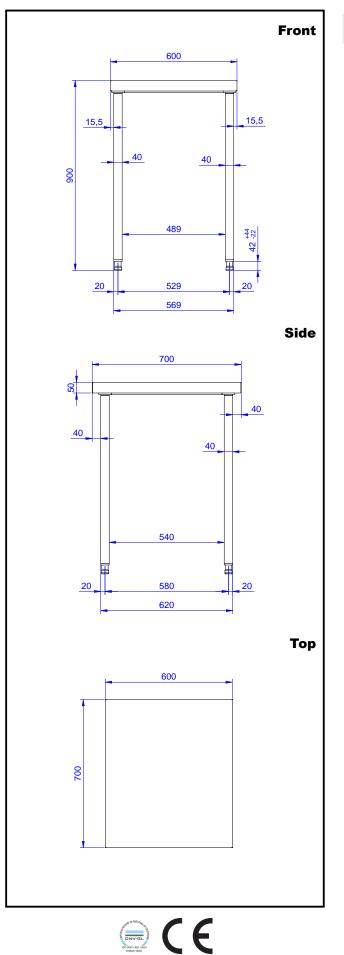

# **Key Information:**

External dimensions, Width:	
<b>133215 (TG600N)</b> 600	mm
External dimensions, Depth: 700	mm
External dimensions, Height: 900	mm
Worktop thickness: 50 n	nm
Net weight: 21 k	g

#### Standard Preparation 600 mm Work Table

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.