

## Eazy Compact touch electric oven 6GN 1/1 with Cleaning System

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



**240055 (ZCD061WLT)**

Eazy compact oven, electric, 6x1/1GN, with touch control, direct steam and 21 humidity level settings, automatic cleaning, left-hinged door

**240056 (ZCD061WRT)**

Eazy compact oven, electric, 6x1/1GN, with touch control, direct steam and 21 humidity level settings, automatic cleaning, right-hinged door

### Short Form Specification

**Item No.** \_\_\_\_\_

Compact oven with instant steam generation and 5" touch user interface.  
Cooking cycles: hot air (50°C-300°C), steam and mixed with 21 different humidity levels (0%-100%, with 5% increment). Variable fan speed with 3 levels.  
Recipe book with 100 pre-loaded programs organized into 7 food categories.  
Programmability: over 300 free recipes with 9-steps cooking.  
Multitimer to cook multiple trays with different timings.  
Double-glass door with LED lights and drip tray with drain to collect excess condensation.  
USB for recipe and HACCP management. Optional core probe.  
Door, front panel and interior in AISI 304 stainless steel.  
Supplied with n.1 tray rack GN 1/1, 11 levels with 30mm pitch.

### Main Features

- Dry hot convection cycle (max 300 °C) ideal for low humidity cooking. Automatic moistener (21 levels) for boilerless steam generation:
  - 0% = no additional moisture (browning, au gratin, baking, pre-cooked food)
  - 10%-20% = low moisture (small portions of meat and fish)
  - 30%-40% = medium low moisture (large pieces of meat, reheating, roasted chicken and proving)
  - 50%-60% = medium moisture (roasted vegetable and first step of roasted meat & fish)
  - 70%-80% = medium-high moisture (stewed vegetables)
  - 90%-100% = high moisture (poached meat and jacket potatoes)
- Automatic Cooking Mode: includes 7 food families (meat, poultry, fish, vegetables, pasta/rice, eggs, pastries and sweet bakery, bread, dessert).
- Delta cooking: the temperature inside the cooking chamber keeps the desired delta from the food core temperature, for more gentle cooking.
- MultiTimer: Special feature to manage up to 10 different cooking cycles at the same time in the same cavity guaranteeing even cooking results.
- EasyService: Feature to have all the cooking programs come out at the same time. The oven tells you when to load the next product.
- One Touch: customizable homepage to allow the user to group their favorite functions for immediate access when operating.
- Variable fan speed with 3 levels.
- Exhaust valve electronically controlled to extract humidity in excess for extra crispy results.
- Automatic cleaning system: 3 different pre-set cycles to clean the cooking cell, according to the actual requirements. The cleaning system is built-in (no need for add-ons).
- Automatic and manual rapid cooling activation when going from a higher to a lower temperature.
- Programmability: over 300 recipes can be stored in the oven's memory, to recreate the exact same recipe at any time. 9-step cooking programs also available.
- USB connection: to download HACCP data, upload/download the recipes.
- Touchscreen: 5" high resolution interface screen with multiple languages .
- Zanussi Professional recommends the use of treated water to guarantee optimal cooking results and extend the life of the appliance. Check local water condition to select the appropriate water filter. More info available on the website.

### Construction


- Double thermo-glazed door with open frame construction, for cool outside door panel. Swing hinged easy-release inner glass on door for easy cleaning.
- Hygienic internal chamber with all rounded corners for easy cleaning.
- Swing hinged front panel for easy service access to main components.
- IPx4 water protection.
- Water consumption during steaming cycle is 2.6 litres per hour.

APPROVAL: \_\_\_\_\_


## Optional Accessories

- |  |            |                          |
|--|------------|--------------------------|
| • Pair of AISI 304 stainless steel grids, GN 1/1                   | PNC 922017 | <input type="checkbox"/> |
| • Grid for whole chicken (4 per grid - 1,2kg each), GN 1/2         | PNC 922086 | <input type="checkbox"/> |
| • Pair of frying baskets   | PNC 922239 | <input type="checkbox"/> |
| • Grid for whole chicken (8 per grid - 1,2kg each), GN 1/1         | PNC 922266 | <input type="checkbox"/> |
| • Base support for stacked compact ovens                           | PNC 922368 | <input type="checkbox"/> |
| • Open base for compact 6x1/1GN oven                               | PNC 922369 | <input type="checkbox"/> |
| • Tray support for compact 6x1/1GN oven - open base                | PNC 922370 | <input type="checkbox"/> |
| • Stacking kit for compact 6x1/1GN oven                            | PNC 922371 | <input type="checkbox"/> |
| • External spray unit for compact 6x1/1GN oven                     | PNC 922372 | <input type="checkbox"/> |
| • Double-step door for opening compact 6x1/1GN oven                | PNC 922377 | <input type="checkbox"/> |
| • Kit to front air filter for compact 6x1/1GN oven                 | PNC 922379 | <input type="checkbox"/> |
| • 1-sensor probe for compact oven 6x1/1GN                          | PNC 922441 | <input type="checkbox"/> |
| • 4-sensor probe for compact oven 6x1/1GN                          | PNC 922442 | <input type="checkbox"/> |
| • Non-stick universal pan, GN 1/1, H=20mm                          | PNC 925000 | <input type="checkbox"/> |
| • Non-stick universal pan, GN 1/1, H=40mm                          | PNC 925001 | <input type="checkbox"/> |
| • Non-stick universal pan, GN 1/1, H=60mm                          | PNC 925002 | <input type="checkbox"/> |
| • Double-face griddle, one side ribbed and one side smooth, GN 1/1 | PNC 925003 | <input type="checkbox"/> |
| • Aluminum grill, GN 1/1   | PNC 925004 | <input type="checkbox"/> |
| • Frying pan for 8 eggs, pancakes, hamburgers, GN 1/1              | PNC 925005 | <input type="checkbox"/> |
| • Flat baking tray with 2 edges, GN 1/1                            | PNC 925006 | <input type="checkbox"/> |
| • Baking tray for 4 baguettes, GN 1/1                              | PNC 925007 | <input type="checkbox"/> |
| • Non-stick universal pan, GN 1/2, H=20mm                          | PNC 925009 | <input type="checkbox"/> |
| • Non-stick universal pan, GN 1/2, H=40mm                          | PNC 925010 | <input type="checkbox"/> |
| • Non-stick universal pan, GN 1/2, H=60mm                          | PNC 925011 | <input type="checkbox"/> |

**Front**

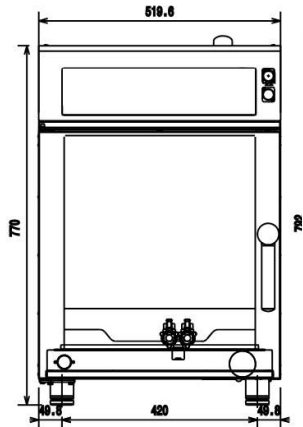


**Side**

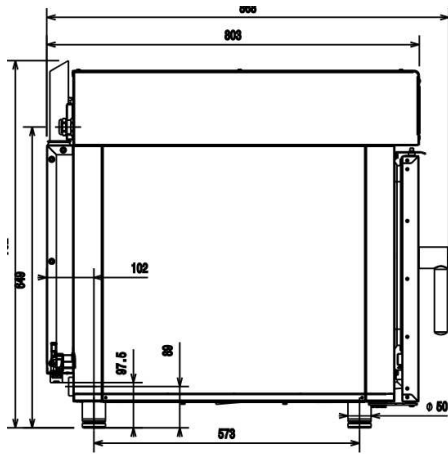

- CW11** = Cold Water inlet 1 (cleaning)
- CW12** = Cold Water Inlet 2 (steam generator)
- D** = Drain
- EI** = Electrical inlet (power)

**Top**

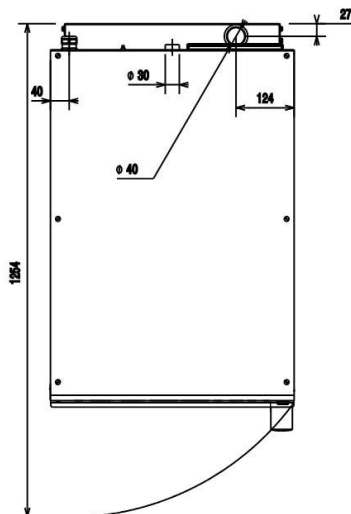

**Electric**

Supply voltage: 400 V/3N ph/50/60 Hz  
Electrical power, max: 6.9 kW

**Water:**

Pressure, min-max: 1.5-3 bar  
Drain "D": 40mm  
Water inlet "CW" connection: 3/4"

**Capacity:**

Trays type: 6 (GN 1/1)

**Key Information:**

External dimensions, Width: 519 mm  
External dimensions, Depth: 803 mm  
External dimensions, Height: 770 mm  
Net weight: 69 kg  
Shipping weight: 81 kg  
Shipping volume: 0.66 m<sup>3</sup>