

## Service Trolleys Heated Banquet Trolley - 10x2/1 GN

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_

**351156 (BT1021H)**Heated banquet trolley  
-10x2/1GN

### Short Form Specification

**Item No.** \_\_\_\_\_

Constructed in double-walled, 304 AISI stainless steel with expanded polyurethane insulated panels. Ergonomic handles for easy movement. Temperature can be set from 30°C to 90°C with digital display. Humidity can be added inside the chamber to keep food from drying. N. 2 fixed castors and N. 2 swivelling castors with brakes, mm125 in diameter. Full perimeter bumpers for added shock protection. By using the optional eutectic plates it is possible to keep dishes at a temperature of +5°C for about two hours. Load capacity: 170 Kg.

### Main Features

- Temperature set-up from +30°C to +90°C, monitored through the digital display, allows to adjust temperature to the specific requirements of the hot dishes.
- Trolley reaches set temperature of 90°C in approximately 35 minutes.
- Heating via dry heat or moisturized air heating, which prevents food from drying out.
- Capable of holding GN 2/1 and GN 1/1 containers or plates on grids (grids included).
- Ergonomic handles to facilitate handling.
- Complies with main international certification bodies and is CE marked.

### Construction


- Constructed in double-walled 304 AISI stainless steel with insulated panels.
- Thick, all-round perimetral bumpers on sides, doors and handles to improve shock absorption.
- Two fixed and two swivelling castors with brakes, all 125 mm in diameter.
- Equipped with spiral cable.

### Optional Accessories


- Pair of AISI 304 stainless steel PNC 922175 □ grids, GN 2/1

**APPROVAL:** \_\_\_\_\_

**Front**

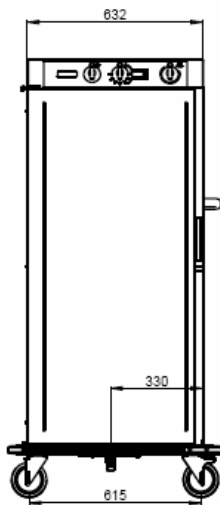


**Side**

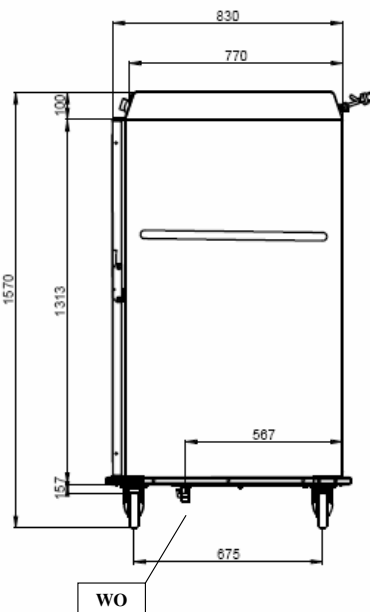

**D** = Drain  
**EI** = Electrical inlet (power)

**Top**



**Electric**

**Supply voltage:**

**351156 (BT1021H)** 230 V/1N ph/50/60 Hz

**Total Watts:**

2.7 kW

**Key Information:**

**GN 2/1 containers - 100** ISO 9001; ISO 14001

**GN 1/1 containers - 100** ISO 9001; ISO 14001

**Load capacity** 170 kg

**External dimensions,**

**Width:** 770 mm

**External dimensions,**

**Depth:** 885 mm

**External dimensions,**

**Height:** 1570 mm

**Net weight:**

118 kg