

Service Trolleys

2 Tier Service Trolley with Handle 1200 mm

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



361208 (CPM122)

2-tier service trolley with handle, 1200 mm, 150 kg max. load

Short Form Specification

Item No. _____

Constructed in 304 AISI stainless steel. Framework in mm25 tubing, completely welded. Seamless, sound-absorbing, shelves with double-folded edges. Shelves are welded to the framework. The handles are an extension of the load-bearing frame. N. 4 swivelling castors, two with brakes, mm125 in diameter, fitted with plastic bumpers. Shelves size mm1200x600. Load capacity: 150 kg, uniformly distributed.

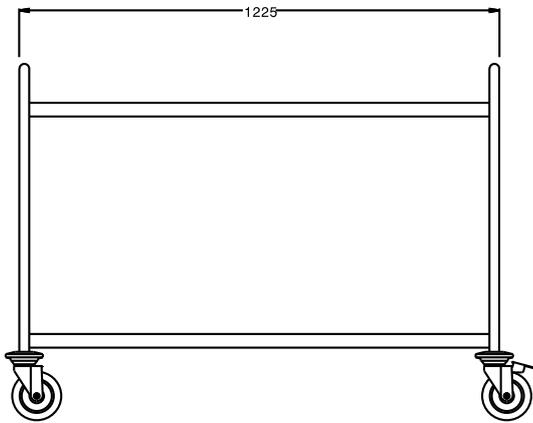
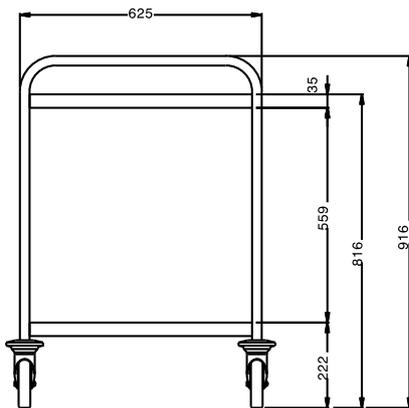
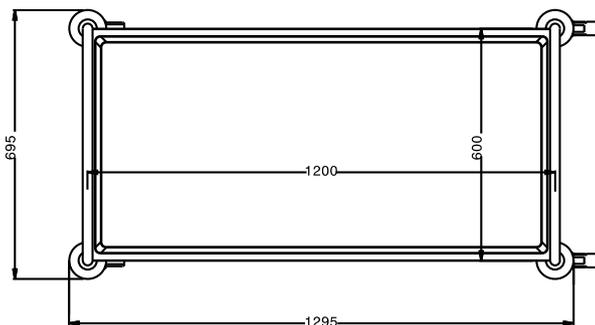
Main Features

- Framework in 25 mm tubing, completely welded.
- Seamless sound-absorbing shelves with double-folded edges welded to the framework.
- Shelves size 1200x600 mm.
- Strong, ergonomic handle is an extension of the load-bearing frame.
- 4 pivoting Ø 125 mm wheels, 2 of which with brakes, fitted with plastic bumpers
- Load capacity of 150 kg uniformly distributed.

Construction

- Constructed entirely in 304 AISI stainless steel.

APPROVAL: _____

Front**Side****Top****Key Information:**

External dimensions, Width:

361208 (CPM122)

1295 mm

External dimensions, Depth:

695 mm

External dimensions, Height:

916 mm

Wheel material:

Zinc plated

Wheel diameter:

Ø 125

Net weight:

25 kg