

Service Trolleys

3 Tier Service Trolley 1200 mm

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



361222 (CP123)

3-tier service trolley, 1200 mm, 100 kg max. load

Short Form Specification

Item No. _____

Constructed in 304 AISI stainless steel. Framework in mm25 tubing, completely welded. Seamless, sound-absorbing, shelves with double-folded edges. Shelves are welded to the framework. N. 4 swivelling castors, two with brakes, mm125 in diameter, fitted with plastic bumpers. Shelves size mm1200x600. Load capacity: 150 kg, uniformly distributed.

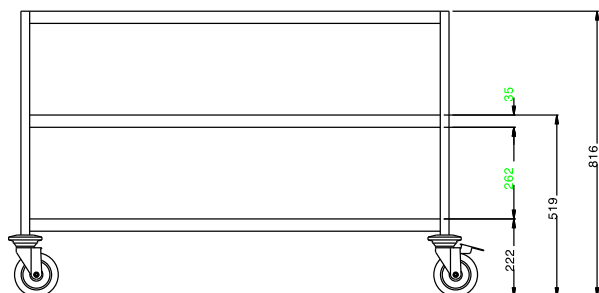

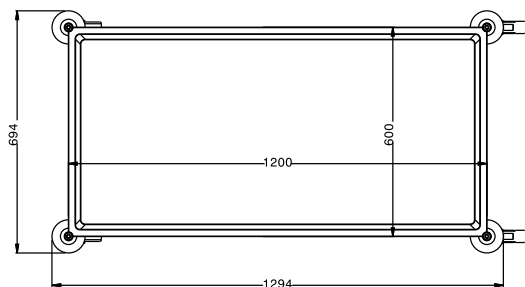
Main Features

- Framework in 25 mm tubing, completely welded.
- Load capacity of 150 kg uniformly distributed.
- Seamless sound-absorbing shelves with double-folded edges welded to the framework.
- Shelves size 1200x600 mm.
- 4 pivoting Ø 125 mm wheels, 2 of which with brakes, fitted with plastic bumpers

Construction

- Constructed entirely in 304 AISI stainless steel.

APPROVAL: _____

Front

Side

Top

Key Information:

External dimensions, Width:

361222 (CP123) 1295 mm

External dimensions, Depth: 695 mm

External dimensions, Height: 816 mm

Wheel material: Zinc plated

Wheel diameter: Ø 125

Net weight: 31 kg