

Modular Cooking Range Line EVO700 2-Hot Plates Electric Boiling Top Range

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



372014 (Z7ECED2R00)

2-hot plate (2,6 kW each)
electric boiling top

Short Form Specification

Item No. _____

To be installed on open base installations, bridging supports or cantilever systems. Two 2.6 kW cast-iron hot plates hermetically sealed to the one-piece top. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Main Features

- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- The two 2.6kW cast-iron plates are hermetically sealed to the one-piece top.
- The special design of the control knob system guarantees against water infiltration.
- IPx4 water protection.
- Suitable for countertop installation.

Construction


- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- External panel in Stainless Steel with Scotch Brite finish.

APPROVAL: _____


Optional Accessories

• Junction sealing kit	PNC 206086	☐
• Support for bridge type installation, 800 mm	PNC 206137	☐
• Support for bridge type installation, 1000 mm	PNC 206138	☐
• Support for bridge type installation, 1200 mm	PNC 206139	☐
• Support for bridge type installation, 1400 mm	PNC 206140	☐
• Support for bridge type installation, 1600 mm	PNC 206141	☐
• Support for bridge type installation, 400 mm	PNC 206154	☐
• Frontal handrail 400 mm	PNC 206166	☐
• Frontal handrail 800 mm	PNC 206167	☐
• Large handrail (portioning shelf) 400 mm	PNC 206185	☐
• Large handrail (portioning shelf) 800 mm	PNC 206186	☐
• Frontal handrail 1200 mm	PNC 206191	☐
• Frontal handrail 1600 mm	PNC 206192	☐
• Right and left side handrails	PNC 206240	☐
• Water column with swivel arm (water column extension not included)	PNC 206289	☐
• Water column extension	PNC 206291	☐
• Chimney upstand, 400 mm	PNC 206303	☐
• 2 side covering panels, height 250 mm, depth 700 mm	PNC 206320	☐
• Chimney grid net, 400mm	PNC 206400	☐

Front

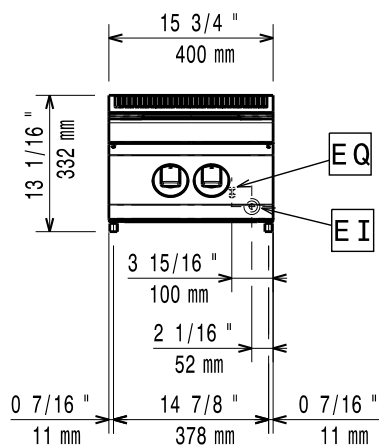


Side

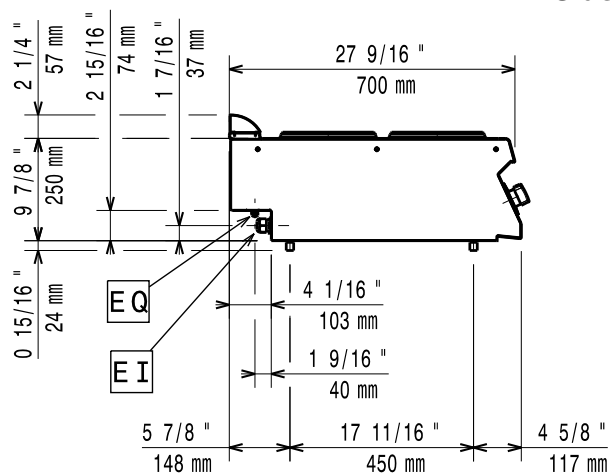

EI = Electrical inlet (power)
 EQ = Equipotential screw

Top

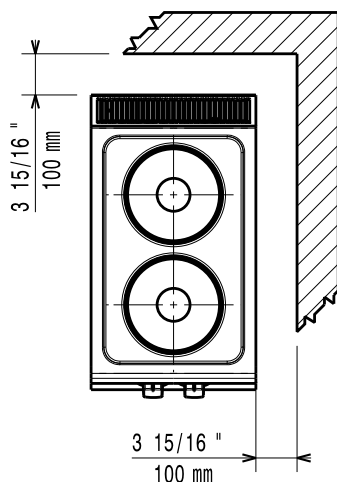

Electric

Supply voltage: 380-400 V/3 ph/50-60 Hz
 Predisposed for:
 Total Watts: 5.2 kW

Key Information:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Net weight: 20 kg
 Shipping weight: 23.8 kg
 Shipping height: 550 mm
 Shipping width: 460 mm
 Shipping depth: 820 mm
 Shipping volume: 0.21 m³
 Certification group: EH72T
 Front Plates Power: 2.6 - 0 kW
 Back Plates Power: 2.6 - kW
 Front Plates dimensions: Ø 230
 Back Plates dimensions: Ø 230