

## Modular Cooking Range Line EVO700 4-Hot Square Plates Electric Boiling Top Range

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



372017 (Z7ECEH4Q00) 4-hot square plate (2,6 kW each) electric boiling top

372130 (Z7ECEH4Q0N) 4-hot square plate (2,6 kW each) electric boiling top

### Short Form Specification

Item No. \_\_\_\_\_

To be installed on open base installations, bridging supports or cantilever systems. Four 2.6 kW square cast-iron hot plates hermetically sealed to the one-piece top. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

### Main Features

- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- The four 2.6kW cast-iron square plates are hermetically sealed to the one-piece top.
- The special design of the control knob system guarantees against water infiltration.
- IPx4 water protection.
- Suitable for countertop installation.


### Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

APPROVAL: \_\_\_\_\_

### Optional Accessories

- Junction sealing kit PNC 206086
- Support for bridge type installation, 800 mm PNC 206137
- Support for bridge type installation, 1000 mm PNC 206138
- Support for bridge type installation, 1200 mm PNC 206139
- Support for bridge type installation, 1400 mm PNC 206140
- Support for bridge type installation, 1600 mm PNC 206141
- Frontal handrail 800 mm PNC 206167
- 2 cast iron plate bars for electric cooking top PNC 206168
- Large handrail (portioning shelf) 800 mm PNC 206186
- Frontal handrail 1200 mm PNC 206191
- Frontal handrail 1600 mm PNC 206192
- Right and left side handrails PNC 206240
- Water column with swivel arm (water column extension not included) PNC 206289
- Water column extension PNC 206291
- Chimney upstand, 800 mm PNC 206304
- 2 side covering panels, height 250 mm, depth 700 mm PNC 206320
- Chimney grid net, 400mm PNC 206400

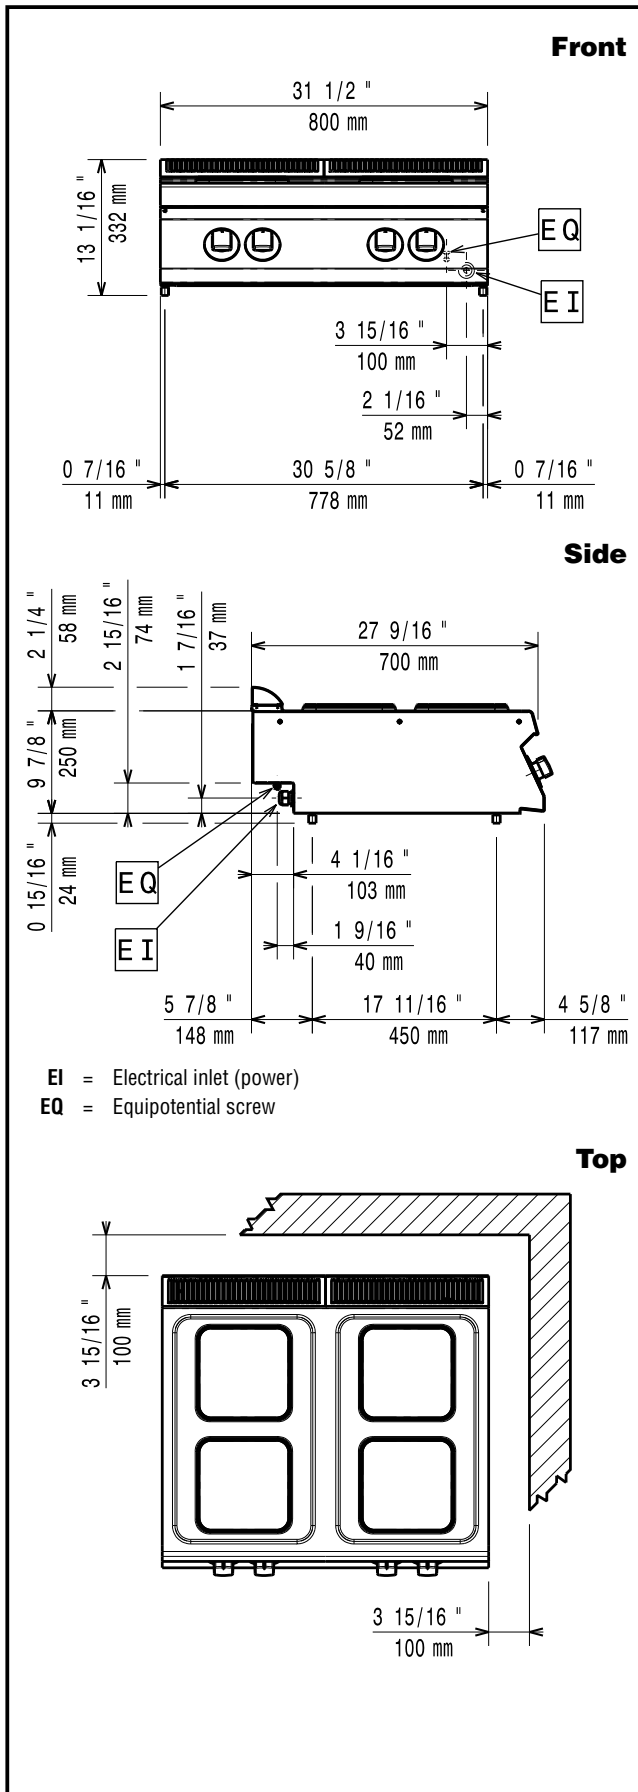

**Electric**

**Supply voltage:**

372017 (Z7ECEH4Q00)	380-400 V/3 ph/50/60 Hz
372130 (Z7ECEH4Q0N)	230 V/3 ph/50/60 Hz

**Total Watts:**

10.4 kW

**Predisposed for:**

372017 (Z7ECEH4Q00)	380-400V 3~ 50/60Hz
	9-10,4kW

**Key Information:**

<b>Front Plates Power:</b>	2.6 - 2.6 kW
<b>Back Plates Power:</b>	2.6 - 2.6 kW
<b>Front Plates dimensions:</b>	230x230 230x230
<b>Back Plates dimensions:</b>	230x230 230x230
<b>Net weight:</b>	40 kg

**Shipping weight:**

372017 (Z7ECEH4Q00)	47 kg
372130 (Z7ECEH4Q0N)	55 kg

**Shipping height:**

372017 (Z7ECEH4Q00)	530 mm
372130 (Z7ECEH4Q0N)	540 mm

**Shipping width:**

372017 (Z7ECEH4Q00)	820 mm
372130 (Z7ECEH4Q0N)	830 mm

**Shipping depth:**

372017 (Z7ECEH4Q00)	860 mm
372130 (Z7ECEH4Q0N)	850 mm

**Shipping volume:**

372017 (Z7ECEH4Q00)	0.37 m <sup>3</sup>
372130 (Z7ECEH4Q0N)	0.38 m <sup>3</sup>

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

**Certification group:**

372017 (Z7ECEH4Q00)	EH74T
372130 (Z7ECEH4Q0N)	N7CE1