

Modular Cooking Range Line EVO700 6-Burner Gas Range on Electric Oven with Cupboard

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA #	



372006 (Z7GCGL6C20)

6-burner (5,5 kW each) gas range on electric oven (6 kW) and cupboard base

Short Form Specification

Item No.

To be installed on stainless steel feet with height adjustment up to 50 mm. High efficiency flower flame burners with flame regulator and protected pilot light. Flame failure device as standard on burners to protect against accidental extinguishing. Stainless steel oven chamber with 3 levels of runners to accomodate 2/1 GN shelves (2 steam pans). Ribbed oven base plate. Exterior panels of unit in stainless steel with Scotch Brite finish. Pan supports in heavy duty cast iron. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Main Features

- Unit to have stainless steel feet with height adjustment up to 50 mm.
- The six 5.5 kW high efficiency flower flame burners allow the flame to adapt to different size pans.
- Cupboard compartment for storage of pots, pans, sheet pans etc.
- Gas appliance supplied for use with natural or LPG gas, conversion jets supplied as standard.
- Large sized pan support in cast iron (stainless steel as option) with long center fins to allow the use of the largest down to the smallest pans.
- Pan supports in cast iron are washable in a dishwasher.
- Burners to feature flame regulator.
- Flame failure device on each burner protects against gas leakage when accidental extinguishing of the flame occurs.
- Protected pilot light.
- Base compartment consists of an electric standard oven positioned beneath the base plate. Stainless steel oven chamber to have 3 levels of runners to accomodate 2/1 GN shelves (2 steam pans) and ribbed enamelled steel base plate.
- Ribbed oven base plate.
- Oven thermostat adjustable from 140 °C to 300 °C.
- Double skinned door with pressed internal panel for heat insulation.
- IPx4 water protection.
- Control knobs provide smooth, continuous rotation from min to max power level.

Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

Included Accessories

- 1 of GN2/1 chrome grid for static PNC 164250 oven
- 1 of Door for open base cupboard PNC 206342

Optional Accessories

- GN2/1 chrome grid for static oven
 Junction sealing kit
 PNC 164250 □
 PNC 206086 □
- Draught diverter, 150 mm diameter PNC 206132 🖵
- Matching ring for flue condenser, 150 mm diameter

 PNC 206133 □

APPROVAL:




Modular Cooking Range Line EVO700 6-Burner Gas Range on Electric Oven with Cupboard


• 4 wheels, 2 swivelling with brake (EV0700/900). It is mandatory to install with base supports for feet/wheels.	PNC	206135	
Flanged feet kit	PNC	206136	
Frontal kicking strip for concrete installation, 1200 mm	PNC	206151	
 Frontal kicking strip for concrete installation, 1600 mm 	PNC	206152	
 Frontal kicking strip, 1200 mm 	PNC	206178	
 Frontal kicking strip, 1600 mm 	PNC	206179	
Frontal handrail 1200 mm	PNC	206191	
Frontal handrail 1600 mm	PNC	206192	
• 4 feet for concrete installation (not for 900 line freestanding grill)		206210	
Right and left side handrails	PNC	206240	
 2 supports with side runners for 4 GN 1/1 containers for open base cupboards (multifunctional cookers, solid top and gas ranges with cupboard) 	PNC	206244	
• Flue condenser for 1 module, 150 mm diameter	PNC	206246	
 Pair of side kicking strips 	PNC	206249	
 Electric heating kit for cupboards 	PNC	206259	
Single burner smooth plate for direct cooking - fits frontal burners only	PNC	206260	
Single burner ribbed plate for direct cooking- fits frontal burners only	PNC	206261	
Single burner radiant plate for pan support	PNC	206264	
 Pair of side kicking strips (concrete installation) 	PNC	206265	
Water column with swivel arm (water column extension not included)	PNC	206289	
Water column extension	PNC	206291	
 Stainless steel grid for 2 burners 	PNC	206297	
Chimney upstand, 1200 mm	PNC	206306	
• 2 side covering panels, height 700 mm, depth 700 mm	PNC	206319	
 Door for open base cupboard 	PNC	206342	
• 2 drawers for open base, height 100 mm	PNC	206360	
 Wok pan support for open burners (EV0700/900) 	PNC	206363	
Base support for feet or wheels - 1200mm (EV0700/EV0900)	PNC	206368	
 Base support for feet or wheels - 1600mm (EVO700/900) 	PNC	206369	
• Rear paneling - 1200mm (EV0700/900)	PNC	206376	
Kit town gas nozzles (G150) for EV0700 gas range		206387	
Chimney grid net, 500mm	PNC	206402	
 Kit G.25.3 (NI) gas nozzles for 700 top and - freestanding on oven - gas cookers 	PNC	206460	






Modular Cooking Range Line EVO700 6-Burner Gas Range on Electric Oven with Cupboard

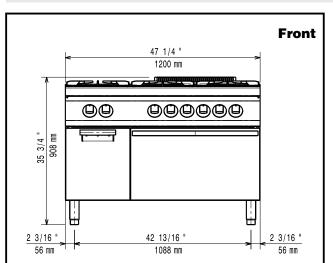

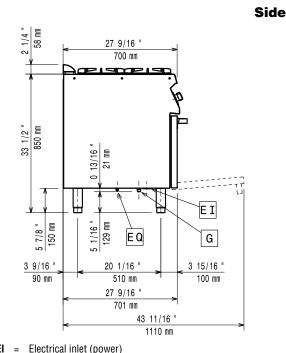

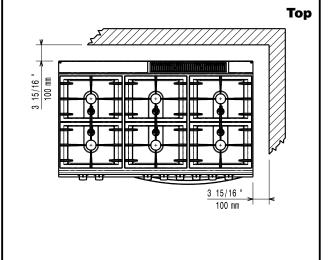

Gas connection

Electric

Supply voltage: 380-400 V/3N ph/50/60 Hz

380-400V 3N~ 50/60 Hz 5,4-6

Predisposed for: Kw
Electrical power max: 6 kW
Total Watts: 6 kW

Gas

Gas Power: 33 kW

Standard gas delivery: Natural Gas G20 (20mbar)

Gas Type Option: LPG;Town **Gas Inlet:** 1/2"

Key Information:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Oven Heat Input: 6 kW

Oven working Temperature: 140 °C MIN; 300 °C MAX

Oven Cavity Dimensions (width): 540 mm Oven Cavity Dimensions (height): 300 mm Oven Cavity Dimensions (depth): 650 mm

Storage Cavity Dimensions

(width): 330 mm

Storage Cavity Dimensions

(height): 380 mm

Storage Cavity Dimensions

640 mm (depth): Net weight: 120 kg Shipping weight: 131 ka Shipping height: 1090 mm Shipping width: 820 mm Shipping depth: 1300 mm Shipping volume: 1.16 m³ **Front Burners Power:** 5.5 - 5.5 kW **Back Burners Power:** 5.5 - 5.5 kW Middle Burners Power: 5.5 - 0/5.5 - 0 kW



Modular Cooking Range Line EVO700 6-Burner Gas Range on Electric Oven with Cupboard