

#### Modular Cooking Range Line EVO700 6-Burner Gas Range on Open base



372179 (Z7GCGL6CO0)

6-burner (5,5 kW each) gas range on open base

## **Short Form Specification**

#### Item No.

To be installed on stainless steel feet with height adjustment up to 50 mm. High efficiency flower flame burners with flame regulator and protected pilot light. Flame failure device as standard on burners to protect against accidental extinguishing. Exterior panels in stainless steel with Scotch Brite finish. Pan supports in heavy duty cast iron. Right-angled side edges to allow flush-fitting junction between units.

ITEM #			
MODEL #			
NAME #			
<u>SIS #</u>			
AIA #			

#### **Main Features**

- Gas appliance supplied for use with natural or LPG gas, conversion jets supplied as standard.
- Large sized pan support in cast iron (stainless steel as option) with long center fins to allow the use of the largest down to the smallest pans.
- Flame failure device on each burner protects against gas leakage when accidental extinguishing of the flame occurs.
- · Protected pilot light.
- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- Pan supports in cast iron are washable in a dishwasher.
- Burners to feature flame regulator.
- IPx4 water protection.
- The six 5.5 kW high efficiency flower flame burners allow the flame to adapt to different size pans.
- Control knobs provide smooth, continuous rotation from min to max power level.

#### Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- One piece pressed 1.5 mm work top in Stainless steel.

**APPROVAL:** 

Zanussi Professional www.zanussiprofessional.com



## Modular Cooking Range Line EV0700 6-Burner Gas Range on Open base

# **Optional Accessories**


C	<b>Optional Accessories</b>			
•	Junction sealing kit	PNC	206086	
•	Draught diverter, 150 mm diameter	PNC	206132	
•	Matching ring for flue condenser, 150 mm diameter	PNC	206133	
•	4 wheels, 2 swivelling with brake (EV0700/900). It is mandatory to install with base supports for feet/wheels.	PNC	206135	
•	Flanged feet kit	PNC	206136	
	Frontal kicking strip for concrete installation, 1200 mm	PNC	206151	
•	Frontal kicking strip for concrete installation, 1600 mm	PNC	206152	
•	Frontal kicking strip, 1200 mm	PNC	206178	
•	Frontal kicking strip, 1600 mm	PNC	206179	
•	Frontal handrail 1200 mm	PNC	206191	
•	Frontal handrail 1600 mm		206192	
•	4 feet for concrete installation (not for 900 line freestanding grill)	PNC	206210	
•	Right and left side handrails	PNC	206240	
•	2 supports with side runners for 4 GN 1/1 containers for open base cupboards (multifunctional cookers, solid top and gas ranges with cupboard)	PNC	206244	
•	Central support for installation of drawers and grid supports for open base cupboards	PNC	206245	
•	Flue condenser for 1 module, 150 mm diameter	PNC	206246	
•	Pair of side kicking strips	PNC	206249	
•	Electric heating kit for cupboards	PNC	206259	
•	Single burner smooth plate for direct cooking - fits frontal burners only	PNC	206260	
•	Single burner ribbed plate for direct cooking- fits frontal burners only	PNC	206261	
•	Single burner radiant plate for pan support	PNC	206264	
•	Pair of side kicking strips (concrete installation)	PNC	206265	
•	Water column with swivel arm (water column extension not included)	PNC	206289	
•	Water column extension	PNC	206291	
•	Stainless steel grid for 2 burners	PNC	206297	
•	Chimney upstand, 1200 mm	PNC	206306	
•	Door for open base cupboard	PNC	206342	
•	2 drawers for open base, height 100 mm		206360	
•	Wok pan support for open burners (EV0700/900)	PNC	206363	
•	Base support for feet or wheels - 800mm (EV0700/900)	PNC	206367	
•	Base support for feet or wheels - 1200mm (EV0700/EV0900)	PNC	206368	


- Base support for feet or wheels 1600mm PNC 206369 (EV0700/900)
- Rear paneling 1200mm (EV0700/900) PNC 206376 🛛
- Chimney grid net, 500mm
  PNC 206402
- Kit G.25.3 (NI) gas nozzles for 700 top and PNC 206460 - freestanding on oven - gas cookers

• Pressure regulator for gas units PNC 927225



### Modular Cooking Range Line EV0700 6-Burner Gas Range on Open base

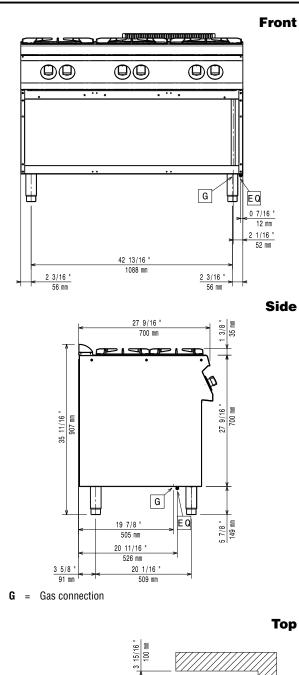



## Gas

Gas Power:	33 kW
Standard gas delivery:	Natural Gas G20 (20mbar)
Gas Type Option:	LPG;Town
Gas Inlet:	1/2"

#### **Key Information:**

Oven working Temperature:	0 °C MIN; 0 °C MAX		
Net weight:	75 kg		
Shipping weight:	ISO 9001; ISO 14001; ISO 45001; ISO 50001 kg		
Shipping height:	1090 mm		
Shipping width:	820 mm		
Shipping depth:	1300 mm		
Shipping volume:	1.16 m <sup>3</sup>		
Front Burners Power:	5.5 - 5.5 kW		
Back Burners Power:	5.5 - 5.5 kW		
Middle Burners Power:	5.5 - 0/5.5 - 0 kW		
Certification group:	N7CG		
Back Burners Dimension - mm	Ø60 Ø60		
Front Burners Dimension - mm	Ø60 Ø60		
Middle Burners Dimension - mm	Ø 60 Ø 60		
If appliance is get up or post to or against temperature consitive			

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Modular Cooking Range Line EVO700 6-Burner Gas Range on Open base

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.