

Modular Cooking Range Line EVO700 One Well Electric Fryer Top 7 liter

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____

**372075 (Z7FRED1B00)**

7-lt electric fryer top with 1 "V" shape well (external heating elements), 1 basket and lid included

372140 (Z7FRED120N)

7-lt electric fryer top with 1 "V" shape well (external heating elements) and 1 basket

Short Form Specification

Item No. _____

To be installed on open base installations, bridging supports or cantilever systems. High efficiency infrared heating elements (5.4kW) attached to the outside of the well. Deep drawn V-shaped well. Oil drains through a tap on the front. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Main Features

- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- Deep drawn V-Shaped well.
- High efficiency infrared heating elements (5,4kW) are attached to the outside of the well.
- Thermostatic regulation of oil temperature up to a maximum of 185 °C.
- Overheat protection thermostat as standard on all units.
- Oil drains through a tap positioned on the front the well.
- All major compartments located in front of unit for ease of maintenance.
- IPx4 water protection.
- Optional portable oil quality monitoring tool (code 9B8081) for efficient oil management. (only for 372075)
- Suitable for countertop installation. (only for 372075)

Construction

- Interior of well with rounded corners for ease of cleaning.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

Sustainability

- This model is compliant with Swiss Energy Efficiency Ordinance (730.02). (only for 372075)

APPROVAL: _____

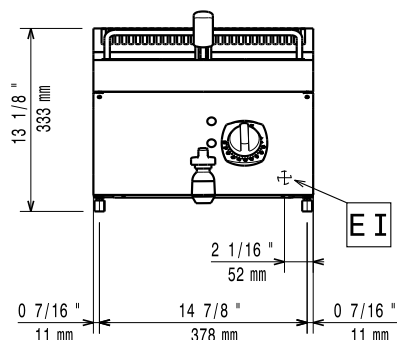
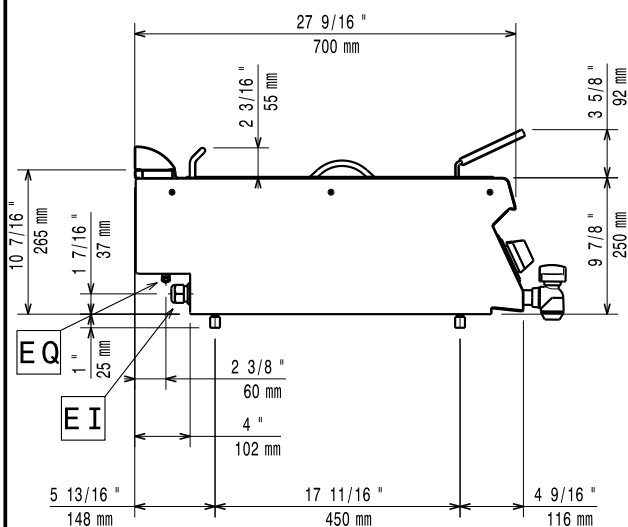
Included Accessories

- 1 of Basket for 7lt top and free standing PNC 921608 fryers

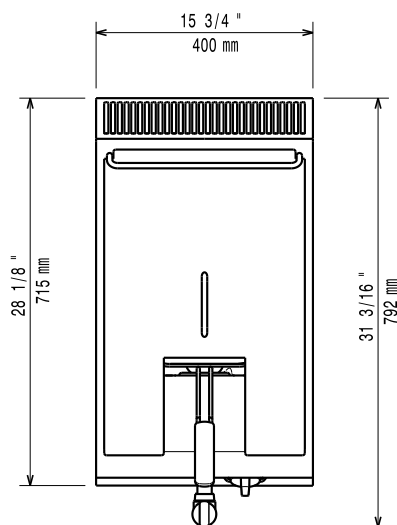
Optional Accessories

- | | | |
|--|------------|--------------------------|
| • Junction sealing kit (only for 372075) | PNC 206086 | ☐ |
| • Support for bridge type installation, 800 mm | PNC 206137 | ☐ |
| • Support for bridge type installation, 1000 mm | PNC 206138 | ☐ |
| • Support for bridge type installation, 1200 mm | PNC 206139 | ☐ |
| • Support for bridge type installation, 1400 mm | PNC 206140 | ☐ |
| • Support for bridge type installation, 1600 mm | PNC 206141 | ☐ |
| • Support for bridge type installation, 400 mm | PNC 206154 | ☐ |
| • Frontal handrail 400 mm | PNC 206166 | ☐ |
| • Frontal handrail 800 mm | PNC 206167 | ☐ |
| • Large handrail (portioning shelf) 400 mm | PNC 206185 | ☐ |
| • Large handrail (portioning shelf) 800 mm | PNC 206186 | ☐ |
| • Frontal handrail 1200 mm | PNC 206191 | ☐ |
| • Frontal handrail 1600 mm | PNC 206192 | ☐ |
| • Right and left side handrails (only for 372075) | PNC 206240 | ☐ |
| • Chimney upstand, 400 mm | PNC 206303 | ☐ |
| • Back handrail 800 mm (only for 372075) | PNC 206308 | ☐ |
| • 2 side covering panels, height 250 mm, depth 700 mm | PNC 206320 | ☐ |
| • Base support for feet or wheels - 400mm (EVO700/900) (only for 372140) | PNC 206366 | ☐ |
| • Chimney grid net, 400mm (only for 372075) | PNC 206400 | ☐ |
| • Basket for 7lt top and free standing fryers | PNC 921608 | ☐ |
| • 2 baskets for 2x5/12lt electric fryers (only for 372140) | PNC 960638 | ☐ |

Modular Cooking Range Line EVO700 One Well Electric Fryer Top 7 liter

Front

Side


EI = Electrical inlet (power)
EQ = Equipotential screw

Top


Electric

Supply voltage:

372075 (Z7FRED1B00)	380-400 V/3N ph/50-60 Hz
372140 (Z7FRED120N)	230 V/3 ph/50/60 Hz

Predisposed for:

Total Watts:	5.4 kW
--------------	--------

Key Information:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Usable well dimensions (width):	240 mm
Usable well dimensions (height):	235 mm
Usable well dimensions (depth):	380 mm
Well capacity:	5.5 lt MIN; 7 lt MAX
Thermostat Range:	105 °C MIN; 185 °C MAX
Net weight:	30 kg
Shipping weight:	
372075 (Z7FRED1B00)	29 kg
372140 (Z7FRED120N)	35 kg
Shipping height:	
372075 (Z7FRED1B00)	520 mm
372140 (Z7FRED120N)	540 mm
Shipping width:	
372075 (Z7FRED1B00)	460 mm
372140 (Z7FRED120N)	500 mm
Shipping depth:	820 mm
Shipping volume:	
372075 (Z7FRED1B00)	0.2 m³
372140 (Z7FRED120N)	0.22 m³
Certification group:	
372075 (Z7FRED1B00)	EFE71M07
372140 (Z7FRED120N)	N7FE2