# ZANUSSI
**PROFESSIONAL**

## Modular Cooking Range Line EVO700 Full Module Electric Char-Grill Top

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____

**372240 (Z7GREHGS0U)**          Electric grill top, full module

## Short Form Specification

**Item No.** _____

To be installed on open base installations, bridging supports or cantilever systems. Heating via incoloy armoured heating elements placed below the cooking plate. Cooking surface grids in enameled cast iron, easily removable for cleaning. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

## Main Features

- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- Heating via incoloy armoured heating elements below the cooking plate.
- Stainless steel high splash guards on the rear and sides of cooking surface. Splash guards can be easily removed for cleaning and are dishwasher-safe.
- Scraper for cleaning of grilling grids included.
- Cast iron grids can be adjusted on two levels.
- Energy regulation through a control knob.
- Heating element can be tilted frontally for easy cleaning.
- The low temperature of the external panels allow to work in safety.
- Cooking grids made in highly resistant enameled cast iron for easy cleaning.
- Suitable for countertop installation.

## Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
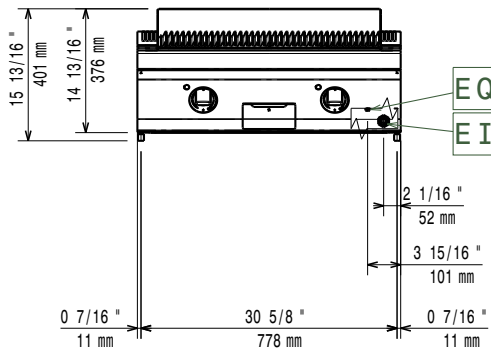- IPx4 water protection.

APPROVAL:

Part of **Electrolux** Professional Group

**Zanussi Professional**
www.zanussiprofessional.com

## Included Accessories

- 1 of Scraper for cast iron grills                 PNC 206422
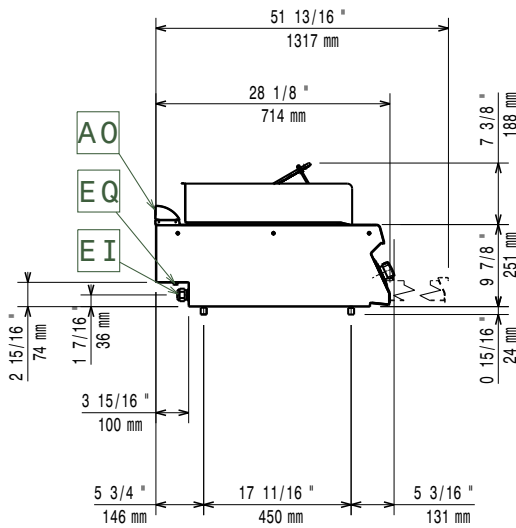
## Optional Accessories

- Junction sealing kit                              PNC 206086    ❏
- Support for bridge type installation, 800 mm      PNC 206137    ❏
- Support for bridge type installation, 1000 mm     PNC 206138    ❏
- Support for bridge type installation, 1200 mm     PNC 206139    ❏
- Support for bridge type installation, 1400 mm     PNC 206140    ❏
- Support for bridge type installation, 1600 mm     PNC 206141    ❏
- Frontal handrail 800 mm                           PNC 206167    ❏
- Large handrail (portioning shelf) 800 mm          PNC 206186    ❏
- Frontal handrail 1200 mm                          PNC 206191    ❏
- Frontal handrail 1600 mm                          PNC 206192    ❏
- Right and left side handrails                     PNC 206240    ❏
- Chimney upstand, 800 mm                           PNC 206304    ❏
- 2 side covering panels, height 250 mm, depth 700 mm   PNC 206320    ❏
- Chimney grid net, 400mm                           PNC 206400    ❏
- Stainless steel grid for free standing wide top grills (EVO700))   PNC 206416    ❏
- Kit height adjustment support grill grids         PNC 206418    ❏
- Scraper for grids with drainage channels - top grills   PNC 206421    ❏
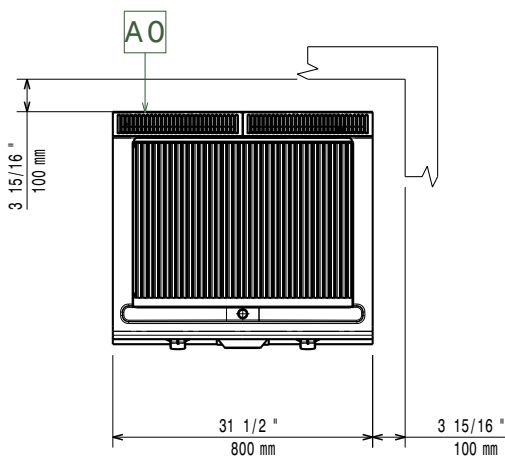- Scraper for cast iron grills                      PNC 206422    ❏

**Modular Cooking Range Line
EVO700 Full Module Electric Char-Grill Top**

The company reserves the right to make modifications to the products
without prior notice. All information correct at time of printing.

2025.02.04

**Front**

**Side**

**EI** = Electrical inlet (power)
**EQ** = Equipotential screw

**Top**

## Electric

**Supply voltage:**

| | |
|---|---|
| 372240 (Z7GREHGS0U) | 380-400 V/3N ph/50/60 Hz |
| **Electrical power max.:** | 8 kW |
| **Total Watts:** | 8 kW |
| **Predisposed for:** | 380-400V 3N~ 50/60Hz 7,2-8kW |

## Key Information:

| | |
|---|---|
| **Cooking surface width:** | 631 mm |
| **Cooking surface depth:** | 478 mm |
| **Net weight:** | 42 kg |
| **Shipping weight:** | 67 kg |
| **Shipping height:** | 540 mm |
| **Shipping width:** | 820 mm |
| **Shipping depth:** | 860 mm |
| **Shipping volume:** | 0.38 m³ |

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

**Certification group:** N7GE

2025.02.04