

Modular Cooking Range Line EVO900 6-Burner Gas Range 10kW on Gas Oven with Cupboard

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



392014 (Z9GCGL6S1M)

6-burner (10 kW each) gas
range on gas oven (8,5 kW)
and cupboard base

Short Form Specification

Item No.

To be installed on open base installations, bridging supports or cantilever systems. High efficiency flower flame burners with continuous power regulation and optimized combustion. Flame failure device as standard on burners to protect against accidental extinguishing. Exterior panels of unit in stainless steel with Scotch Brite finish. Pan supports in heavy duty stainless steel. Extra strength work top in heavy duty 2 mm stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Main Features

- Unit to be mounted on stainless steel feet with height adjustment up to 50 mm. Unit can be easily mounted on cantilever systems.
- The six 10 kW high efficiency burners are available in 100 mm diameter with continuous power regulation from 2.2 kW to 10 kW.
- Cupboard compartment for storage of pots, pans, sheet pans etc.
- Gas appliance supplied for use with natural or LPG gas, conversion jets supplied as standard.
- Large sized pan support in cast iron (stainless steel as option) with long center fins to allow the use of the largest down to the smallest pans.
- Burners with optimized combustion.
- Flame failure device on each burner protects against gas leakage when accidental extinguishing of the flame occurs.
- Protected pilot light.
- Base compartment consists of a gas heated standard oven with stainless steel burners and self stabilizing flame positioned beneath the base plate. Oven chamber to have 3 levels of runners to accommodate 2/1 GN shelves (2 steam pans) and ribbed cast iron base plate.
- Oven thermostat adjustable from 120 °C to 280 °C.
- 40 mm thick oven door for heat insulation.
- The special design of the control knob system guarantees against water infiltration.
- IPX5 water protection.
- Control knobs provide smooth, continuous rotation from min to max power level.

Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- AISI 304 stainless steel worktop, 2mm thick.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Pan supports in stainless steel.
- Unit is 900mm deep to give a larger working surface area.

APPROVAL: _____

Included Accessories


- 1 of GN2/1 chrome grid for static oven PNC 164250
- 1 of Door for open base cupboard PNC 206342

Optional Accessories


- | | |
|--|--|
| <ul style="list-style-type: none"> • GN2/1 chrome grid for static oven PNC 164250 <input type="checkbox"/> • Junction sealing kit PNC 206086 <input type="checkbox"/> • Draught diverter, 150 mm diameter PNC 206132 <input type="checkbox"/> • Matching ring for flue condenser, 150 mm diameter PNC 206133 <input type="checkbox"/> • 4 wheels, 2 swivelling with brake (EVO700/900). It is mandatory to install with base supports for feet/wheels. PNC 206135 <input type="checkbox"/> • Flanged feet kit PNC 206136 <input type="checkbox"/> • 2 supports runners for open base 400 mm for GN1/1 PNC 206145 <input type="checkbox"/> • Frontal kicking strip for concrete installation, 1200 mm PNC 206151 <input type="checkbox"/> • Frontal kicking strip for concrete installation, 1600 mm PNC 206152 <input type="checkbox"/> • Pair of side kicking strips for concrete installation PNC 206157 <input type="checkbox"/> • Side handrail for right/left hand PNC 206165 <input type="checkbox"/> • Single burner smooth plate for direct cooking - fits frontal burners only PNC 206171 <input type="checkbox"/> • Single burner ribbed plate for direct cooking - fits frontal burners only PNC 206172 <input type="checkbox"/> • Frontal kicking strip, 1200 mm PNC 206178 <input type="checkbox"/> • Frontal kicking strip, 1600 mm PNC 206179 <input type="checkbox"/> • Pair of side kicking strips PNC 206180 <input type="checkbox"/> • 2 panels for service duct (single installation) PNC 206181 <input type="checkbox"/> • Frontal handrail 1200 mm PNC 206191 <input type="checkbox"/> • Frontal handrail 1600 mm PNC 206192 <input type="checkbox"/> • 2 panels for service duct (back to back installation) PNC 206202 <input type="checkbox"/> • Pair of cast iron grids for gas ranges and boiling tops PNC 206208 <input type="checkbox"/> • 4 feet for concrete installation (not for 900 line freestanding grill) PNC 206210 <input type="checkbox"/> • Flue condenser for 1 module, 150 mm diameter PNC 206246 <input type="checkbox"/> • Electric heating kit for cupboards PNC 206259 <input type="checkbox"/> • Water column with swivel arm (water column extension not included) PNC 206289 <input type="checkbox"/> • Water column extension PNC 206290 <input type="checkbox"/> • Stainless steel grid for 2 burners PNC 206298 <input type="checkbox"/> • Chimney upstand, 1200 mm PNC 206306 <input type="checkbox"/> • 2 side covering panels, height 700 mm, depth 900 mm PNC 206335 <input type="checkbox"/> • Door for open base cupboard PNC 206342 <input type="checkbox"/> • 2 drawers for open base, height 100 mm PNC 206361 <input type="checkbox"/> | <ul style="list-style-type: none"> • Wok pan support for open burners (EVO700/900) PNC 206363 <input type="checkbox"/> • Base support for feet or wheels - 1200mm (EVO700/EVO900) PNC 206368 <input type="checkbox"/> • Base support for feet or wheels - 1600mm (EVO700/900) PNC 206369 <input type="checkbox"/> • Base support for feet or wheels - 2000mm (EVO700/900) PNC 206370 <input type="checkbox"/> • Rear paneling - 1200mm (EVO700/900) PNC 206376 <input type="checkbox"/> • Kit town gas nozzles (G150) for EVO900 gas ranges on gas oven PNC 206385 <input type="checkbox"/> • Chimney grid net, 400mm PNC 206400 <input type="checkbox"/> • Kit G.25.3 (NI) gas nozzles for 900 freestanding gas cookers on oven PNC 206458 <input type="checkbox"/> • Pressure regulator for gas units PNC 927225 <input type="checkbox"/> |
|--|--|

Modular Cooking Range Line EVO900 6-Burner Gas Range 10kW on Gas Oven with Cupboard

Front

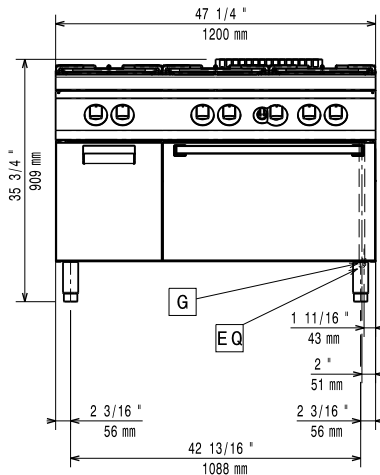


Side

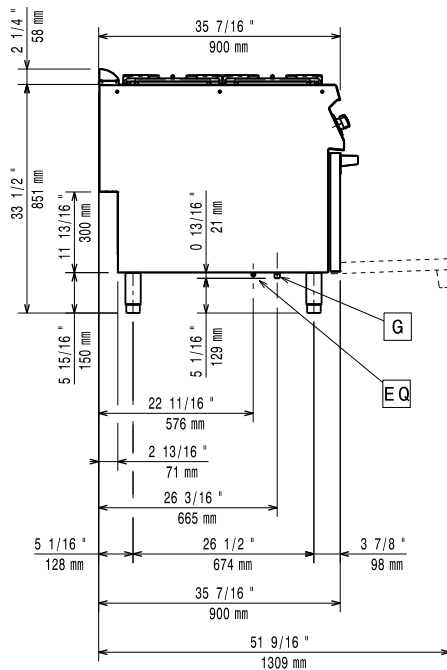

G = Gas connection

Top

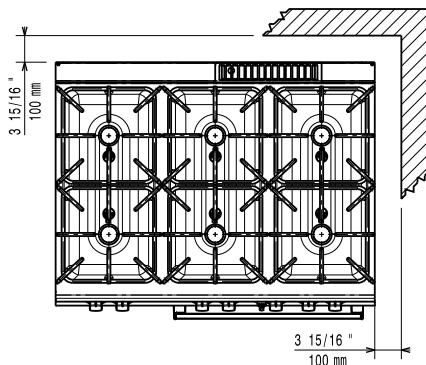

Gas

Gas Power:

392014 (Z9GCGL6S1M)

68.5 kW

Standard gas delivery:

Natural Gas G20 (20mbar)

Gas Type Option:

LPG; Natural Gas

Gas Inlet:

1/2"

Key Information:

Front Burners Power:

ISO 9001; ISO 14001 - ISO 9001;
ISO 14001 kW

Back Burners Power:

10 - 10 kW

Middle Burners Power:

10 - 0/10 - 0 kW

Back Burners Dimension - mm

Ø 100 Ø 100

Front Burners Dimension - mm

Ø 100 Ø 100

Middle Burners Dimension - mm

Ø 100 Ø 100

Oven working Temperature:

120 °C MIN; 280 °C MAX

Oven Cavity Dimensions (width):

575 mm

Oven Cavity Dimensions (height):

300 mm

Oven Cavity Dimensions (depth):

700 mm

Net weight:

203 kg

Shipping weight:

158 kg

Shipping height:

1080 mm

Shipping width:

1020 mm

Shipping depth:

1300 mm

Shipping volume:

1.43 m³

Certification group:

N9CG

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.