

Warewashing Pot&Pan Washer with Automatic Hood and Front/Side Feeding, Multi- Rack Support, 1433mm

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____


506068 (ZPPWEALMS)

 Pot&pan washer, automatic
hood, front/side feeding with
multi-rack support

Short Form Specification

Item No.

304 AISI stainless steel front and side panels, wash tank, tank filter and wash and rinse arms. Double skinned, insulated, hood with automatic opening and closing with safety switch. N. 4 washing cycles and a self-cleaning cycle.

Built-in atmospheric, insulated water boiler (10,5 kW), 18-liter capacity, combined with rinse booster pump guarantee a constant hot rinse temperature of 84°C. Boiler with 304 welding for protection against corrosion.

Wash Safe Control assures the correct water temperature and pressure during the rinse phase to guarantee a perfect rinsing performance independent from the water pressure in the network (min. 0,5 bar).

Thermometer. Electronic control board with digital display.

Pre-arrangements for connection to an automatic detergent dispenser.

Direct through-feed using loading/unloading tables or front-feed loading.

Cell dimensions mm1270x610x620h.

Load capacity: n.6x1/1 GN.

Supplied with: n. 1 basket in stainless steel and n. 2 racks for containers and trays.

Main Features

- Atmospheric insulated boiler combined with the rinse booster pump for perfect rinsing results (water temperature and pressure always constant during rinsing cycles), independent from the inlet water pressure.
- 4 washing programs (one program is continual).
- Low noise level.
- Simple service from the front.
- Automatic start on hood closure.
- Easy to remove wash/rinse arms for cleaning.
- Side through-feed using manual loading and unloading tables or direct manual front-feed loading.
- Large strainer boxes above the water surface and extra strainer in the tank bottom at the pump inlet.
- Self-cleaning cycle to automatically sanitize the dishwasher after use.
- Final rinse only starts when the correct temperature has been reached (waiting device).
- Pre-arrangements for automatic detergent and rinse-aid dispenser.
- Electronic control panel and digital display.
- Adjustable pressure for the lower wash system, according to the weight of the items being washed.
- Automatic boiler empty button.

Construction

- Unit to feature smooth surfaces to facilitate cleaning.
- No pipes inside the washing chamber.
- 304 AISI stainless steel front and side panels, wash tank, tank filter and wash and rinse arms.
- Double-walled construction reduces the levels of noise and heat emitted.
- Double rack support suitable to use also standard rack of 500x500mm.

Sustainability

- Finished in top quality materials to ensure durability.
- Automatic hood opening and closing through safety switch.

Included Accessories

- 2 of Extra rack for containers and trays PNC 864182
- 1 of Extra stainless steel basket for pot PNC 864190 washer 1300mm

Optional Accessories

- | | | |
|--|------------|--------------------------|
| • Filter for total demineralization | PNC 864015 | <input type="checkbox"/> |
| • Filter for partial demineralization | PNC 864017 | <input type="checkbox"/> |
| • Kit to measure total/partial water hardness | PNC 864050 | <input type="checkbox"/> |
| • Extra rack for containers and trays | PNC 864182 | <input type="checkbox"/> |
| • Extra stainless steel basket for pot washer 1300mm | PNC 864190 | <input type="checkbox"/> |
| • Filter for total demineralization | PNC 864367 | <input type="checkbox"/> |
| • Kit for trays in Potwashers | PNC 864471 | <input type="checkbox"/> |

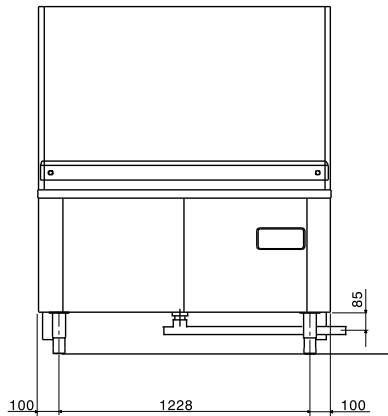
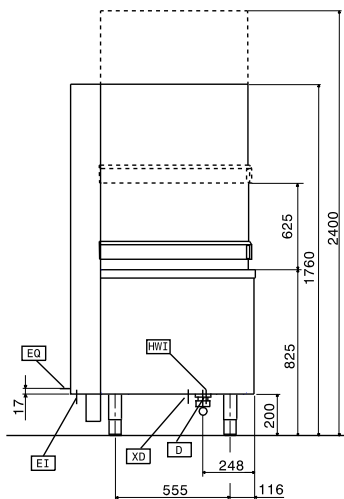
APPROVAL: _____

Part of

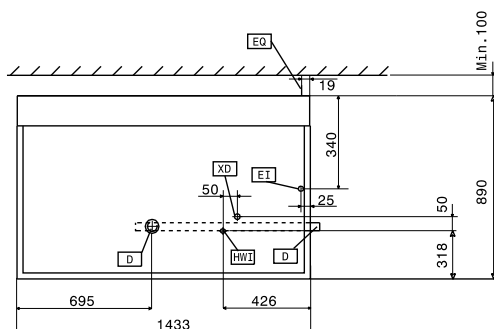

 Electrolux
Professional
Group

Zanussi Professional
 www.zanussiprofessional.com

**Pot&Pan Washer with Automatic Hood and Front/Side Feeding,
Multi-Rack Support, 1433mm**
Warewashing

Front

Side


- D** = Drain
EI = Electrical inlet (power)
EO = Electrical Outlet
HWI = Hot water inlet

Top

Electric

| | |
|--------------------------|-------------------|
| Supply voltage: | 400 V/3N ph/50 Hz |
| Electrical power max: | 26 kW |
| Total Installed Power: | 26 kW |
| Default Installed Power: | 15.5 kW |
| Boiler heating elements: | |
| Wash pump power: | 5 kW |
| Rinse pump power: | 0.28 kW |

Water:

| | |
|---|---------------------|
| Pressure, min-max: | 0.5-7 bar |
| Washing cycle electrical elements: | 10.5 kW |
| Hot rinse cycle duration (sec.): | ISO 9001; ISO 14001 |
| Min hot rinse water consumption (lt/cycle)**: | 7.7 |
| Water supply temperature*: | 50 °C |
| Washing tank capacity (lt): | 110 |
| Boiler Capacity (lt): | 18 |

Key Information:

| | |
|--|-------------------------|
| Rinsing water consumption (per cycle): | 7.7 lt |
| Washing cycle temperature: | 55-65 °C |
| Hot rinse cycle temperature: | 84 °C |
| Working cycles time (sec.): | 180/360/540/inf / / / / |
| N° of working cycles: | 4 (180/360/540/inf) |
| Cell dimensions - width: | 1330 mm |
| Cell dimensions - depth: | 660 mm |
| Cell dimensions - height: | 625 mm |
| External dimensions, Width: | 1433 mm |
| External dimensions, Depth: | 890 mm |
| External dimensions, Height: | 1760 mm |
| Net weight: | 270 kg |

Sustainability

| | |
|--------------|---------|
| Noise level: | <70 dBA |
|--------------|---------|