


ITEM #		
MODEL #		
NAME #		
SIS #		
AIA#		



APPROVAL:

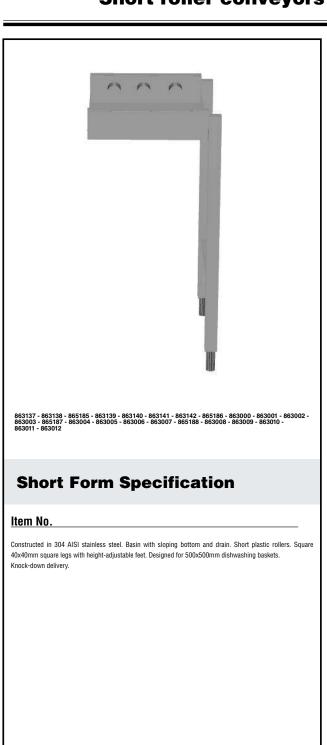

Main Features

- The table can be used in loading and/or unloading sides.
- Suitable to install either a single unit with dishwasher or combined with other tables.
- The table is suitable for both rack type and hood type dishwasher. Rack type dishwasher
 can be connected directly to the table, while there are optional accessories to adapt
 the table with hood type dishwasher.
- Conveyors supplied as knockdown and easy to assemble.
- "Key holes" and "snap on" system reduces the number of screws needed for fast and easy installation.
- Improved end limit switch for easier cleaning and higher reliability.
- · Manual rack movement with short rollers.
- . Drain can be turned 360°.
- Designed to transport 500x500 mm dishwashing baskets.


Construction

- Two legs included.
- Stainless steel feet 50 mm adjustable in height to align the operation height between the dishwasher and table.
- . Thick welded flanges for sturdy connection between the units.
- · All surfaces smooth with polished finish.
- 40x40 mm square tubular legs in AISI 304 stainless steel.
- AISI 304 1,2mm stainless steel basin.
- Self-bearing undershelf eliminates the need for additional frames.
- Conveyors optionally equipped with end-limit switch, end plate, guides for racks, and undershelves.
- · Sloping bottom of the table grants a smooth and rapid drainage.

Sustainability

 The short roller conveyor is available in 600mm length and from 1100mm up to 2600mm with 100mm-step length.



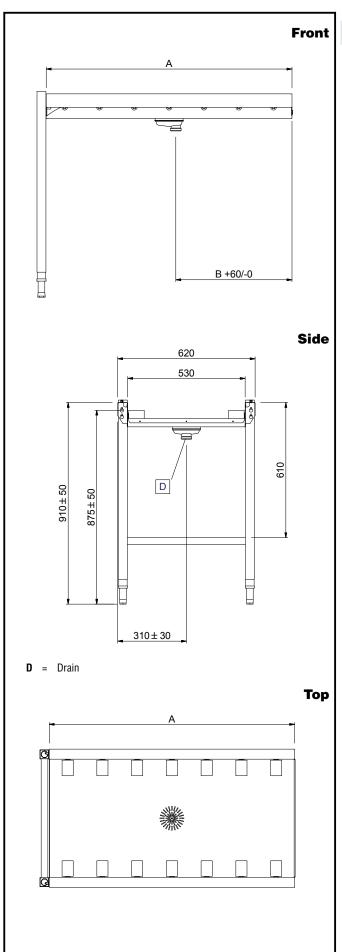

Key Information:	
External dimensions, Width:	
863137 (HSSRC4)	400 mm
863138 (HSSRC5)	500 mm
865185 (HSSRC6)	600 mm
863139 (HSSRC7)	700 mm
863140 (HSSRC8)	800 mm
863141 (HSSRC9)	900 mm
863142 (HSSRC10)	1000 mm
865186 (HSSRC11)	1100 mm
863000 (HSSRC12)	1200 mm
863001 (HSSRC13)	1300 mm
863002 (HSSRC14)	1400 mm
863003 (HSSRC15)	1500 mm
865187 (HSSRC16)	1600 mm
863004 (HSSRC17)	1700 mm
863005 (HSSRC18)	1800 mm
863006 (HSSRC19)	1900 mm
863007 (HSSRC20)	2000 mm
865188 (HSSRC21)	2100 mm
863008 (HSSRC22)	2200 mm
863009 (HSSRC23)	2300 mm
863010 (HSSRC24)	2400 mm
863011 (HSSRC25)	2500 mm
863012 (HSSRC26)	2600 mm
External dimensions, Depth:	620 mm
External dimensions, Height:	910 mm
Net weight:	
863137 (HSSRC4)	9 kg
863138 (HSSRC5)	9 kg
865185 (HSSRC6)	10 kg
863139 (HSSRC7)	11 kg
863140 (HSSRC8)	12 kg
863141 (HSSRC9)	13 kg
863142 (HSSRC10)	14 kg
865186 (HSSRC11)	15 kg
863000 (HSSRC12)	16 kg
863001 (HSSRC13)	17 kg
863002 (HSSRC14)	18 kg
863003 (HSSRC15)	19 kg
865187 (HSSRC16)	20 kg
863004 (HSSRC17)	21 kg
863005 (HSSRC18)	22 kg
863006 (HSSRC19)	23 kg
863007 (HSSRC20)	24 kg
865188 (HSSRC21)	25 kg
863008 (HSSRC22)	26 kg
863009 (HSSRC23) 863010 (HSSRC24)	27 kg 28 kg
, ,	29 kg
863011 (HSSRC25) 863012 (HSSRC26)	29 kg 30 kg
Height adjustment:	50 kg 50/50 mm
Basin material:	Stainless Steel AISI 304 - EN 1.4301
Type of rollers:	Short
.,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	5



Part												_	_	_		- 10		_	_	_				
Part		333	8	152	33	314	314	314	8218	300	300	3000	3000	8 8	300	3000	89	98	518	3000	3000	301	301	301
Part	963077 -	- *	- 8	- 8	- 8	- 86	- 86	- 8	- 8	- 8	- 8	- X	- 8		- 8	- X			- 8	- 8	- 8	- X		*
Part		+									-	/	/	/	-	/	/	-	-	/	-	/	7	7
Mathematic material methods (1) Math		1										/	-	/	-	/	1	-	/	-	-	/	-	7
Part		+	_									-		_			-	-		,	,	,	_	_
Mathematical part of the money of the mone	Plain undershell for roller conveyor, 1500 mm	+	_																					
Part	Plain undershelf for roller conveyor, 1700 mm	_																						
Part	Plain undershelf for roller conveyor, 1800 mm																							
Part	Plain undershelf for roller conveyor, 1900 mm																							
Mathematical parameter Mathematical parame	Plain undershelf for roller conveyor, 2000 mm																	1	`					
Mary																				1				
Mary																					,	/	1	7
Mary	85397 - Plain undershelf for roller conveys, 2400 mm																					-	/	7
SEASON OF THE PROPERTY OF THE	6/408																						7	7
Part																							\neg	7
State Stat		+								/	/	/	/	7	-	7	1	1	/	/	-	/	7	7
SMITT STATE OF THE PROPERTY OF		+	_																					
SENSON MACH 1981		+	_					-																
SUM	Grid undershell, 1400 mm	1	_				-	-	-							_								
Mary		1											-											
SECURITY SEC															-									
Companied 1980 cm Comp	863108 - Grid undersheit, 1800 mm															1								
64 of selected 200 om 1	Grid undershelf, 1900 mm																1	1	1	1	/	-	1	1
8011 1	863110 - Grid undershelf. 2000 mm																	-	-	/	,	/	1	7
8011 100 mm 100 m	85311 - Grid undershell: 2200 mm																			1	/	/	/	7
8011-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1																					-	-	/	7
Second content and 2,500 cms																						-	7	7
Mail an interview 1,000 mm	United State Control of the Control	+																					7	7
MSSES MSSE		+	_									\vdash		-			_					_	-	7
SSSSS		+	-	-	-		_	-	/	-	_		-		_	-	-	-	_	-	_	/	_	$\overline{}$
## MSSES Control (Fig.) 1 control thanking (Fig.) 1 control thanking (Fig.) 1 control thanking (Fig.) 2 control (Fig.)	Emergency stop let for Rack Type Dishwasher 885.55 x 885																							
8031: Call international binary international properties of the connect connec	Connection plate (short) side to connect handling system to hood type dishwasher on the left side	_	_					_									_							
Second S	863164																	_						
86013- Figure and interface conneger, 1100 mm Figure 1 and interface conneger, 1100 mm Figure 2 and interface conneger, 1100 mm Figure 3 and interface conneger is connected directly to Real Type dishwasher with spikes bottom Figure 3 and interface conneger is connected directly to Real Type dishwasher with spikes bottom Figure 3 and interface conneger is connected directly in Real Type dishwasher with spikes bottom Figure 3 and interface conneger is connected directly in Real Type dishwasher with spikes bottom Figure 3 and interface conneger is connected directly in Real Type dishwasher with spikes bottom Figure 3 and interface conneger is connected directly in Real Type dishwasher with spikes bottom Figure 3 and interface conneger is connected directly in Real Type dishwasher with spikes bottom Figure 3 and interface conneger is connected directly in Real Type dishwasher with spikes bottom Figure 3 and interface conneger is connected directly in Real Type dishwasher with spikes bottom Figure 3 and interface conneger is connected directly in Real Type dishwasher with spikes bottom Figure 3 and interface conneger is connected directly in Real Type dishwasher with spikes bottom Figure 3 and interface connected connected connected connected connected																								
## MERCISION FOR MINISTRALL STATE CONTROLL STATE AND ADDRESS AND A		_ ′	1																					
Plan undersided for other conveyer, 1100 mm 1	885219 - Plain undershelf for roller conveyor, 600 mm			1	1	1	1	-	-	1	1	1	1	1	/	1	1	-	1	1	,	/	1	7
Marcian columner for contract conveyer, 1500 mm Marcian conveyer, 1500 mm Marcia	885220 - Pisip underbell for roller consessor 1100 mm								-	/	-	1	/	/	/	1	1	1	1	1	/	/	1	/
March Marc	865921 -													/	/	/	1	1	1	1	/	-	-	-
MSS231- Comment to active in part of deliverable basines, 1100 mm - 1500 mm Section 2500 mm - 2500 mm Section 2500 mm - 2500 mm Section 2500 mm - 2500 mm Section	1 auto discussione real content conten																		/	/	/	/	7	7
## MSD31- Cluster rack for a dishwarder basker, 1800 mm - 2000 mm ## MSD31- Cluster rack for a dishwarder basker, 1800 mm - 2000 mm ## MSD32- Cluster rack for a dishwarder basker, 1800 mm - 2000 mm ## MSD32- Cluster rack for a dishwarder basker, 1800 mm - 2000 mm ## MSD31- Cluster rack for a dishwarder basker, 1800 mm - 2000 mm ## MSD31- Cluster rack for a dishwarder basker, 1800 mm - 2000 mm ## MSD32- Cluster rack for a dishwarder basker, 1800 mm - 2000 mm ## MSD32- Cluster rack for a dishwarder basker, 1800 mm - 2000 mm ## MSD32- Cluster rack for a dishwarder basker, 1800 mm ## MSD32- Cluster rack for a									/	/	/	/	/	/	/	/	/	/	/	/	/	/	7	7
80023		+												/	-	/	/	-	/	/	-	/	_	_
MEDISTAL Contract for the factor teach for 15 dishwaster braken, 2000 mm Contract for the factor teach for 15 dishwaster braken, 2000 mm Contract for the factor teach for 15 dishwaster braken, 2000 mm Contract for the conveyor is connected directly to Road Type Dishwaster) V	Guide rack for 8 dishwasher baskets, 1600 mm - 2000 mm 8/8/2976 -	+	_									-						_	_	_	-	,	_	_
## MEGNAL - Commonton traceluted from plass under sheef and grid undersheef (if to be used if rother conveyor is connected directly to Risk Type dishwasher with spinsh hood) ***Open Strategy or Commonton traceluted from plass under sheef and grid undersheef (if to be used if rother conveyor is connected directly to Risk Type dishwasher with spinsh hood) **Open Strategy or Commonton traceluted from plass undersheef and grid undersheef and gr		+	_				_					\vdash		-				_			_	- +		
\$6033 Controlled and grid undershelder (grid to undershelder (grid undershelder (grid to undershelder (grid undershelder (gri		+-	<u> </u>													L.	L.	<u> </u>						
86334- 601 on discriment, 600 one (80237- 601 of content, 100 one (80237- 601 one content, 100 one (80237																								
86237- Get admindent (130 mm		1															_							
86237- Get admindent (130 mm	86226 - Grid undershell, 600 mm			_ ′	_ ′	/	/	/										1						
\$60233- for understud: 2100 mm \$60253-	88X27 - Grid undershell, 1100 mm								1	1	1	1	1	1	1	1	1	1	1	1	/	1	1	1
\$60233- for understud: 2100 mm \$60253-														1	1	1	1	1	1	1	-	1	/	7
86033-1 V V V V V V V V V V V V V V V V V V V																			1	1	/	1	1	7
55932	846767	1	/	/	/	/	/	/	/	/	/	/	/	/	-	/	/	/	/	/	-	/	-	7
98669.	806460	+	 			-	/	/	/	/	-	-	-	/	-	7	1	-	/	/	-	/	-	$\overline{}$
Grid undershelt, 800 mm	865463	+	-				-	/	/	-	-	\vdash			_	-	-	-	-	-	_	/	-	$\overline{}$
	Grid undershelt, 800 mm								L .								_	<u> </u>						



