Roll-in Compact Refrigerator 750 lt - 1 door

729493 (ARI075R1F)
1-door Roll-in Refrigerator 750lt, 0+10°C, AISI 304, R290

Main Features

- Adjustable bottom door gasket.
- Automatic defrost and automatic evaporation of defrost water.
- Digital control panel with temperature display.
- Excellent space optimisation thanks to the compact dimensions (footprint 0.56m²).
- Lift-up control panel to better access main components.
- Simple cooling unit easily accessible from the rear of the appliance.
- Suitable for all kinds of 18 shelves GN 1/1 trolleys, designed to fit the 18 shelves GN 2/1 trolley available as optional accessory.
- The operating temperature can be adjusted from 0 to +10 °C to suit both meat and dairy storage requirements.
- Ventilated cooling for optimal temperature distribution.
- Complies with main international certification bodies and is CE marked.
- One full door.
- Inner side protectors to protect the internal walls.
- Tropicalized unit.

Construction

- Built-in compressor to suit operating conditions.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Evaporator and fan are placed outside the cell to provide the maximum storage capacity.
- Evaporator cover is easily removable for service.
- External panels are in AISI 304 stainless steel for higher level of hygiene.
- Interior cell and external panel are constructed in 304 AISI stainless steel.
- Lockable door.
- Electrical connection: 220-240V-single phase 50HZ or 220-240V-single phase 60HZ.

User Interface & Data Management

- Large digital white-digit display with humidity selection button (3 preset level), internal temperature display and setting, manual activation of defrost cycle and turbo frost cycle (to rapidly cool warm loads).
- Connect the product (with accessory) to the OneConnected Platform via Wi Fi or ethernet connection for a seamless remote experience. Real-time monitoring and analytics, alarm management, HACCP data management, APIs, and advanced features keep your fridge fully under control.

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Sustainability

- Cabinet fitted with up to 60 mm thickness of Cyclopentane insulation for best insulating performance (thermal conductivity: 0,020 W/m*K). CFC and HCFC-free insulation.
- CFC and HCFC-free insulation.
- Finished in top quality materials to ensure durability.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.

Optional Accessories

PNC Code	Description
Feet, wheels and ramps	
881278	Insulated floor-ramp for 750lt Roll-in Refrigerator
Trolleys	
881521	Trolley for 18x2/1GN roll-in 750L
Other accessories	
881299	Ethernet connector for IR33 (CAREL) refrigerated cabinets and counters

Recommended Detergents

PNC Code	Description
0S2881	S01 STAINLESS STEEL SURFACE POLISHER; 6 BOTTLES X 750ML C/T
0S2883	S03 ALCOHOL BASE DETERGENT; 6 BOTTLES X 750ML; ADR&IMDG&IATA Limited Quantity
0S2884	S04 GLASSES & HARD SURFACES CLEANERS; 6 BOTTLES X 750ML
0S3257	S05 - MULTIPURPOSE DEGREASER; 6PCS X 750ML; ADR&IMDG Limited Quantity

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Technical specifications

Electric	
Supply voltage:	220-240 V/1 ph/50 Hz
Predisposed for:	220-230 V 60 Hz
Compressor power:	1/3 hp
Key Information:	
External dimensions, Width:	750 mm
External dimensions, Depth:	816 mm
External dimensions, Height:	2101 mm
Number and type of doors:	1 Full
External side panels:	Stainless Steel AISI 304
External top panels:	Galvanized Steel
External door material:	Stainless Steel AISI 304
Refrigeration Data	
Operating temperature min.:	0 °C
Operating temperature max.:	10 °C
Sustainability	
Refrigerant type:	R290
Refrigeration power:	520 W
Refrigerant weight:	145 g

Front

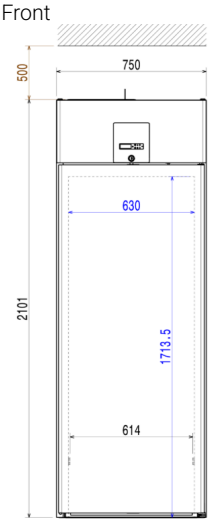

Side

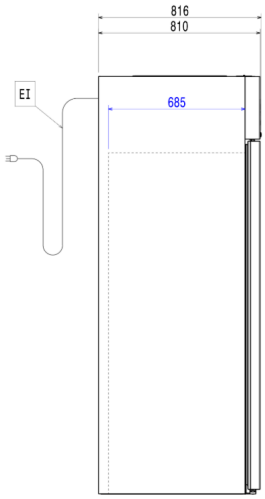

Top



EI = Electrical inlet (power)
RO = Refrigerant Outlet
RI = Refrigerant Inlet