Granular Ice, 655kg/24h, 340kg bin, air-cooled

R290

730293 (IGF655M340SNP)
Ice maker, granular ice, 655 kg/24h, modular, 340kg stainless steel collection bin, air-cooled

Main Features

- Compliant to CE requirements for safety.
- Food grade ABS interior.
- Fully automatic in operation.
- Suitable for gravity drain only.
- Water consumption and productivity calculated using 15°C water temperature and 21°C ambient temperature.
- Bin included.
- The ice-making method (crushing system) guarantees compact, hygienically pure crushed ice that is resistant to melting.
- The ice making method guarantees a continuous and reliable production.
- Easy cleanability guaranteed by an automatic system: the cleaning switch activate the circulation and the rinse of water; at the end of the cycle just swithed again to start producing ice.
- Rounded internal corners of the bin assure ease of cleaning.

Construction

- Easy access to the main components for maintenance.
- Plug as standard (schuko type).
- AISI 304 stainless steel exterior.
- Internal ice containers in ABS.
- Reliability guaranteed by the quality of the construction materials used (front, top and sides in 304 AISI stainless steel) and the sophisticated product and process technology involved.
- AISI 316 evaporator ensures a safe contact with ice.
- Supplied with flexible water supply, drain hoses and scoop.

Sustainability

- Reduced energy consumption by fully insulated storage bin.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Recommended Detergents

PNC Code	Description
0S2881	S01 STAINLESS STEEL SURFACE POLISHER; 6 BOTTLES X 750ML C/T
0S2883	S03 ALCOHOL BASE DETERGENT; 6 BOTTLES X 750ML; ADR&IMDG&IATA Limited Quantity
0S2884	S04 GLASSES & HARD SURFACES CLEANERS; 6 BOTTLES X 750ML
0S3257	S05 - MULTIPURPOSE DEGREASER; 6PCS X 750ML; ADR&IMDG Limited Quantity

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Technical specifications

Electric	
Supply voltage:	200-240 V/1N ph/50 Hz
Water:	
Water outlet size:	25mm
Capacity:	
Bin capacity:	340 kg
Key Information:	
External dimensions, Width:	762 mm
External dimensions, Depth:	819 mm
External dimensions, Height:	1972 mm
Net weight:	52 kg
Output:	655 kg/day
Sustainability	
Refrigerant type:	R290
Refrigerant weight:	140 g
Water consumption:	27.3 lt/hr

Front

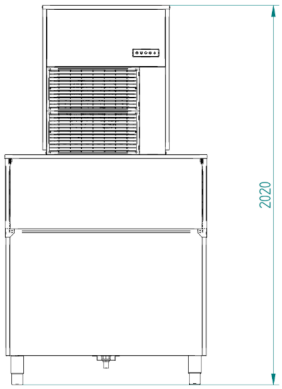

Side

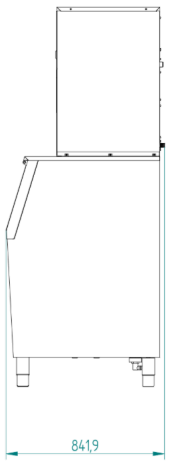

Other



CWI1 = Cold Water inlet 1 (cleaning)
D = Drain
EI = Electrical inlet (power)

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.