



**391098 (E9CSPDC000)**

Electric Chip Scuttle Top with 1 well

## Main Features

- All major compartments located in front of unit for ease of maintenance.
- Easy-to-use control panel.
- The appliance is used to keep servings warm until ready to be served to customer.
- The special design of the control knob system guarantees against water infiltration.
- Unit supplied with a perforated GN 1/1 false bottom specially shaped for easier food collection.
- Unit to have infrared heating elements positioned on the back of the unit to increase holding time.
- Well able to contain 1/1 GN container with a maximum height of 150 mm.
- Typically used in combination with a fryer to allow fried portions to drip excess oil into the well basin.
- One-piece pressed working top in 2mm stainless steel with Scotch Brite finish to facilitate cleaning.
- Suitable for countertop installation.

## Construction

- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- IPX5 water resistance certification.
- All exterior panels in Stainless Steel with Scotch Brite finishing.



## Optional Accessories

PNC Code	Description
<b>Bridge supports</b>	
206137	Support for bridge type installation, 800mm
206138	Support for bridge type installation, 1000mm
206139	Support for bridge type installation, 1200mm
206140	Support for bridge type installation, 1400mm
206141	Support for bridge type installation, 1600mm
206154	Support for bridge type installation, 400mm
<b>Chimney upstands</b>	
206303	Chimney upstand, 400mm
<b>Feet, wheels and ramps</b>	
206135	Kit 4 wheels - 2 swivelling with brake - it is mandatory to install Base support and wheels
<b>Handrails</b>	
206308	Back handrail 800 mm
206309	Back handrail 1200 mm
216044	Side handrail-right/left hand (900XP)
216046	Frontal handrail, 400mm
216047	Frontal handrail, 800mm
216049	Frontal handrail, 1200mm
216050	Frontal handrail, 1600mm
216185	Large handrail - portioning shelf, 400mm
216186	Large handrail - portioning shelf, 800mm
<b>Installation solutions</b>	
206086	Junction sealing kit
<b>Panels</b>	
216278	2 side covering panels for top appliances




# Technical specifications


## Electric

Supply voltage:	220-230 V/1 ph/50-60 Hz
Electrical power max.:	1 kW
Total Watts:	1 kW
Predisposed for:	
<b>Key Information:</b>	
Usable well dimensions (width):	306 mm
Usable well dimensions (height):	156 mm
Usable well dimensions (depth):	510 mm
External dimensions, Width:	400 mm
External dimensions, Depth:	930 mm
External dimensions, Height:	250 mm
Net weight:	28 kg
Shipping weight:	32 kg
Shipping height:	640 mm
Shipping width:	480 mm
Shipping depth:	1020 mm
Shipping volume:	0.31 m <sup>3</sup>
Certification group:	ECS9


Front



Side

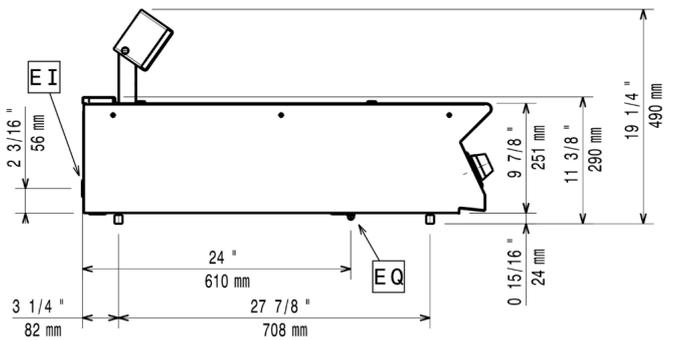

Top

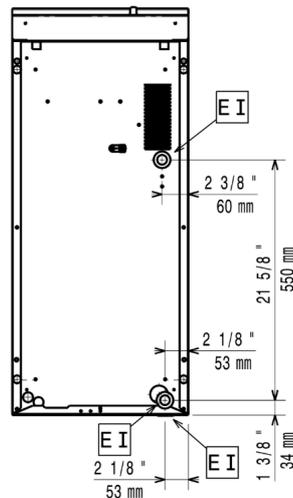

EI = Electrical inlet (power)



Find out more:  
[ISO Certificates](#)  
[Electrolux Professional Recognitions](#)

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

24/02/2026