

602400 (E3HDEIOS)
Plug-in invisible Induction Holding Plate, squared, spacer included, mono zone, 650W

Main Features

- Automatic pan detection to transfer power only when pan is present.
- Self-diagnostics: an error code is displayed (Exxx) in case of dysfunction.
- Perfectly suited for holding food, providing efficient and consistent warming.
- Patented solution.
- Mandatory silicone spacer to protect the surface while guaranteeing the induction technology efficiency.
- Discreet installation under your worktop (maximum 20mm thick), easily switching from a warming spot to a neutral surface.
- Compatible with a wide range of materials (except metals), including marble, wood, granite, dekton, quartz and much more.
- Remote glass control panel with capacitive touches for intuitive operations and easy cleaning.
- Digital display with LED indicators for enhanced visibility.
- Power level settings from 1 to 20.
- Suitable for pot and pan with bottom diameter from 200 mm to 300mm.

Construction

- IP23 protection index.
- Cord and plug included.
- Induction air filters easy to clean and remove for about weekly cleaning. Dishwasher safe.

Sustainability

- Rapid heat transfer directly to the pan, no heat is dispersed into the environment.
- This model is compliant with Swiss Energy Efficiency Ordinance (730.02).

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Recommended Detergents

PNC Code	Description
0S2881	S01 STAINLESS STEEL SURFACE POLISHER; 6 BOTTLES X 750ML C/T
0S2882	S02 Degreaser. A highly concentrated detergent specifically for cleaning and removing grease from appliances and surfaces. Active up to a maximum of 50°C Complete with spray bottle. Pack of 6x750ml bottles
0S2883	S03 ALCOHOL BASE DETERGENT; 6 BOTTLES X 750ML; ADR&IMDG&IATA Limited Quantity
0S2884	S04 Glasses & Hard Surfaces Cleaner, 6 x 750ml bottles

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Technical specifications


Electric

Supply voltage:	220-240 V/1N ph/50/60 Hz
Total Watts:	0.65 kW
Plug type:	CE-SCHUKO
Minimum Circuit Ampacity (MCA):	16A


Key Information:

External dimensions, Width:	340 mm
External dimensions, Depth:	340 mm
External dimensions, Height:	167 mm
Net weight:	4.8 kg


Front

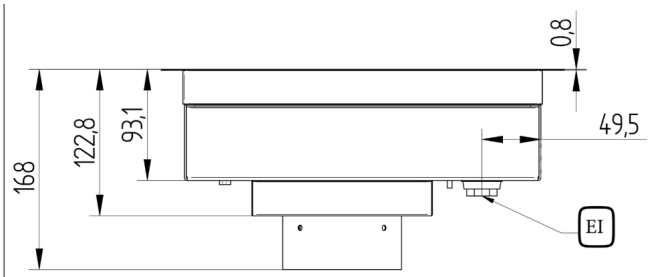

Side

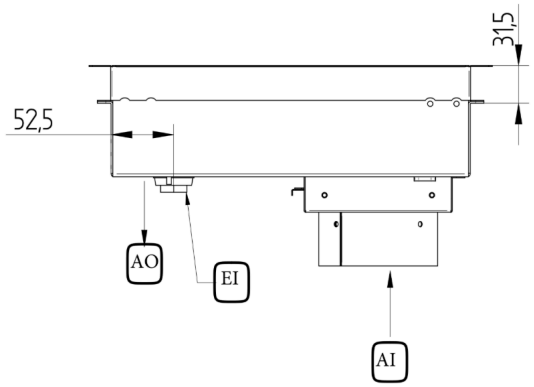

Top

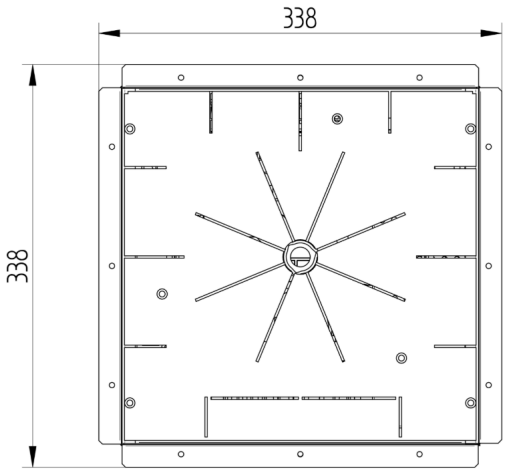

EI = Electrical inlet (power)
EO = Electrical Outlet

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.