Flexy Compact

# Bain-marie, one well (3GN) with wheels H=750mm, overshelf with LED lights

**322049 (F01H3KW02S)**

Bain-marie on cupboard, one well (3 GN container capacity) with wheels, overshelf with LED lights and two stainless steel tray sliders, H=750mm (Nordic)

## Main Features

- Electronic overheating protection.
- Perfect compact design makes it ideal for space saving environments.
- CB and CE certifed by a third party notified body.
- Soft closing doors on operator side.
- Underneath ambient cupboard with doors ideal for extra storage.
- Available options with online configurator: colors, tray sliders, overshelves, feet/wheels with desired diameter, height 750mm for kids.
- Overshelf equipped with LED lights.
- Optional plinth can be installed to cover the feet or the wheels.
- AISI 304 Tray slider in flush mounted stainless steel is installed on long sides and they can also be folded down to facilitate passage of the units through doorways.
- Ideal for servery lines without an operator.
- Unit mounted on 125 mm wheels 2 swivel and 2 with brakes.
- Stylish A type overshelf designed for extra increased visibility on the surface for charming food display.
- Curved glass.
- Designed to serve the food in gastronorm containers.
- Suitable for GN 1/1 containers with a maximum height of 200 mm.
- Precise temperature control and setting at 0,1°C .
- As standard the product comes with digitally controlled thermostat which is in line of HACCP norms and provides visual alarm as a warning of the increasing or decreasing temperatures.
- Designed to work with both hot and cold inlet water.
- It is possible to transform one of the GNs to soup dispenser with the available accessory.
- Food introduced at the correct temperature maintains its core temperature according to Afnor Standards.
- Available dimensions: 2, 3, 4 GN.
- Automatic refill is available as an option.
- Thanks to the sleek, minimalist glass structure, food and dust does not get trapped and the cleaning is made easier.



The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

## Construction

- Heating elements connected to the well bottom include safety thermostat.
- Well bottom is inclined to facilitate water drainage.
- IPx4 water protection.
- Overshelf in complete AISI 304.
- Top in AISI 304.
- Sturdy construction with laminated panelings on 4 sides.
- Well in 304 AISI stainless steel with rounded corners to facilitate cleaning operations. The well is also equipped with a drain hole.
- Electronic control with temperature display.

## Sustainability

- Etched foil heating elements to maximize heat transmission for reduced warm-up times.
- 19mm thick rock wool isolated with galvanize sheet guarantees excellent well insulation to reduce energy dispersion.

## Optional Accessories

| PNC Code | Description |
|---|---|
| **Feet, wheels and ramps** | |
| 800002 | Kit 4 height adjustable flanged feet, Marine |
| **Kicking strips** | |
| 800006 | Kicking strip for 3 GN units (not for Bain-Marie with separated wells) |

## Recommended Detergents

| PNC Code | Description |
|---|---|
| 0S2881 | S01 STAINLESS STEEL SURFACE POLISHER; 6 BOTTLES X 750ML C/T |
| 0S2883 | S03 ALCOHOL BASE DETERGENT; 6 BOTTLES X 750ML; ADR&IMDG&IATA Limited Quantity |
| 0S2884 | S04 GLASSES & HARD SURFACES CLEANERS; 6 BOTTLES X 750ML |
| 0S3257 | S05 - MULTIPURPOSE DEGREASER; 6PCS X 750ML; ADR&IMDG Limited Quantity |


The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

# Technical specifications

| Electric | |
|---|---|
| **Supply voltage:** | 220-240 V/1N ph/50/60 Hz |
| **Electrical power max.:** | 2.04 kW |
| **Water:** | |
| **Water drain outlet size:** | 3/4" |
| **Key Information:** | |
| **N° of doors:** | 2 |
| **External dimensions, Width:** | 1100 mm |
| **External dimensions, Depth:** | 1180 mm |
| **External dimensions, Height:** | 1154 mm |
| **Net weight:** | 112.5 kg |
| **Shipping height:** | 1184 mm |
| **Shipping width:** | 899 mm |
| **Shipping depth:** | 1140 mm |
| **Shipping volume:** | 1.21 m³ |
| **Set temperature:** | +85 / +95 °C |
| **Sustainability** | |
| **Noise level:** | 45 dBA |

Front

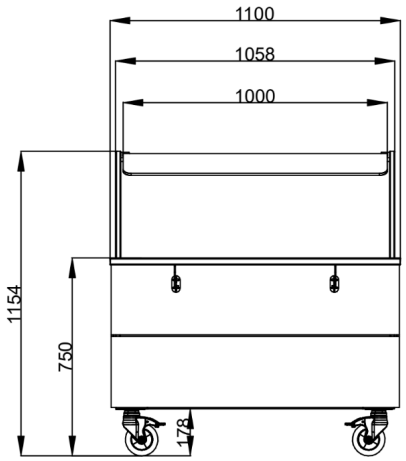


Side

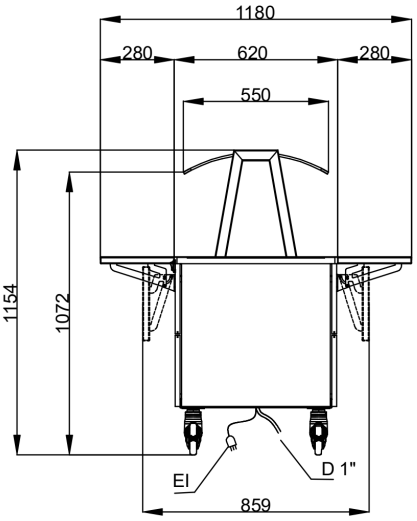


Top

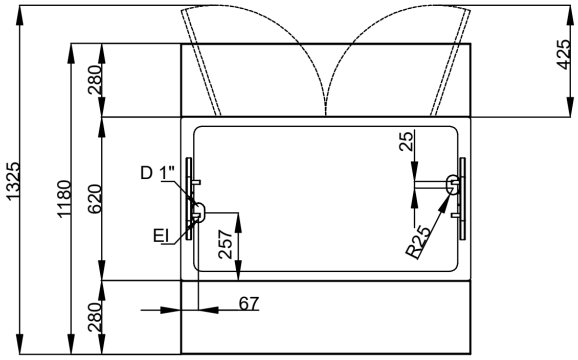


D = Drain

EI = Electrical inlet (power)




The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.