Flexy Compact

# Refrigerated well on cupboard, static (3GN) overshelf with LED lights, H=900mm

**322091 (F10C3AF01W)**

Refrigerated well on cupboard, static (3 GN container capacity)with overshelf with LED lights and one stainless steel tubolar tray slider on customer side H=900mm

## Main Features

- Perfect compact design makes it ideal for space saving environments.
- CB and CE certifed by a third party notified body.
- Tray slider in tubular stainless steel is installed on the customer side and it can also be folded down to facilitate passage of the units through doorways.
- Ideal for servery lines with an operator.
- Unit mounted on 150 mm high feet.
- Soft closing doors on operator side.
- Underneath ambient cupboard with doors ideal for extra storage.
- Available options with online configurator: colors, tray sliders, overshelves, feet/wheels with desired diameter, height 750mm for kids.
- Stylish L type overshelf designed for extra increased visibility on the surface for charming food display.
- Overshelf equipped with LED lights.
- Optional plinth can be installed to cover the feet or the wheels.
- Designed to serve the food in gastronorm containers.
- Suitable for GN 1/1 containers with a maximum height of 200 mm.
- Precise temperature control and setting at 0,1°C .
- As standard the product comes with digitally controlled thermostat which is in line of HACCP norms and provides visual alarm as a warning of the increasing or decreasing temperatures.
- Food introduced at the correct temperature maintains its core temperature according to Afnor Standards.
- Automatic defrosting guarantees evaporators clearance and efficient well cooling.
- Available dimensions: 2, 3, 4 GN.
- Thanks to the sleek, minimalist glass structure, food and dust does not get trapped and the cleaning is made easier.

## Construction

- Well bottom is inclined to facilitate water drainage.
- Overshelf in complete AISI 304.
- Top in AISI 304.
- Sturdy construction with laminated panelings on 4 sides.
- Well in 304 AISI stainless steel with rounded corners to facilitate cleaning operations. The well is also equipped with a drain hole.
- Electronic control with temperature display.
- IPx2 water protection.
- The bottom is equipped with copper tubes to ensure proper cooling, with this system the air touches the cold surface and gets cooled.



The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

## Sustainability

- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- High-density expanded polyurethane foam with cyclopenthane guarantees excellent well insulation to reduce energy dispersion.

## Optional Accessories

| PNC Code | Description |
|---|---|
| **Feet, wheels and ramps** | |
| 800002 | Kit 4 height adjustable flanged feet, Marine |
| **Kicking strips** | |
| 800006 | Kicking strip for 3 GN units (not for Bain-Marie with separated wells) |

## Recommended Detergents

| PNC Code | Description |
|---|---|
| 0S2881 | S01 STAINLESS STEEL SURFACE POLISHER; 6 BOTTLES X 750ML C/T |
| 0S2883 | S03 ALCOHOL BASE DETERGENT; 6 BOTTLES X 750ML; ADR&IMDG&IATA Limited Quantity |
| 0S2884 | S04 Glasses & Hard Surfaces Cleaner, 6 x 750ml bottles |
| 0S3257 | S05 - MULTIPURPOSE DEGREASER; 6PCS X 750ML; ADR&IMDG Limited Quantity |


The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

# Technical specifications

| | |
|---|---|
| **Electric** | |
| **Supply voltage:** | 220-240 V/1N ph/50 Hz |
| **Water:** | |
| **Drain line size:** | 3/4" |
| **Key Information:** | |
| **N° of doors:** | 1 |
| **External dimensions, Width:** | 1100 mm |
| **External dimensions, Depth:** | 915 mm |
| **External dimensions, Height:** | 1304 mm |
| **Net weight:** | 131 kg |
| **Shipping height:** | 1330 mm |
| **Shipping width:** | 730 mm |
| **Shipping depth:** | 1140 mm |
| **Shipping volume:** | 1.11 m³ |
| **Set temperature:** | -15 / 0 °C |
| **Top temperature:** | -15 / 0 °C |
| **Sustainability** | |
| **Noise level:** | 60 dBA |

Front

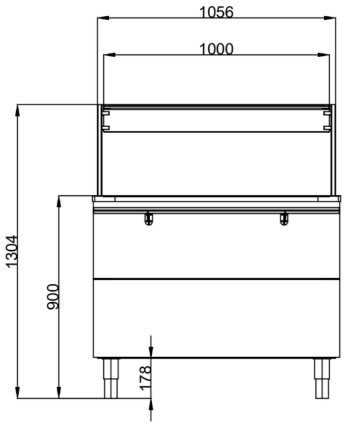


Side

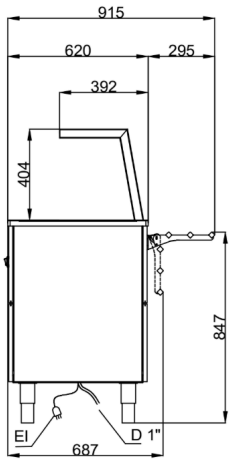


Top

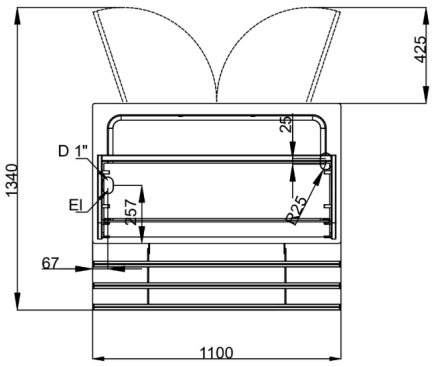


D = Drain

EI = Electrical inlet (power)




The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.