700XP Freestanding Gas Boiling Pan 60lt indirect heat

371269 (E7BSGHINF0)
60-lt indirect gas Boiling Pan with pressure switch

Main Features

- Discharge tube and tap are very easy to clean from outside.
- Ergonomic: the depth of the vessel facilitates stirring the food, also the most delicate food.
- External valve allows to manually evacuate excess air accumulated in the jacket during heating phase.
- Kettle is suitable to cook, sauté or poach all kinds of produce.
- Large capacity food tap enables safe and effortless discharging of contents.
- No overshooting of cooking temperatures, fast reaction.
- Produce is uniformly heated in the base and side walls of the kettle by an indirect heating system that uses integrally generated saturated steam at a temperature of 110° C in the jacket.
- Safety valve avoids overpressure of the steam in the jacket.
- Smooth large surfaces, easy access for cleaning.
- Solenoid valve to refill with hot and cold water.
- Unit to have stainless steel feet with height adjustment up to 50 mm.
- Sides of vessel with satin finishing for easy cleaning.
- Minimum load for correct funtioning is 20 liters.

Construction

- One piece pressed 1.5 mm work top in Stainless steel.
- Robust burners in stainless steel with flame failure device, protected pilot light and optimized combustion.
- IPx4 water protection.
- The tanks are welded in two parts, the side band is in AISI 304, bottom is in ASI 316L, lids are in AISI 304.

Sustainability

- Closed heating system – no waste of energy.
- Firmly fitting cover to reduce cooking time and save energy costs.
- Pressure switch control monitors energy and water consumption.

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Optional Accessories

PNC Code	Description
Baskets	
921626	1-section noodle basket for 60lt boiling pans
Chimney upstands	
206132	Draught diverter, 150 mm diameter
206133	Matching ring for flue condenser, 150 mm diameter
206246	Flue condenser for 1 module, 150 mm diameter
206304	Chimney upstand, 800mm
206310	Flue condenser for 1/2 module, 120 mm diameter
Feet, wheels and ramps	
206135	Kit 4 wheels - 2 swivelling with brake - it is mandatory to install Base support and wheels
206136	Flanged feet kit
206210	Kit 4 feet for concrete installation (not for 900 line free standing grill)
206366	Base support for feet or wheels - 400mm (700/900)
206367	Base support for feet or wheels - 800mm (700/900)
206368	Base support for feet or wheels - 1200mm (700/900)
206369	Base support for feet or wheels - 1600mm (700/900)
206370	Base support for feet or wheels - 2000mm (700/900)
Gas nozzles	
206463	Kit G.25.3 (NI) gas nozzles for 900 boiling pans
Handrails	
206307	Right and left side handrails
206308	Back handrail 800 mm
216047	Frontal handrail, 800mm
216049	Frontal handrail, 1200mm
216186	Large handrail - portioning shelf, 800mm
Installation solutions	
206086	Junction sealing kit

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

PNC Code	Description
Kicking strips	
206147	Frontal kicking strip for concrete installation, 400mm
206148	Frontal kicking strip for concrete installation, 800mm
206150	Frontal kicking strip for concrete installation, 1000mm
206151	Frontal kicking strip for concrete installation, 1200mm
206152	Frontal kicking strip for concrete installation, 1600mm
206176	Frontal kicking strip, 800mm (not for refr-freezer base)
206177	Frontal kicking strip, 1000mm (not for refr-freezer base)
206178	Frontal kicking strip, 1200mm (not for refr-freezer base)
206179	Frontal kicking strip, 1600mm (not for refr-freezer base)
206249	Pair of side kicking strips
206265	Pair of side kicking strips for concrete installation
Measuring rods	
927000	Measuring rod for 60 l Boiling Pan
Other accessories	
927225	Pressure regulator for gas units
Panels	
206374	Rear paneling - 800mm (700/900)
206375	Rear paneling - 1000mm (700/900)
206376	Rear paneling - 1200mm (700/900)
216000	2 side covering panels for free standing appliances
Trolleys	
922403	Trolley with lifting & removable tank

Recommended Detergents

PNC Code	Description
0S2292	C41 HI-TEMP RAPID DEGREASER, 1 pack of six 1 lt bottles (trigger incl.)
0S2881	S01 STAINLESS STEEL SURFACE POLISHER; 6 BOTTLES X 750ML C/T
0S2882	S02 Degreaser. A highly concentrated detergent specifically for cleaning and removing grease from appliances and surfaces. Active up to a maximum of 50°C Complete with spray bottle. Pack of 6x750ml bottles
0S2883	S03 ALCOHOL BASE DETERGENT; 6 BOTTLES X 750ML; ADR&IMDG&IATA Limited Quantity
0S2884	S04 Glasses & Hard Surfaces Cleaner, 6 x 750ml bottles
0S3257	S05 - MULTIPURPOSE DEGREASER; 6PCS X 750ML; ADR&IMDG Limited Quantity

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Technical specifications

Electric	
Supply voltage:	230 V/1N ph/50 Hz
Total Watts:	0.1 kW
Gas	
Gas Power:	14 kW
Standard gas delivery:	Natural Gas G20 (20mbar)
Gas Type Option:	LPG
Gas Inlet:	1/2"
Water:	
Water drain outlet size:	1"1/2
Key Information:	
Pan useful capacity:	60 liter
Vessel (round) diameter:	420 mm
Net weight:	100 kg
Shipping weight (gross):	100 kg
Shipping height:	1140 mm
Shipping width:	820 mm
Shipping depth:	860 mm
Shipping volume:	0.8 m³
Certification group:	N7PG

Front



Side

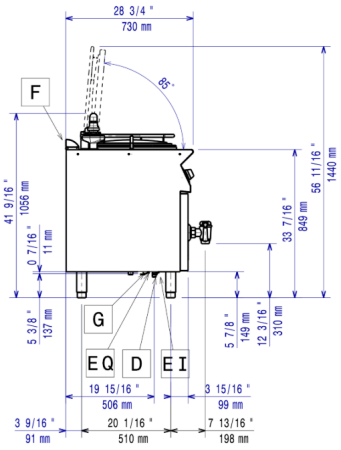

Top

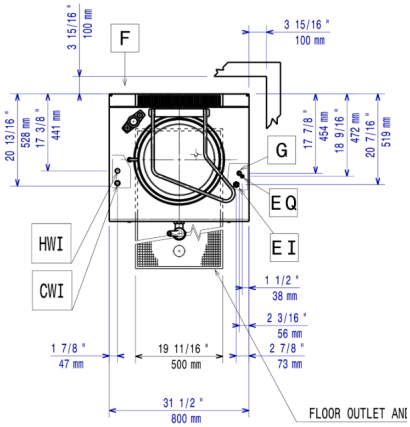

CWI1 = Cold Water inlet 1 (cleaning)
D = Drain
G = Gas connection
EI = Electrical inlet (power)
HWI = Hot water inlet

CE