# 900XP Gas Bratt Pan 80lt with Duplex bottom

**391423 (E9PPBSBAME)**

80-lt gas tilting Braising Pan with Duomat cooking surface, thermostatic control (AGA + Watermark) - Aus

## Main Features

- Actual cooking temperature setting through adjustable thermostat.
- Manual tilting mechanism to facilitate pan emptying.
- Smooth large surfaces, easy access for cleaning.
- The special design of the control knob system guarantees against water infiltration.
- Double-skin well and lid to reduce heat dispersion.
- Lid is double-lined, insulated in 20/10 Stainless steel.
- Energy input controlled by energy regulator.
- Bratt pan ideal for sautéing, poaching, steaming, boiling, stewing and damp cooking.
- Duomat cooking surface allows to perform wet and dry cooking alternatively.
- Working temperature can be set from 80 °C to 300 °C.

## Construction

- All pan internal surfaces round and polished for better hygiene.
- Burners in chrome plated steel with flame failure device, optimized combustion and piezo ignition with electronic flame control.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- IPX5 water resistance certification.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- Cooking surface with [i][b]Duomat[/b][/i] bottom: a 10 mm-thick alloy obtained from the combination of 2 different stainless steels for better thermal stability and corrosion resistance.
- Burners in AISI 441 against corrosion and thanks to a high strenght yield, are resistant to high temperature.
- Usable capacity of the well 66 liters.

## Sustainability

- Heat-insulated: limited heat radiation and low energy consumption.



The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

## Optional Accessories

| PNC Code | Description |
|---|---|
| **Chimney upstands** | |
| 206132 | Draught diverter, 150 mm diameter |
| 206133 | Matching ring for flue condenser, 150 mm diameter |
| 206246 | Flue condenser for 1 module, 150 mm diameter |
| 206304 | Chimney upstand, 800mm |
| 206400 | Chimney grid net, 400mm (700XP/900) |
| **Feet, wheels and ramps** | |
| 206136 | Flanged feet kit |
| 206210 | Kit 4 feet for concrete installation (not for 900 line free standing grill) |
| **Gas nozzles** | |
| 206465 | Kit G.25.3 (NI) gas nozzles for 700 and 900 pasta cookers |
| **Kicking strips** | |
| 206148 | Frontal kicking strip for concrete installation, 800mm |
| 206150 | Frontal kicking strip for concrete installation, 1000mm |
| 206151 | Frontal kicking strip for concrete installation, 1200mm |
| 206152 | Frontal kicking strip for concrete installation, 1600mm |
| 206157 | Pair of side kicking strips for concrete installation |
| 206176 | Frontal kicking strip, 800mm (not for refr-freezer base) |
| 206177 | Frontal kicking strip, 1000mm (not for refr-freezer base) |
| 206178 | Frontal kicking strip, 1200mm (not for refr-freezer base) |
| 206179 | Frontal kicking strip, 1600mm (not for refr-freezer base) |
| 206180 | Pair of side kicking strips (not for refr-freezer base) |
| **Other accessories** | |
| 927225 | Pressure regulator for gas units |
| **Panels** | |
| 206181 | 2 panels for service duct for single installation |
| 206202 | 2 panels for service duct for back to back installation |
| 206374 | Rear paneling - 800mm (700/900) |
| 206375 | Rear paneling - 1000mm (700/900) |
| 206376 | Rear paneling - 1200mm (700/900) |
| **Trolleys** | |
| 922403 | Trolley with lifting & removable tank |


The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

## Recommended Detergents

| PNC Code | Description |
|---|---|
| 0S2292 | C41 HI-TEMP RAPID DEGREASER, 1 pack of six 1 lt bottles (trigger incl.) |
| 0S2881 | S01 STAINLESS STEEL SURFACE POLISHER; 6 BOTTLES X 750ML C/T |
| 0S2882 | S02 Degreaser.  A highly concentrated detergent specifically for cleaning and removing grease from appliances and surfaces. Active up to a maximum of 50°C Complete with spray bottle. Pack of 6x750ml bottles |
| 0S2883 | S03 ALCOHOL BASE DETERGENT; 6 BOTTLES X 750ML; ADR&IMDG&IATA Limited Quantity |
| 0S2884 | S04 Glasses & Hard Surfaces Cleaner, 6 x 750ml bottles |
| 0S3257 | S05 - MULTIPURPOSE DEGREASER; 6PCS X 750ML; ADR&IMDG Limited Quantity |



The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

# Technical specifications

**Electric**

| | |
|---|---|
| **Supply voltage:** | 220-230 V/1 ph/50 Hz |
| **Total Watts:** | 0.1 kW |
| **Predisposed for:** | 220-230V 1~ 50Hz 0.1kW |

**Gas**

| | |
|---|---|
| **Gas Power:** | 21 kW |
| **Standard gas delivery:** | Natural Gas |
| **Gas Type Option:** | LPG;Natural Gas |
| **Gas Inlet:** | 1/2" |

**Key Information:**

| | |
|---|---|
| **Cooking Surface Depth:** | 565 mm |
| **Cooking Surface Width:** | 680 mm |
| **Cooking Well Height:** | 180 mm |
| **Well Capacity, Max:** | 80 lt |
| **Working Temperature MIN:** | 80 °C |
| **Working Temperature MAX:** | 300 °C |
| **Net weight:** | 150 kg |
| **Shipping weight (gross):** | 160 kg |
| **Shipping height:** | 1360 mm |
| **Shipping width:** | 1020 mm |
| **Shipping depth:** | 860 mm |
| **Shipping volume:** | 1.19 m³ |

Front




Side




Top




CW11 = Cold Water inlet 1 (cleaning)

G = Gas connection

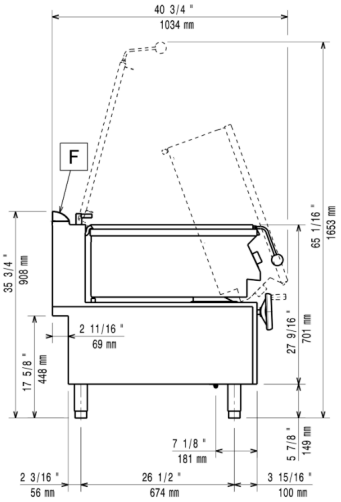EI = Electrical inlet (power)

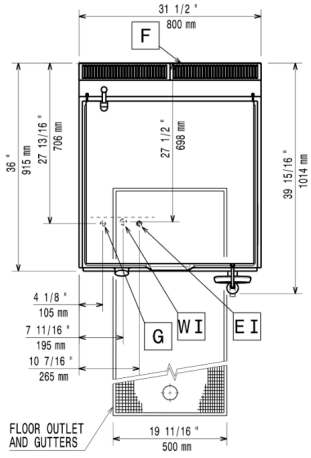


The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.