900XP Two Wells Gas Fryer 23 liter

391633 (E9KKGTBAMEI)
23+23-lt gas Fryer with 2 "V" shaped wells (external burners), 4 half size baskets and lids included, Q Mark

Main Features

- All major compartments located in front of unit for ease of maintenance.
- Deep drawn V-Shaped wells.
- Flame failure device on each burner.
- Overheat protection thermostat as standard on all units.
- Piezo spark ignition for added safety.
- The special design of the control knob system guarantees against water infiltration.
- Thermostatic regulation of oil temperature up to a maximum of 190 °C.
- Supplied as standard with 4 half size baskets and 1 right and left side doors for cupboard.
- High efficiency 42 kW burners in stainless steel with flame failure device attached to the outside of the well.
- Optional portable oil quality monitoring tool (code 9B8081) for efficient oil management.

Construction

- Interior of well with rounded corners for ease of cleaning.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- Unit is 930 mm deep to give a larger working surface area.
- Unit delivered with four 50 mm legs in stainless steel as standard.
- Q Mark model delivered with nozzles for G30-50 mbar.

Included Accessories

PNC Code	Description	Quantity
206350	Door for open base cupboard	2
927223	2 half size baskets for 15lt OptiOil and 18/23lt fryers	2

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Optional Accessories

PNC Code	Description
Bases & base accessories	
206350	Door for open base cupboard
Baskets	
927223	2 half size baskets for 15lt OptiOil and 18/23lt fryers
927226	1 full size basket for 15lt OptiOil and 18/23lt fryers
Bridge supports	
206140	Support for bridge type installation, 1400mm
Chimney upstands	
206132	Draught diverter, 150 mm diameter
206133	Matching ring for flue condenser, 150 mm diameter
206246	Flue condenser for 1 module, 150 mm diameter
206304	Chimney upstand, 800mm
206400	Chimney grid net, 400mm (700XP/900)
Feet, wheels and ramps	
206135	Kit 4 wheels - 2 swivelling with brake - it is mandatory to install Base support and wheels
206136	Flanged feet kit
206372	Base support for feet or wheels (lateral) for 23lt fryers, pasta cookers and refrigerated bases (900XP)
Gas nozzles	
206467	Kit G.25.3 (NI) gas nozzles for 900 fryers
Grease/oil management	
200086	Stainless steel oil filter for 18/23lt fryers
206209	Extension pipe for oil drainage for fryers
921023	Sediment collection tray for 23lt fryers (to be put in the well)
927227	Unclogging rod for 23lt fryers drainage pipe
960645	Deflector for floured products for 23lt fryers
Installation solutions	
206086	Junction sealing kit
Kicking strips	
206180	Pair of side kicking strips (not for refr-freezer base)
206203	Frontal kicking strip for 23lt fryers in two parts
Lids	
206201	Hygienic lid for 23lt fryers
Other accessories	
927225	Pressure regulator for gas units
Panels	
216134	2 side covering panels for free standing appliances

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Recommended Detergents

PNC Code	Description
0S2292	C41 HI-TEMP RAPID DEGREASER, 1 pack of six 1 lt bottles (trigger incl.)
0S2881	S01 STAINLESS STEEL SURFACE POLISHER; 6 BOTTLES X 750ML C/T
0S2882	S02 Degreaser. A highly concentrated detergent specifically for cleaning and removing grease from appliances and surfaces. Active up to a maximum of 50°C Complete with spray bottle. Pack of 6x750ml bottles
0S2883	S03 ALCOHOL BASE DETERGENT; 6 BOTTLES X 750ML; ADR&IMDG&IATA Limited Quantity
0S2884	S04 Glasses & Hard Surfaces Cleaner, 6 x 750ml bottles
0S3257	S05 - MULTIPURPOSE DEGREASER; 6PCS X 750ML; ADR&IMDG Limited Quantity

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Technical specifications

Gas

Gas Power:	42 kW
Standard gas delivery:	G30 - 50 mbar
Gas Type Option:	G31 37 mbar
Gas Inlet:	1/2"

Key Information:

Usable well dimensions (width):	340 mm
Usable well dimensions (height):	575 mm
Usable well dimensions (depth):	400 mm
Well capacity:	21 lt MIN; 23 lt MAX
Performance*:	56.8 kg\hr
Thermostat Range:	120 °C MIN; 190 °C MAX
Net weight:	115 kg
Shipping weight (gross):	126 kg
Shipping height:	1080 mm
Shipping width:	1020 mm
Shipping depth:	860 mm
Shipping volume:	0.95 m³
***Based on:**	Inspired by ASTM F1361, ensuring max productivity
Certification group:	GF92M23

Front

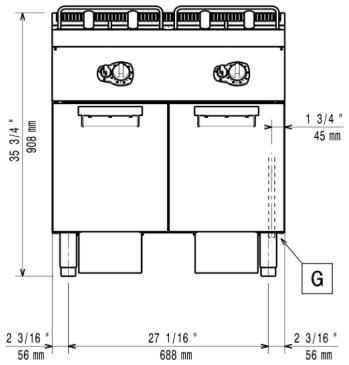

Side

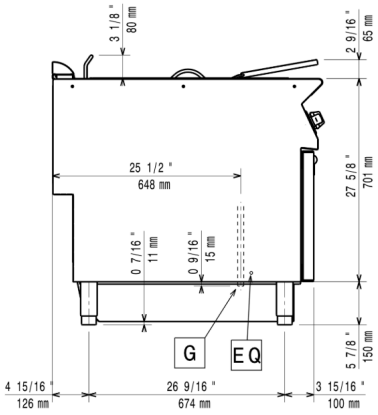

Top

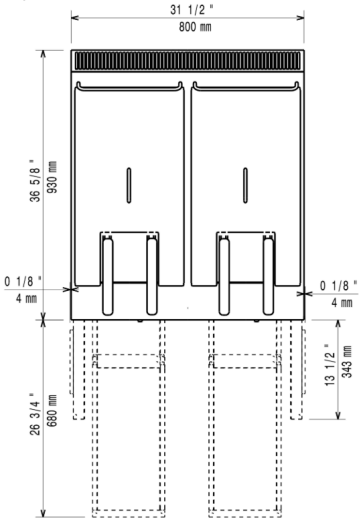

G = Gas connection
EQ = Equipotential screw
DO = Overflow drain pipe

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.