



### 504350 (ETHDEI)

HeroDry freestanding Blower for green&clean Hood Type and Undercounter Dishwasher

## Main Features

---

- Electronically controlled to optimize drying results.
- IPx4 protection against splashing water, solid objects and small animals (larger than 6mm).
- Drying zone removes most of the water from the crockery through a high powered fan that provides a greater air re-circulation flow; ensuring crockery will be at a temperature cool enough to be handled safely.
- The feeding direction can be either left to right or right to left in both straight or corner configuration, customizable on site.
- Supplied with 2 pairs of silicon curtains.
- Preheats by re-using the warm air from the chamber mixed with the environment fresh air and Rewarm function (activated as default) manages the power during standby to maintain the chamber temperature.
- Full accessibility to the interior and hygienic design to facilitate cleaning.
- Wide loading clearance allow to fit both 500x500 baskets for standard warewashing items or dining trays.
- User Interface provide on-off button, eco-cycle selection, start/pose button and a display that show machine status, alerts messages and cycles countdown.
- Accessibility from the front for service purpose.

## Construction

---

- The freestanding unit is built to be placed close to the dishwasher and easily fits any layout, thanks to the on-site straight or corner configuration by easily changing the external panels position.
- Body made in heavy duty anticorrosive 304 type stainless steel.
- Heavy duty components for professional use.



## Optional Accessories

PNC Code	Description
<b>Baskets</b>	
867082	Basket for reusable cups
867083	Protection grid for light items
<b>Installation solutions</b>	
867084	Front/side closure panel




# Technical specifications


## Electric

Supply voltage:	380-415 V/3N ph/50/60 Hz
Default Installed Power:	8.5 kW
<b>Key Information:</b>	
N° of cycles:	2
Duration cycle:*	130 sec.
Cycle, n:	
<b>Sustainability</b>	
Noise level:	<62 dBA


Front

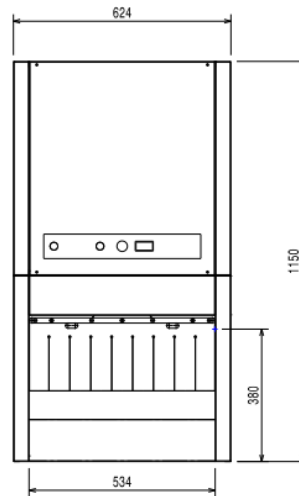

Side

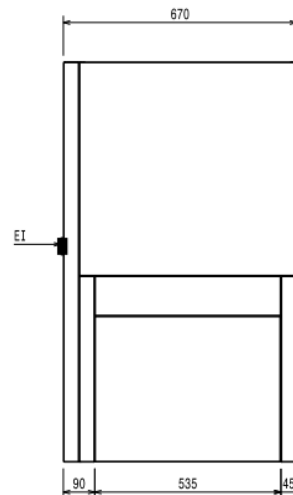

Top

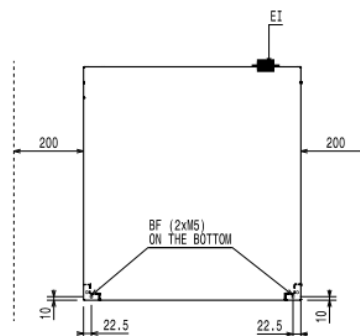

EI = Electrical inlet (power)

XP = Chemical probe/sensor

EO = Electrical Outlet



Find out more:  
ISO Certificates  
Electrolux Professional Recognitions

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2026/04/14

3/3