thermaline 80 - Freestanding Electric Multi Braiser, 1/1GN, 1 Side, Backsplash, H=800

588278 (MAAAFBDDAO)
Electric Multi Braiser, one-side operated with backsplash, 1/1 GN

Main Features

- Large drain hole on cooking surface permits the draining of residual cooking juices into a large collector placed under the cooking surface.
- Multi purpose cooking appliance that can be used to shallow fry, cook liquids or even as a bain marie. Unit can be used for sautéing, poaching, steaming, simmering, stewing, braising, boiling and preparing white sauces.
- Overheat protection: the temperature sensor switches off the supply in case of overheating.
- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Metal-covered knobs with embedded hygienic "soft-touch" grip for easier handling and cleaning. The special design of the controls prevents infiltration of liquids or soil into vital components.
- Large visible digital display manufactured in tempered glass to resist heat and chemicals, showing temperatures or power settings. The display also shows on/off status of the appliance and on/off status of the heating elements.
- Powerblock heating system for optimal temperature distribution.
- Handles are ergonomically designed with silicon "soft" grip for easy handling and cleaning.
- Raised edge all around the well to protect from infiltration of dirt from worktop.
- Temperature can be set up to a maximum of 280 °C.
- Interior dimensions of the well enables the use of GN containers.

Construction

- IPX5 water resistance certification.
- An 18 mm thick stainless steel plated bottom is seamlessly welded into the chrome nickel steel well.
- Rounded corners and edges aid cleaning.
- Storage space in the base of the appliance that can accept GN1/1 containers.
- 2 mm top in 1.4301 (AISI 304).
- Unit constructed according to DIN 18860_2 with 20 mm drop nose top and 70 mm recessed plinth.
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in stainless steel.

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Sustainability

- Standby function for energy saving and fast recovery of maximum power.

Optional Accessories

PNC Code	Description
Bottom plates	
913228	Bottom plate for multibraiser 1/1 GN
Cleaning solutions	
913123	Blades with rounded sides for scraper
Connection and endrail kits	
912497	Connecting rail kit for appliances with backsplash, 800mm
912977	Connecting rail kit for appliances with backsplash: modular 80 (on the left), ProThermetic tilting (on the right), ProThermetic stationary (on the left) to ProThermetic tilting (on the right)
912978	Connecting rail kit for appliances with backsplash: modular 80 (on the right), ProThermetic tilting (on the left), ProThermetic stationary (on the right) to ProThermetic tilting (on the left)
913113	Endrail kit, flush-fitting, with backsplash, left
913114	Endrail kit, flush-fitting, with backsplash, right
913204	Endrail kit (12.5mm) for thermaline 80 units with backsplash, left
913205	Endrail kit (12.5mm) for thermaline 80 units with backsplash, right
913226	U-clamping rail for back-to-back installations with backsplash (to be ordered as S-code)
Filters	
913663	Filter W=400mm
Installation solutions	
913230	Insert profile D=800mm
Kicking strips	
912594	Stainless steel front kicking strip, 400mm width
912622	Stainless steel side kicking strips left and right, against the wall, 800mm width
912625	Stainless steel side kicking strips left and right, back-to-back, 1610mm width
Lids	
910625	Lid for multi braisers, 1/1 GN

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

PNC Code	Description
Panels	
913022	Back panel, 400x800mm, for units with backsplash
913094	Stainless steel panel, 800x800mm, against wall, left side
913098	Stainless steel panel, 800x800mm, flush-fitting, against wall, right side
913264	Side reinforced panel only in combination with side shelf for against the wall installations, left
913266	Side reinforced panel only in combination with side shelf, for against the wall installations, right
913669	Stainless steel dividing panel, 800x800mm, (it should only be used between Electrolux Professional thermaline Modular 80 and thermaline C80)
913685	Stainless steel side panel, 800x800mm, flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermetic appliances and external appliances - provided that these have at least the same dimensions)
Shelves	
912522	Portioning shelf, 400mm width
912552	Portioning shelf, 400mm width
912577	Folding shelf, 300x800mm
912578	Folding shelf, 400x800mm
912583	Fixed side shelf, 200x800mm
912584	Fixed side shelf, 300x800mm
912585	Fixed side shelf, 400x800mm
913233	Perforated shelf for warming cabinets and cupboard bases (one-side operated TL80-85-90 and two-side operated for TL80)
913279	Shelf fixation for TL80-85-90 one-side operated, TL80 two-side operated
Other accessories	
912802	Stainless steel plinth, against wall, 400mm width
913244	Energy optimizer kit 14A - factory fitted
913676	Electric mainswitch 25A 4mm2 NM for modular H800 electric units (factory fitted)

Recommended Detergents

PNC Code	Description
0S2292	C41 HI-TEMP RAPID DEGREASER, 1 pack of six 1 lt bottles (trigger incl.)

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Technical specifications

Electric	
Supply voltage:	400 V/3N ph/50/60 Hz
Total Watts:	5 kW
Key Information:	
Usable well dimensions (width):	306 mm
Usable well dimensions (height):	110 mm
Usable well dimensions (depth):	510 mm
Cooking Well Height:	110 mm
Well Capacity, Max:	11 lt
Working Temperature MIN:	120 °C
Working Temperature MAX:	280 °C
External dimensions, Width:	400 mm
External dimensions, Depth:	800 mm
External dimensions, Height:	800 mm
Storage Cavity Dimensions (width):	340 mm
Storage Cavity Dimensions (height):	330 mm
Storage Cavity Dimensions (depth):	740 mm
Net weight:	70 kg
Configuration:	Rectangular;Fixed;With splashback
Sustainability	
Current consumption:	7.22 Amps

Front

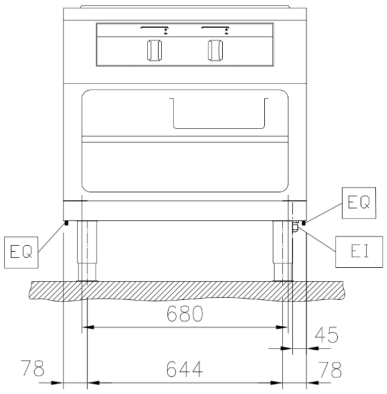

Side

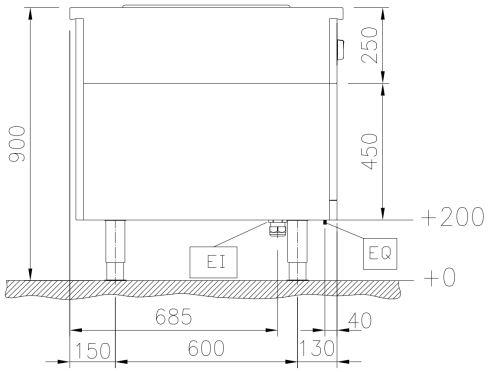

Top

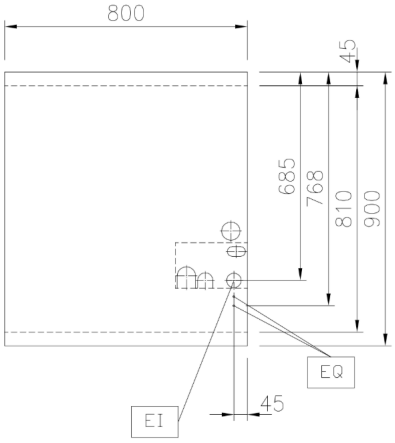

EI = Electrical inlet (power)

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.