Modular Cooking Range Line

thermaline 80 - 600 mm Electric Warming Cabinet with 1 door, GN conform, 1 Side (H2) - H=550

588314 (MA4GDAFOAO)
Electric Warming Cabinet, with 1 door, one-side operated, GN - H2

Main Features

- All major components may be easily accessed from the front.
- Temperature in the cupboard can be set through a thermostat to suit different requirements. The maximum temperature is 110°C.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Unit constructed according to DIN 18860_2 with 70 mm recessed plinth.
- Unit can be installed below modular top appliances, designed to keep plates warm.

Construction

- IPX5 water resistance certification.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Storage space in the base of the appliance accepts GN1/1 containers.
- Internal frame for heavy duty sturdiness in stainless steel.

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Optional Accessories

PNC Code	Description
Kicking strips	
912596	Stainless steel front kicking strip, 600mm width
912619	Stainless steel side kicking strips left and right, freestanding, 800mm width
912622	Stainless steel side kicking strips left and right, against the wall, 800mm width
912625	Stainless steel side kicking strips left and right, back-to-back, 1610mm width
Panels	
912508	Stainless steel side panel, 800x800mm, freestanding
913094	Stainless steel panel, 800x800mm, against wall, left side
913098	Stainless steel panel, 800x800mm, flush-fitting, against wall, right side
913180	Back panel, 600x450mm, for bases one-side operated
913216	Stainless steel side panel, left, h=800
913217	Stainless steel side panel, right, h=800
913257	Side reinforced panel only in combination with side shelf, for freestanding units
913264	Side reinforced panel only in combination with side shelf for against the wall installations, left
913266	Side reinforced panel only in combination with side shelf, for against the wall installations, right
913273	Side reinforced panel only in combination with side shelf, for back-to-back installations, left
913274	Side reinforced panel only in combination with side shelf, for back-to-back installation, right
913669	Stainless steel dividing panel, 800x800mm, (it should only be used between Electrolux Professional thermaline Modular 80 and thermaline C80)
913685	Stainless steel side panel, 800x800mm, flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermetic appliances and external appliances - provided that these have at least the same dimensions)
Shelves	
913233	Perforated shelf for warming cabinets and cupboard bases (one-side operated TL80-85-90 and two-side operated for TL80)
913279	Shelf fixation for TL80-85-90 one-side operated, TL80 two-side operated
Other accessories	
912804	Stainless steel plinth, against wall, 600mm width
912823	Stainless steel plinth, freestanding, 600mm width
913244	Energy optimizer kit 14A - factory fitted
913676	Electric mainswitch 25A 4mm2 NM for modular H800 electric units (factory fitted)

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Technical specifications

Key Information:	
External dimensions, Width:	600 mm
External dimensions, Depth:	800 mm
External dimensions, Height:	550 mm
Cupboard Cavity Dimensions (width):	340 mm
Cupboard Cavity Dimensions (height):	330 mm
Cupboard Cavity Dimensions (depth):	715 mm
Cabinet temperature range:	30-110 °C
Net weight:	24 kg
Sustainability	
Current consumption:	2.5 Amps

Front

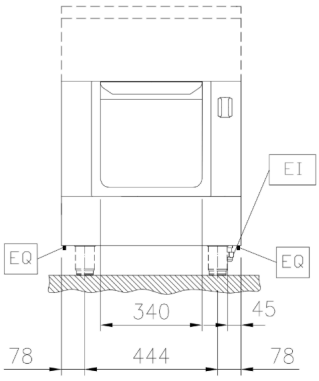

Side

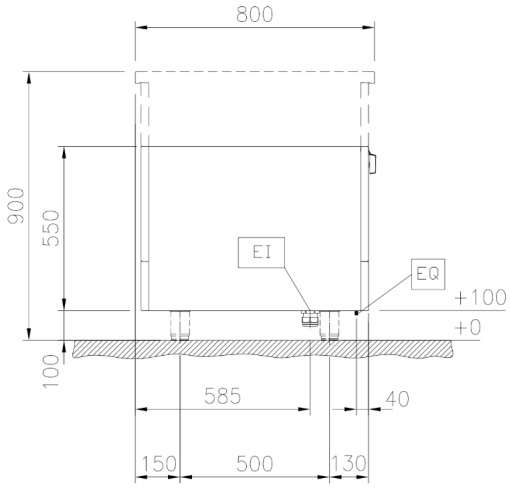

Top

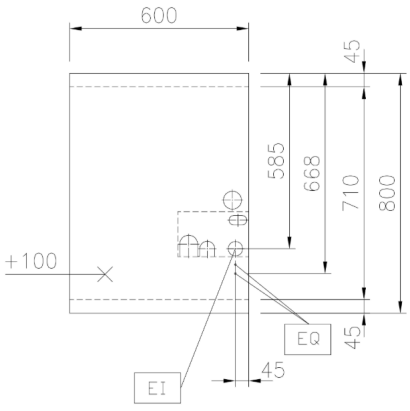

EI = Electrical inlet (power)

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.