Modular Cooking Range Line

# thermaline 80 - Full Module Freestanding Electric Fry Top, 1 Side with Backsplash, H=700

**588365 (MAHBEBHDAO)**
Electric Fry Top with smooth chrome Plate, one-side operated with backsplash

**588369 (MAHDEBHDAO)**
Electric Fry Top with ribbed chrome Plate, one-side operated with backsplash

## Main Features

- Large drain hole on cooking surface permits the draining of residual cooking juices into a large collector placed under the cooking surface.
- Overheat protection: the temperature sensor switches off the supply in case of overheating.
- Stainless steel high splash guards on the rear and sides of cooking surface.
- Units have separate controls for each half module of the cooking surface.
- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Metal-covered knobs with embedded hygienic "soft-touch" grip for easier handling and cleaning. The special design of the controls prevents infiltration of liquids or soil into vital components.
- Large visible digital display manufactured in tempered glass to resist heat and chemicals, showing temperatures or power settings. The display also shows on/off status of the appliance and on/off status of the heating elements.
- Powerblock heating system for optimal temperature distribution.

## Construction

- Cooking surface to be completely smooth or completely ribbed.
- IPX5 water resistance certification.
- 2 mm top in 1.4301 (AISI 304).
- Unit constructed according to DIN 18860_2 with 20 mm drop nose top and 70 mm recessed plinth.
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Cooking surface in chromium-plated mild steel with non-stick finishing for optimum grilling results.
- Internal frame for heavy duty sturdiness in stainless steel.

## Sustainability

- Standby function for energy saving and fast recovery of maximum power.


The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

## Optional Accessories

| PNC Code | Description |
|---|---|
| **Connection and endrail kits** | |
| 912497 | Connecting rail kit for appliances with backsplash, 800mm |
| 912977 | Connecting rail kit for appliances with backsplash: modular 80 (on the left), ProThermetic tilting (on the right), ProThermetic stationary (on the left) to ProThermetic tilting (on the right) |
| 912978 | Connecting rail kit for appliances with backsplash: modular 80 (on the right), ProThermetic tilting (on the left), ProThermetic stationary (on the right) to ProThermetic tilting (on the left) |
| 913113 | Endrail kit, flush-fitting, with backsplash, left |
| 913114 | Endrail kit, flush-fitting, with backsplash, right |
| 913204 | Endrail kit (12.5mm) for thermaline 80 units with backsplash, left |
| 913205 | Endrail kit (12.5mm) for thermaline 80 units with backsplash, right |
| 913226 | U-clamping rail for back-to-back installations with backsplash (to be ordered as S-code) |
| **Filters** | |
| 913665 | Filter W=800mm |
| **Installation solutions** | |
| 913230 | Insert profile D=800mm |
| **Kicking strips** | |
| 912634 | Stainless steel front kicking strip, 800mm width |
| 912658 | Stainless steel side kicking strip left and right, against the wall, 800mm width |
| 912661 | Stainless steel side kicking strip left and right, back-to-back, 1610mm width |
| **Panels** | |
| 913013 | Back panel, 800x700mm, for units with backsplash |
| 913093 | Stainless steel panel, 800x700mm, against wall, left side |
| 913097 | Stainless steel panel, 800x700m, against the wall, right side |
| 913263 | Side reinforced panel only in combination with side shelf, for against the wall installations, left |
| 913265 | Side reinforced panel only in combination with side shelf, for against the wall installations, right |
| 913668 | Stainless steel dividing panel, 800x700mm, (it should only be used between Electrolux Professional thermaline Modular 80 and thermaline C80) |
| 913684 | Stainless steel side panel, 800x700mm, flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermetic appliances and external appliances - provided that these have at least the same dimensions) |


The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

| PNC Code | Description |
|---|---|
| **Shelves** | |
| 912526 | Portioning shelf, 800mm width |
| 912556 | Portioning shelf, 800mm width |
| 912577 | Folding shelf, 300x800mm |
| 912578 | Folding shelf, 400x800mm |
| 912583 | Fixed side shelf, 200x800mm |
| 912584 | Fixed side shelf, 300x800mm |
| 912585 | Fixed side shelf, 400x800mm |
| 913234 | Perforated shelf for warming cabinets and cupboard bases (one-side operated TL80-85-90 and two-side operated for TL80) |
| 913281 | Shelf fixation for TL80-85-90 one-side operated, TL80 two-side operated |
| **Other accessories** | |
| 912844 | Stainless steel plinth, against wall, 800mm width |
| 913246 | Energy optimizer kit 24A - factory fitted |

## Recommended Detergents

| PNC Code | Description |
|---|---|
| 0S2292 | C41 HI-TEMP RAPID DEGREASER, 1 pack of six 1 lt bottles (trigger incl.) |


The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

# Technical specifications

| | 588365 | 588369 |
|---|---|---|
| **Electric** | | |
| Supply voltage: | 400 V/3N ph/ 50/60 Hz | 400 V/3N ph/ 50/60 Hz |
| Total Watts: | 15.3 kW | 15.3 kW |
| **Key Information:** | | |
| Cooking Surface Depth: | 615 mm | 615 mm |
| Cooking Surface Width: | 700 mm | 700 mm |
| Working Temperature MIN: | 80 °C | 80 °C |
| Working Temperature MAX: | 280 °C | 280 °C |
| External dimensions, Width: | 800 mm | 800 mm |
| External dimensions, Depth: | 800 mm | 800 mm |
| External dimensions, Height: | 700 mm | 700 mm |
| Storage Cavity Dimensions (width): | 580 mm | 580 mm |
| Storage Cavity Dimensions (height): | 330 mm | 330 mm |
| Storage Cavity Dimensions (depth): | 740 mm | 740 mm |
| Net weight: | 150 kg | 150 kg |
| Configuration: | On Base;One-Side Operated | On Base;One-Side Operated |
| **Sustainability** | | |
| Current consumption: | 22.1 Amps | 22.1 Amps |

Front

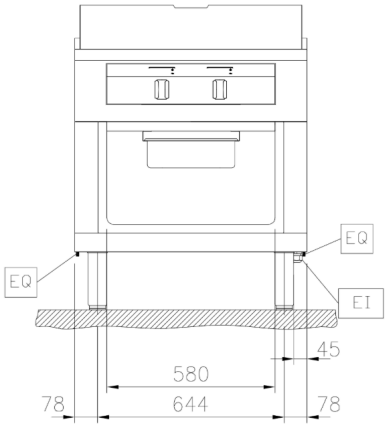


Side

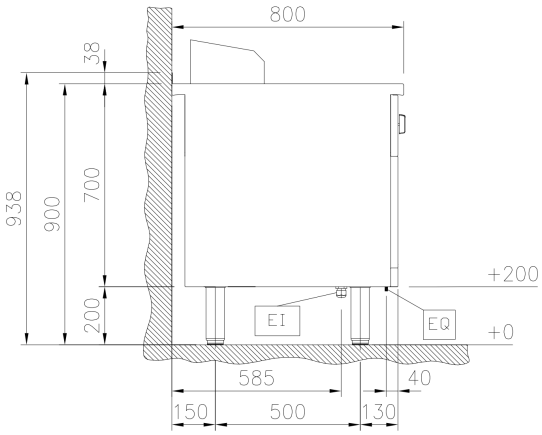


Top




EI = Electrical inlet (power)
EQ = Equipotential screw

Find out more:
ISO Certificates
Electrolux Professional Recognitions

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.