thermaline 85 - 600 mm Electric Warming Cabinet with 1 door, GN conform, 1 Side

588656 (MB4CCAFOAO)
Electric Warming Cabinet with 1 door, one-side operated, GN

Main Features

- All major components may be easily accessed from the front.
- Temperature in the cupboard can be set through a thermostat to suit different requirements. The maximum temperature is 110°C.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Unit constructed according to DIN 18860_2 with 70 mm recessed plinth.
- Unit can be installed below modular top appliances, designed to keep plates warm.

Construction

- IPX5 water resistance certification.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Storage space in the base of the appliance accepts GN1/1 containers.
- Internal frame for heavy duty sturdiness in stainless steel.

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Optional Accessories

PNC Code	Description
Kicking strips	
912632	Stainless steel front kicking strip, 600mm width
912659	Stainless steel side kicking strip left and right, wall mounted, 850mm width
912662	Stainless steel side kicking strip left and right, back-to-back, 1700mm width
Panels	
913003	Stainless steel side panel, 850x700mm, right side, against wall
913004	Stainless steel side panel, 850x700mm, left side, against wall
913261	Side reinforced panel only in combination with side shelf, for against the wall installations, right
913262	Side reinforced panel only in combination with side shelf, for against the wall installations, left
913670	Stainless steel dividing panel, 850x700mm, (it should only be used between Electrolux Professional thermaline Modular 85 and thermaline C85)
913686	Stainless steel side panel, 850x700mm, flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermetic appliances and external appliances - provided that these have at least the same dimensions)
Shelves	
913233	Perforated shelf for warming cabinets and cupboard bases (one-side operated TL80-85-90 and two-side operated for TL80)
913279	Shelf fixation for TL80-85-90 one-side operated, TL80 two-side operated
Other accessories	
913244	Energy optimizer kit 14A - factory fitted

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Technical specifications

Key Information:

External dimensions, Width:	600 mm
External dimensions, Depth:	850 mm
External dimensions, Height:	450 mm
Cupboard Cavity Dimensions (width):	340 mm
Cupboard Cavity Dimensions (height):	330 mm
Cupboard Cavity Dimensions (depth):	715 mm
Cabinet temperature range:	30-110 °C
Net weight:	23 kg

Sustainability

Current consumption:	2.5 Amps

Front

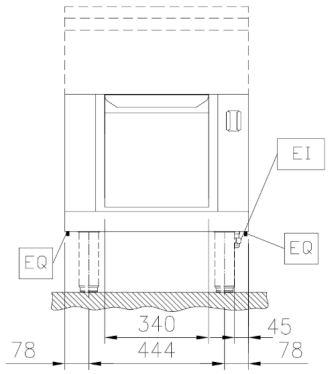

Side

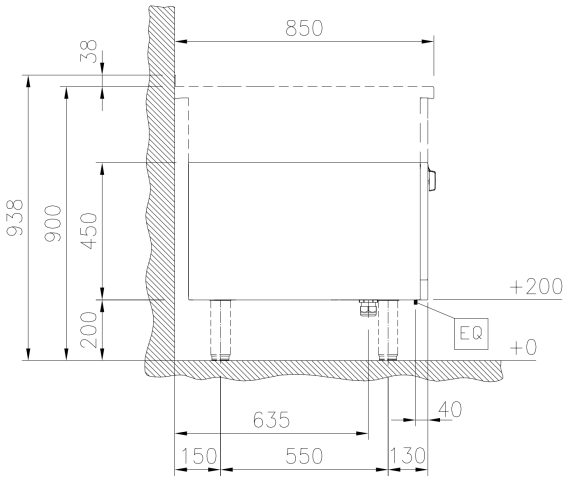

Top

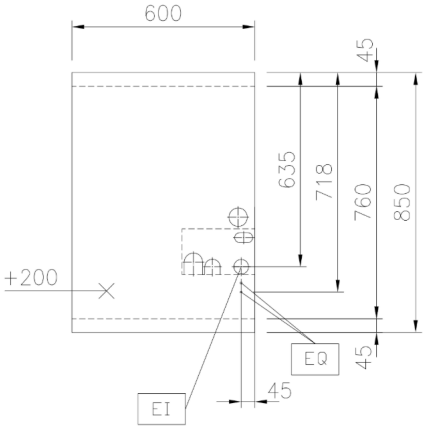

EI = Electrical inlet (power)

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.