Modular Cooking Range Line

# thermaline 90 - 500 mm Electric Warming Cabinet with 1 door, GN conform, 1 Side (H2) - H=550

**589487 (MC4GDAEOAO)**

Electric Warming Cabinet, with 1 door, one-side operated, GN - H2

## Main Features

- All major components may be easily accessed from the front.
- Temperature in the cupboard can be set through a thermostat to suit different requirements. The maximum temperature is 110°C.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Unit constructed according to DIN 18860_2 with 70 mm recessed plinth.
- Unit can be installed below modular top appliances, designed to keep plates warm.

## Construction

- IPX5 water resistance certification.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Storage space in the base of the appliance accepts GN1/1 containers.
- Internal frame for heavy duty sturdiness in stainless steel.



The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

## Optional Accessories

| PNC Code | Description |
|---|---|
| **Kicking strips** | |
| 912595 | Stainless steel front kicking strip, 500mm width |
| 912621 | Stainless steel side kicking strips left and right, freestanding, 900mm width |
| 912624 | Stainless steel side kicking strips left and right, against the wall, 900mm width |
| 912627 | Stainless steel side kicking strips left and right, back-to-back, 1810mm width |
| **Panels** | |
| 912511 | Stainless steel side panel, 900x800mm, freestanding |
| 913102 | Stainless steel panel, 900x800mm, against wall, left side |
| 913106 | Stainless steel panel, 900x800mm, against wall, right side |
| 913179 | Back panel, 500x550mm, for bases one-side operated |
| 913224 | Stainless steel side panel, left, H=800, flush |
| 913225 | Stainless steel side panel, left, H=800, flush |
| 913259 | Side reinforced panel only in combination with side shelf, for freestanding units |
| 913268 | Side reinforced panel only in combination with side shelf, for against the wall installations, left |
| 913270 | Side reinforced panel only in combination with side shelf, for against the wall installations, right |
| 913277 | Side reinforced panel only in combination with side shelf, for back-to-back installations, left |
| 913278 | Side reinforced panel only in combination with side shelf, for back-to-back installation, right |
| 913673 | Stainless steel dividing panel, 900x800mm, (it should only be used between Electrolux Professional thermaline Modular 90 and thermaline C90) |
| 913689 | Stainless steel side panel, 900x800mm, flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermetic appliances and external appliances - provided that these have at least the same dimensions) |
| **Shelves** | |
| 913233 | Perforated shelf for warming cabinets and cupboard bases (one-side operated TL80-85-90 and two-side operated for TL80) |
| 913279 | Shelf fixation for TL80-85-90 one-side operated, TL80 two-side operated |
| **Other accessories** | |
| 912898 | Stainless steel plinth, against wall, 500mm width |
| 912917 | Stainless steel plinth, freestanding, 500mm width |
| 913244 | Energy optimizer kit 14A - factory fitted |
| 913676 | Electric mainswitch 25A 4mm2 NM for modular H800 electric units (factory fitted) |


The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

# Technical specifications

**Key Information:**

| | |
|---|---|
| **External dimensions, Width:** | 500 mm |
| **External dimensions, Depth:** | 900 mm |
| **External dimensions, Height:** | 550 mm |
| **Cupboard Cavity Dimensions (width):** | 340 mm |
| **Cupboard Cavity Dimensions (height):** | 330 mm |
| **Cupboard Cavity Dimensions (depth):** | 715 mm |
| **Cabinet temperature range:** | 30-110 °C |
| **Net weight:** | 25 kg |

**Sustainability**

| | |
|---|---|
| **Current consumption:** | 2.5 Amps |

Front

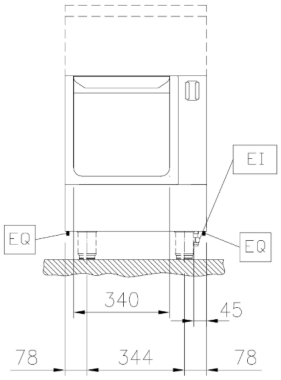


Side

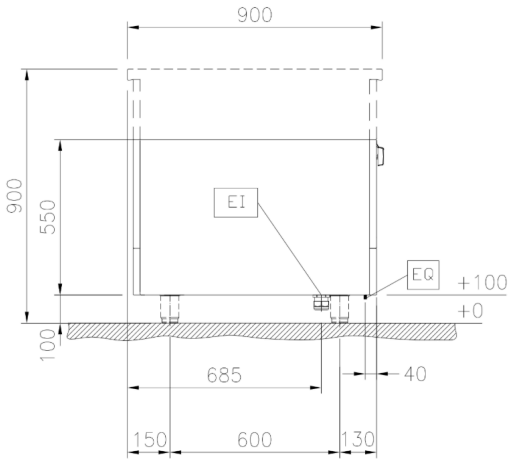


Top

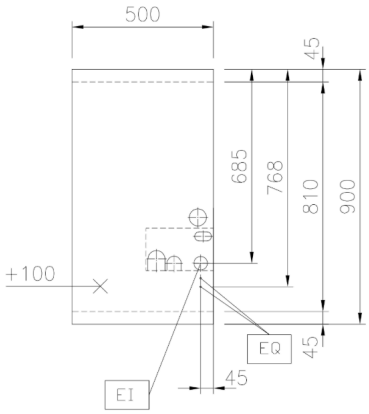


EI = Electrical inlet (power)



The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.