725101 (RI16R1FR)
1-door Roll-in Refrigerator 1600lt, 0+10°C, AISI 304, remote

Main Features

- Adjustable bottom door gasket.
- Automatic defrost and automatic evaporation of defrost water.
- Digital control panel with temperature display.
- Lift-up control panel to better access main components.
- Simple cooling unit easily accessible from the rear of the appliance.
- The operating temperature can be adjusted from 0 to +10 °C to suit both meat and dairy storage requirements.
- Universal shock-protectors on all sides.
- Ventilated cooling for optimal temperature distribution.
- Complies with main international certification bodies and is CE marked.
- Plug-in installation: 1 phase, 220/240V supply.
- One full door.
- Tropicalized unit.

Construction

- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Evaporator and fan are placed outside the cell to provide the maximum storage capacity.
- Evaporator cover is easily removable for service.
- External panels are in AISI 304 stainless steel for higher level of hygiene.
- Interior cell and external panel are constructed in 304 AISI stainless steel.
- Lockable door.
- Remote compressor to suit operating conditions.
- The whole interior cell is constructed of AISI 304 stainless steel with rounded corners for a better cleanability.

User Interface & Data Management

- Large digital white-digit display with humidity selection button (3 preset level), internal temperature display and setting, manual activation of defrost cycle and turbo frost cycle (to rapidly cool warm loads).
- Connect the product (with accessory) to the OneConnected Platform via Wi Fi or ethernet connection for a seamless remote experience. Real-time monitoring and analytics, alarm management, HACCP data management, APIs, and advanced features keep your fridge fully under control.

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Sustainability

- 75 mm thick insulation, with cyclopenthane injection for long-term insulation and energy saving.
- CFC and HCFC-free insulation.
- Finished in top quality materials to ensure durability.

Optional Accessories

PNC Code	Description
Handling - bakery	
922761	Bakery/pastry trolley with rack holding 600x400mm grids for 20 GN 1/1 oven and blast chiller freezer, 80mm pitch (16 runners)
922762	Bakery/pastry trolley with rack holding 400x600mm grids for 20 GN 2/1 oven and blast chiller freezer, 80mm pitch (16 runners)
Handling - banqueting	
922756	Banquet trolley with rack holding 54 plates for 20 GN 1/1 oven and blast chiller freezer, 74mm pitch
922760	Banquet trolley with rack holding 92 plates for 20 GN 2/1 oven and blast chiller freezer, 85mm pitch
922763	Banquet trolley with rack holding 45 plates for 20 GN 1/1 oven and blast chiller freezer, 90mm pitch
922764	Banquet trolley with rack holding 116 plates for 20 GN 2/1 oven and blast chiller freezer, 66mm pitch
Handling - gastronorm	
922683	Trolley with tray rack, 15 GN 1/1, 84mm pitch
922686	Trolley with tray rack, 15 GN 2/1, 84mm pitch
922753	Trolley with tray rack, 20 GN 1/1, 63mm pitch
922754	Trolley with tray rack, 16 GN 1/1, 80mm pitch
922757	Trolley with tray rack 20 GN 2/1, 63mm pitch
922758	Trolley with tray rack, 16 GN 2/1, 80mm pitch
Remote units	
880232	Remote unit -2+10°C for 1430lt refrigerated cabinets

Recommended Detergents

PNC Code	Description
0S2881	S01 STAINLESS STEEL SURFACE POLISHER; 6 BOTTLES X 750ML C/T
0S2883	S03 ALCOHOL BASE DETERGENT; 6 BOTTLES X 750ML; ADR&IMDG&IATA Limited Quantity
0S2884	S04 Glasses & Hard Surfaces Cleaner, 6 x 750ml bottles
0S3257	S05 - MULTIPURPOSE DEGREASER; 6PCS X 750ML; ADR&IMDG Limited Quantity

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Technical specifications

Electric	
Supply voltage:	220-240 V/1 ph/50/60 Hz
Key Information:	
External dimensions, Width:	1021 mm
External dimensions, Depth:	1175 mm
External dimensions, Height:	2273 mm
Number and type of doors:	1 Full
External side panels:	Stainless Steel AISI 304
External top panels:	Stainless Steel AISI 304
External door material:	Stainless Steel AISI 304
Internal panels material:	Stainless Steel AISI 304
Refrigeration Data	
Control type:	Digital
Operating temperature max.:	10 °C
Refrigeration type:	R134a;R513A;R426A
Suggested refrigeration power:	1380 W
Condition at evaporation temperature:	0 °C
Condition at condensation temperature:	55 °C
Condition at ambient temperature:	32 °C
Connection pipes (remote) - outlet:	9.5 mm
Connection pipes (remote) - inlet:	6 mm
ISO Certificates	
ISO Standards:	ISO 9001; ISO 14001; ISO 45001; ISO 50001
Type reference/certification group:	R160IR

Front

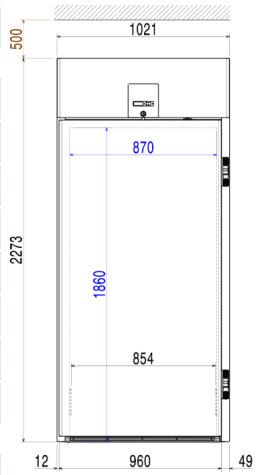

Side

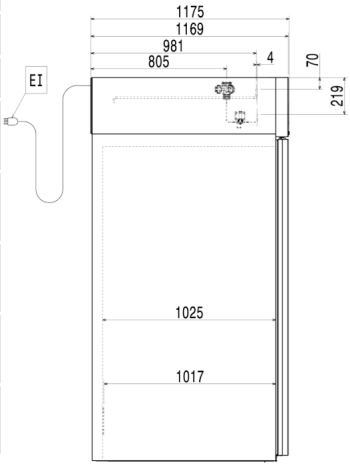

Top

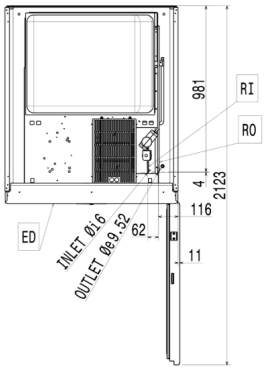

EI = Electrical inlet (power)
RO = Refrigerant Outlet
RI = Refrigerant Inlet

CE