Digital Cabinets

3-door Refrigerated Counter, +2+8°C, 600x400 capacity, AISI 304, R290

790557 (ABAR3TA3)

3-door Refrigerated Counter, +2+8°C, 600x400 capacity, AISI 304, R290 - ASIA

Main Features

- Completely automatic defrosting and automatic evaporation of defrost water.
- Adjustable temperature range from -2 °C to +8 °C to suit meat, fish and dairy storage requirements.
- Removable triple air chamber gasket to guarantee hygiene and perfect insulation.
- Forced air circulation for rapid cooling and an even temperature distribution.
- Digital control panel for temperature and parameter setting as well as to activate defrosting when necessary.
- Large storage area suitable to contain 600x400 grids.
- Performance guaranteed at ambient temperatures of +38°C.
- Access to all components from the front for easier maintenance operations.
- Electronics resistent to high voltage peaks.
- Coated finned evaporator with anti-corrosion treatment to avoid corrosion and to guarantee everlasting operation.
- HACCP compliant digital control: when temperature exceeds critical limits, acoustic and visual alarms are activated.
- Door frame heater avoids condensation build-up around the door frame.

Construction

- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Rounded internal corners for ease of cleaning.
- Fully extractable cooling unit to facilitate maintenance.
- External doors, front, back and side panels in AISI 304 Stainless Steel.
- Internal panels and fittings in AISI 304 Stainless Steel.
- Worktop in AISI 304 Stainless Steel.
- Built-in compressor.
- Self closing doors.
- Magnetic door seal to guarantee perfect closure.

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

A focus on sustainability

Sustainability

- CFC and HCFC-free insulation.
- High-density expanded polyurethane insulating foam, 60 mm in thickness, with cyclopenthane injection for long-term insulation and energy saving.
- Hydrocarbon refrigerant gas for the lowest environmental impact - CFC and HCFC free.
- Low energy consumption thanks to high efficiency components, insulation and optimized airflow.

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Technical specifications

Electric	
Supply voltage:	220-240 V/1N ph/50 Hz
Compressor power:	1/4 hp
Key Information:	
Number and type of grids (included):	3 (600x400)
External dimensions, Width:	2025 mm
External dimensions, Depth:	800 mm
External dimensions, Depth with Doors Open:	1267 mm
External dimensions, Height:	850 mm
Number and type of doors:	3 Full
Type of external material:	Stainless Steel AISI 201
Type of internal material:	Stainless Steel AISI 304
Gross capacity:	561 liter
Refrigeration Data	
Operating temperature min.:	2 °C
Operating temperature max.:	8 °C
Operating mode:	Ventilated
Sustainability	
Refrigerant type:	R290

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Installation drawings

Front

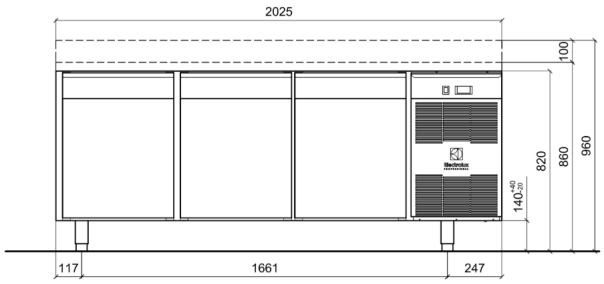

Side



Top

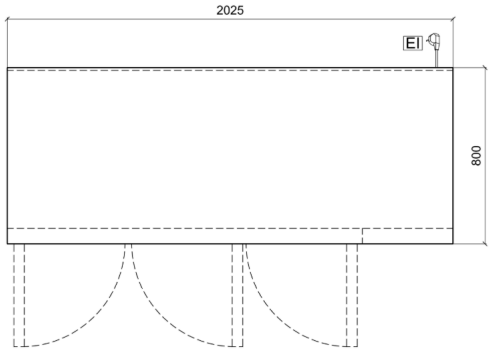

Other

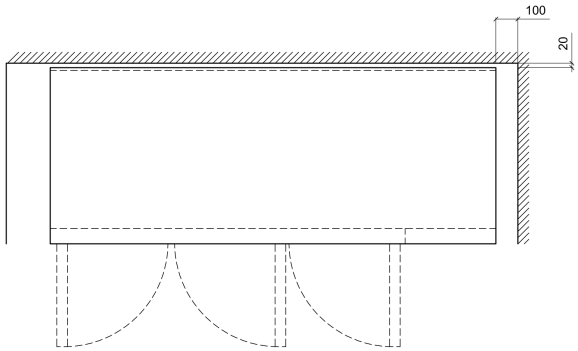

EI = Electrical inlet (power)
RI = Refrigerant Inlet

RO = Refrigerant Outlet

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Accessories

Optional Accessories

PNC Code	Description
Other accessories	
880656	Shelf for 600x400 Counters
880657	Side runners for 600x400 Counters
880659	Top for 3-compartment 600x400 Counters
880664	Kit 4 wheels (2 with brake) for 2-, 3-compartment 600x400 Counters

Recommended Detergents

PNC Code	Description
0S2881	S01 STAINLESS STEEL SURFACE POLISHER; 6 BOTTLES X 750ML C/T
0S2883	S03 ALCOHOL BASE DETERGENT; 6 BOTTLES X 750ML; ADR&IMDG&IATA Limited Quantity
0S2884	S04 Glasses & Hard Surfaces Cleaner, 6 x 750ml bottles
0S3257	S05 - MULTIPURPOSE DEGREASER; 6PCS X 750ML; ADR&IMDG Limited Quantity

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.