



738372 (KCICDC6FH)
6-Tub Ice Cream Dipping Cabinet 42.5" Long

Description

Front of the house display ice cream or gelato dipping cabinet. Exterior & interior panels stainless steel painted white, bottom panel is galvanized steel, top panel is galvanized material painted white to match. Fin & tube condenser to improve the performances in high-temperature environments. Automatic Defrost Cooling System and temperature control. Includes (1) NSF® certified temperature gauge, and (6) barrel ice cream tub frames; (6) gelato pan is an available option. Front is radius white plastic, lit from behind, for customer supplied signage if desired. Additional freezer storage on operator side.

Ropak tub bracket insert included after select serial number 004342000182
Dipper well accessory available for units after select serial number 005242000182

R290 gas in refrigeration circuit.
ETL Safety and Sanitation certified.
3/5 Years warranty.

Main Features

- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Bright LED illumination, enhancing product visibility for impactful merchandising
- Crystal-clear glass panel delivers superior product visibility
- Fan cooled condenser to cope with heavy duty conditions
- Included as standard 1 NSF® certified temperature gauge and 6-barrel ice cream tub frame.
- Bottom drain with plug for easy interior cleaning and defrost water discharge
- LED illuminated curved front panel, for flexible high visibility branding
- Holders keep tubs securely fixed in place
- Ropak tub bracket insert included for versatile tub positioning and secure operation.
- On/off switch controls interior LED lights
- On/off switch controls Front Panel LED lights
- Sliding top doors equipped with wide, durable external pull handles for easy operation and reliable access in fast-paced environments.
- Refrigerated rear storage compartment
- Latched storage compartment door minimizes air loss, improving temperature retention and energy efficiency
- Removable rear door gasket for easy cleaning operations
- Sliding, removable sneeze guard doors promote hygiene while providing flexibility for high-traffic and high-volume service

Construction

- Painted white steel exterior, for durable and sleek finish
- Tempered glass viewing pans & sliding lids
- Holds 10 standard sized 3-gallon ice cream tubs. (6 in display section and 4 in storage section)
- Painted white steel interior for durable, bright and clean polished look for elevated presentation
- Plexiglass sliding shields.
- Locking lids and key protect the contents of the unit.
- Heavy-duty, locking casters keeps the unit in place but allow position adjusting.
- Lowered glass front enhances product visibility
- Even cooling throughout the unit with advanced cold wall technology
- Aluminum alloy worktop for durable functionality

Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- Low energy consumption thanks to high efficiency components, insulation and optimized airflow.
- Interior LED light to save energy and for best internal visibility.
- 70 mm insulation for energy saving

Optional Accessories

PNC Code	Description
Panels	
882013	Combined 5L Pan Support Metal Frame & Support Acrylic Frame for 6 Gelato Pans in the 6-Tub Ice Cream Dipping Cabinet
Sink units and mixing taps	
882016	Dipper Well Kit With Faucet

Technical specifications

Electric

Supply voltage:	115 V/1 ph/60 Hz
Electrical power max:	0.25 kW
Plug type:	USA NEMA 5-15P
Current consumption:	1.4 Amps
Compressor power:	1/5 hp
Power Cable Length:	2000 mm

Capacity:

Gross capacity:	11.4773 cu.feet
-----------------	-----------------

Key Information:

Door hinges:	Slide in
External dimensions, Width:	42 1/2" (1080 mm)
External dimensions, Depth:	33 " (838 mm)
External dimensions, height:	50 " (1270 mm)
Number and type of doors:	5
Internal Dimensions (depth):	21 5/8" (550 mm)
Internal Dimensions (height):	23 5/8" (600 mm)
Internal Dimensions (width):	35 7/16" (900 mm)

Net weight:	240 lbs (109 kg)
Shipping width:	39 9/16" (1005 mm)
Shipping depth:	47 5/8" (1210 mm)
Shipping height:	50 9/16" (1285 mm)
Shipping weight:	304 lbs (138 kg)
Shipping volume:	55.18 ft ³ (1.56 m ³)
Type of external material:	Prepainted white
Type of internal material:	White Prepainted Steel
Approvals	ETL C&US;ETL SANITATION


Refrigeration Data

Operating temperature min.:	-18.4 °F (-28 °C)
Operating temperature max.:	6.8 °F (-14 °C)
Defrost type:	Automatic
Evaporator type	Finned
Refrigerant unit side:	Right


Sustainability

Refrigerant type:	R290
GWP Index:	3
Refrigerant weight:	95 g

Front

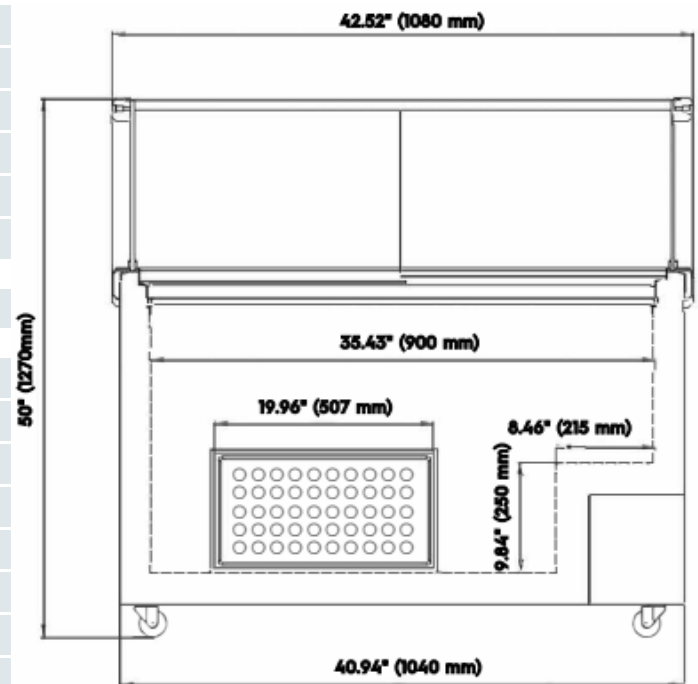

Side

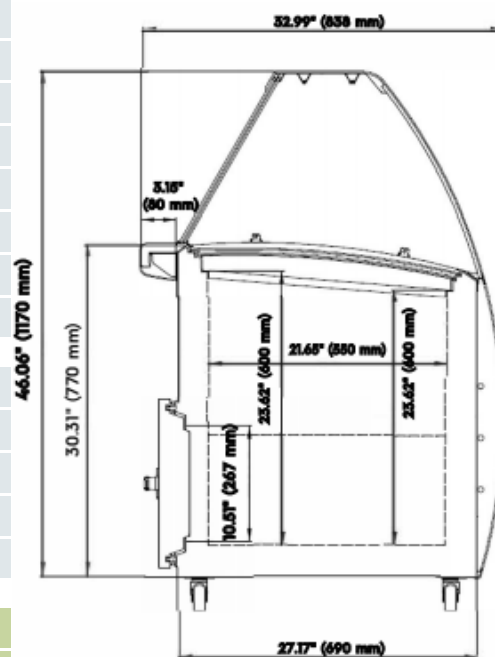

EI = Electrical inlet (power)

RO = Refrigerant Outlet

RI = Refrigerant Inlet

