



Range Overview

SkyLine Cook&Chill

Index

| | |
|--|-----------|
| SkyLine Premium^S Combi Boiler Oven | 5 |
| SkyLine Premium Combi Boiler Oven | 18 |
| SkyLine Pro^S Combi Boilerless Oven | 25 |
| SkyLine Pro Combi Boilerless Oven | 32 |
| SkyLine Chill^S | 39 |

SkyLine Premium^s

Touch panel
Boiler



Touch panel

Super-intuitive, simple-to-learn and -use and customizable touch screen interface designed to make life easy. Color-blind friendly. Available in over 30 different languages.



101 humidity settings

Add variety to your cooking with 101 humidity settings from 0% to 100% boiler-generated steam, with automatic exhaust valve opening for extra crispy food.



OnE connectivity

ready

SkyLine Premium^s connectivity gives real time access to your appliance from any smart device.



Green Version

Triple-glass door reduces energy consumption thanks to higher insulation.



Program mode

Save, organize into categories, and share up to **1.000 recipes** via USB or OnE connectivity.



OptiFlow

Perfect, even cooking results thanks to revolutionary high-tech **OptiFlow** air distribution system which guarantees uniform heat distribution.



6-sensor probe as standard

Precise measurement of the exact core temperature of your food.



Lambda sensor as standard

Precise real-time measurement and control over the humidity in the Oven chamber.



An extra effortless benefit

Stress-free efficiency and productivity with **SkyDuo**. Anticipating your needs with the self-intuitive connection between SkyLine Premium^s Ovens and SkyLine Chill^s and viceversa. The appliances guide you through the Cook&Chill process.



Advanced features

Simplify your life and make your workflow leaner by personalizing your **SkyHub homepage** with your favorite functions. Use **MyPlanner** to plan your daily work and receive personalized alerts for your tasks. **Plan-n-Save** organizes your loads in the most time- and energy-efficient way possible.






for Plan-n-Save



SkyClean

Cut your cleaning costs up to 15%. Flawless cleaning results, **green functions** and **automatic boiler descaling**. Flexible choice of 3 different chemicals to serve you better: **solid, liquid or 85% biodegradable enzymatic**.

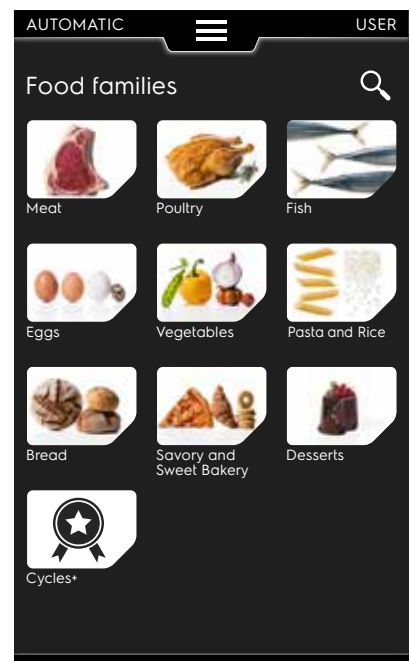

SkyLine Premium^S Combi Boiler Oven

Touch 6GN1/1 electric - Green Version



| | 229720 | 229740 | 229700 | 229710 | 229726 |
|--------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| Number of grids | 6 | 6 | 5 | 6 | 6 |
| Runner pitch - mm | 67 | 67 | 85 | 67 | 67 |
| External dimensions - mm | | | | | |
| width | 867 | 867 | 867 | 867 | 867 |
| depth | 775 | 775 | 775 | 775 | 775 |
| height | 808 | 808 | 808 | 808 | 808 |
| Electric power - kW | 11 | 11 | 11 | 11 | 11 |
| Electric amperage - A | 16,3 | 16,3 | 16,3 | 28,6 | 16,3 |
| Electrical connection | 380-415V 3N 50/60 Hz | 380-415V 3N 50/60 Hz | 380-415V 3N 50/60 Hz | 220-240V 3N 50/60 Hz | 380-415V 3N 50/60 Hz |
| Boiler AISI 316L | | • | | | |
| Left hinged door | | | | | • |
| 3-glass door | • | • | • | • | • |

SkyLine Premium^S Combi Boiler Oven

Touch 6GN1/1 electric



| | 217720 | 217750 | 217700 | 217710 | 217726 | 227750 |
|--------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| Number of grids | 6 | 6 | 5 | 6 | 6 | 5 |
| Runner pitch - mm | 67 | 67 | 85 | 67 | 67 | 80 |
| External dimensions - mm | | | | | | |
| width | 867 | 867 | 867 | 867 | 867 | 867 |
| depth | 775 | 775 | 775 | 775 | 775 | 775 |
| height | 808 | 808 | 808 | 808 | 808 | 808 |
| Electric power - kW | 11 | 11 | 11 | 11 | 11 | 11 |
| Electric amperage - A | 16,3 | 16,3 | 16,3 | 28,6 | 16,3 | 16,3 |
| Electrical connection | 380-415V 3N 50/60 Hz | 380-415V 3N 50/60 Hz | 380-415V 3N 50/60 Hz | 220-240V 3N 50/60 Hz | 380-415V 3N 50/60 Hz | 380-415V 3N 50/60 Hz |
| Boiler AISI 316L | | • | | | | |
| Left hinged door | | | | | • | |
| Bakery (400x600 mm) | | | | | | • |

SkyLine Premium^S Combi Boiler Oven

Touch 6GN2/1 electric - Green Version



| | 229721 | 229741 | 229711 | 229727 |
|--------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| Number of grids | 6 | 6 | 6 | 6 |
| Runner pitch - mm | 67 | 67 | 67 | 67 |
| External dimensions - mm | | | | |
| width | 1090 | 1090 | 1090 | 1090 |
| depth | 971 | 971 | 971 | 971 |
| height | 808 | 808 | 808 | 808 |
| Electric power - kW | 21,4 | 21,4 | 21,4 | 21,4 |
| Electric amperage - A | 30.5 | 30.5 | 55,7 | 31,9 |
| Electrical connection | 380-415V 3N 50/60 Hz | 380-415V 3N 50/60 Hz | 220-240V 3N 50/60 Hz | 380-415V 3N 50/60 Hz |
| Boiler AISI 316L | | • | | |
| Left hinged door | | | | • |
| 3-glass door | • | • | • | • |

SkyLine Premium^S Combi Boiler Oven

Touch 6GN2/1 electric



| | 217721 | 217751 | 217711 | 217727 |
|--------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| Number of grids | 6 | 6 | 6 | 6 |
| Runner pitch - mm | 67 | 67 | 67 | 67 |
| External dimensions - mm | | | | |
| width | 1090 | 1090 | 1090 | 1090 |
| depth | 971 | 971 | 971 | 971 |
| height | 808 | 808 | 808 | 808 |
| Electric power - kW | 21,4 | 21,4 | 21,4 | 21,4 |
| Electric amperage - A | 31,9 | 31,9 | 55,7 | 31,9 |
| Electrical connection | 380-415V 3N 50/60 Hz | 380-415V 3N 50/60 Hz | 220-240V 3N 50/60 Hz | 380-415V 3N 50/60 Hz |
| Boiler AISI 316L | | • | | |
| Left hinged door | | | | • |

SkyLine Premium^s Combi Boiler Oven

Touch 10GN1/1 electric - Green Version



| | 229722 | 229742 | 229702 | 229712 | 229728 |
|--------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| Number of grids | 10 | 10 | 8 | 10 | 10 |
| Runner pitch - mm | 67 | 67 | 85 | 67 | 67 |
| External dimensions - mm | | | | | |
| width | 867 | 867 | 867 | 867 | 867 |
| depth | 775 | 775 | 775 | 775 | 775 |
| height | 1058 | 1058 | 1058 | 1058 | 1058 |
| Electric power - kW | 19 | 19 | 19 | 19 | 19 |
| Electric amperage - A | 28,3 | 28,3 | 28,3 | 49,5 | 28,3 |
| Electrical connection | 380-415V 3N 50/60 Hz | 380-415V 3N 50/60 Hz | 380-415V 3N 50/60 Hz | 220-240V 3N 50/60 Hz | 380-415V 3N 50/60 Hz |
| Boiler AISI 316L | | • | | | |
| Left hinged door | | | | | • |
| 3-glass door | • | • | • | • | • |

SkyLine Premium^s Combi Boiler Oven

Touch 10GN1/1 electric



| | 217722 | 217752 | 217702 | 217712 | 217728 | 227752 |
|--------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| Number of grids | 10 | 10 | 8 | 10 | 10 | 8 |
| Runner pitch - mm | 67 | 67 | 85 | 67 | 67 | 80 |
| External dimensions - mm | | | | | | |
| width | 867 | 867 | 867 | 867 | 867 | 867 |
| depth | 775 | 775 | 775 | 775 | 775 | 775 |
| height | 1058 | 1058 | 1058 | 1058 | 1058 | 1058 |
| Electric power - kW | 19 | 19 | 19 | 19 | 19 | 19 |
| Electric amperage - A | 28,3 | 28,3 | 28,3 | 49,5 | 28,3 | 28,3 |
| Electrical connection | 380-415V 3N 50/60 Hz | 380-415V 3N 50/60 Hz | 380-415V 3N 50/60 Hz | 220-240V 3N 50/60 Hz | 380-415V 3N 50/60 Hz | 380-415V 3N 50/60 Hz |
| Boiler AISI 316L | | • | | | | |
| Left hinged door | | | | | • | |
| Bakery (400x600 mm) | | | | | | • |

SkyLine Premium^s Combi Boiler Oven

Touch 10GN2/1 electric - Green Version



| | 229723 | 229743 | 229713 | 229729 |
|--------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| Number of grids | 10 | 10 | 10 | 10 |
| Runner pitch - mm | 67 | 67 | 67 | 67 |
| External dimensions - mm | | | | |
| width | 1090 | 1090 | 1090 | 1090 |
| depth | 971 | 971 | 971 | 971 |
| height | 1058 | 1058 | 1058 | 1058 |
| Electric power - kW | 37,4 | 37,4 | 37,4 | 37,4 |
| Electric amperage - A | 55,8 | 55,8 | 97,6 | 55,8 |
| Electrical connection | 380-415V 3N 50/60 Hz | 380-415V 3N 50/60 Hz | 220-240V 3N 50/60 Hz | 380-415V 3N 50/60 Hz |
| Boiler AISI 316L | | • | | |
| Left hinged door | | | | • |
| 3-glass door | • | • | • | • |

SkyLine Premium^s Combi Boiler Oven

Touch 10GN2/1 electric



| | 217723 | 217753 | 217713 | 217729 |
|--------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| Number of grids | 10 | 10 | 10 | 10 |
| Runner pitch - mm | 67 | 67 | 67 | 67 |
| External dimensions - mm | | | | |
| width | 1090 | 1090 | 1090 | 1090 |
| depth | 971 | 971 | 971 | 971 |
| height | 1058 | 1058 | 1058 | 1058 |
| Electric power - kW | 37,4 | 37,4 | 37,4 | 37,4 |
| Electric amperage - A | 55,9 | 55,8 | 97,6 | 55,9 |
| Electrical connection | 380-415V 3N 50/60 Hz | 380-415V 3N 50/60 Hz | 220-240V 3N 50/60 Hz | 380-415V 3N 50/60 Hz |
| Boiler AISI 316L | | • | | |
| Left hinged door | | | | • |

SkyLine Premium^s Combi Boiler Oven

Touch 20GN1/1 electric - Green Version



| | 229724 | 229744 | 229704 | 229714 |
|--------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| Number of grids | 20 | 20 | 16 | 20 |
| Runner pitch - mm | 63 | 63 | 84 | 63 |
| External dimensions - mm | | | | |
| width | 911 | 911 | 911 | 911 |
| depth | 865 | 865 | 865 | 865 |
| height | 1794 | 1794 | 1794 | 1794 |
| Electric power - kW | 37,7 | 37,7 | 37,7 | 37,7 |
| Electric amperage - A | 56,2 | 56,2 | 56,2 | 98,3 |
| Electrical connection | 380-415V 3N 50/60 Hz | 380-415V 3N 50/60 Hz | 380-415V 3N 50/60 Hz | 220-240V 3N 50/60 Hz |
| Boiler AISI 316L | | • | | |
| 3-glass door | • | • | • | • |

SkyLine Premium^s Combi Boiler Oven

Touch 20GN1/1 electric



| | 217724 | 217754 | 217704 | 217714 | 237054 |
|--------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| Number of grids | 20 | 20 | 16 | 20 | 16 |
| Runner pitch - mm | 63 | 63 | 84 | 63 | 80 |
| External dimensions - mm | | | | | |
| width | 911 | 911 | 911 | 911 | 911 |
| depth | 865 | 865 | 865 | 865 | 865 |
| height | 1794 | 1794 | 1794 | 1794 | 1794 |
| Electric power - kW | 37,7 | 37,7 | 37,7 | 37,7 | 37,7 |
| Electric amperage - A | 56,2 | 56,2 | 56,2 | 98,3 | 56,2 |
| Electrical connection | 380-415V 3N 50/60 Hz | 380-415V 3N 50/60 Hz | 380-415V 3N 50/60 Hz | 220-240V 3N 50/60 Hz | 380-415V 3N 50/60 Hz |
| Boiler AISI 316L | | • | | | |
| Bakery (400x600 mm) | | | | | • |

SkyLine Premium^s Combi Boiler Oven

Touch 20GN2/1 electric - Green Version



| | 229725 | 229745 | 229715 |
|--------------------------|-------------------------|-------------------------|-------------------------|
| Number of grids | 20 | 20 | 20 |
| Runner pitch - mm | 63 | 63 | 63 |
| External dimensions - mm | | | |
| width | 1162 | 1162 | 1162 |
| depth | 1067 | 1067 | 1067 |
| height | 1794 | 1794 | 1794 |
| Electric power - kW | 65,4 | 65,4 | 65,4 |
| Electric amperage - A | 97,6 | 97,6 | 170,8 |
| Electrical connection | 380-415V 3N 50/60 Hz | 380-415V 3N 50/60 Hz | 220-240V 3N 50/60 Hz |
| Boiler AISI 316L | | • | |
| 3-glass door | • | • | • |

SkyLine Premium^s Combi Boiler Oven

Touch 20GN2/1 electric



| | 217725 | 217755 | 217715 |
|--------------------------|-------------------------|-------------------------|-------------------------|
| Number of grids | 20 | 20 | 20 |
| Runner pitch - mm | 63 | 63 | 63 |
| External dimensions - mm | | | |
| width | 1162 | 1162 | 1162 |
| depth | 1067 | 1067 | 1067 |
| height | 1794 | 1794 | 1794 |
| Electric power - kW | 65,4 | 65,4 | 65,4 |
| Electric amperage - A | 97,6 | 97,6 | 170,8 |
| Electrical connection | 380-415V 3N 50/60 Hz | 380-415V 3N 50/60 Hz | 220-240V 3N 50/60 Hz |
| Boiler AISI 316L | | • | |

SkyLine Premium^S Combi Boiler Oven

Touch 6GN1/1 gas - Green Version



| | 229760 | 229790 | 229770 | 229766 |
|--------------------------|----------------------|----------------------|----------------------|----------------------|
| Number of grids | 6 | 6 | 6 | 6 |
| Runner pitch - mm | 67 | 67 | 67 | 67 |
| External dimensions - mm | | | | |
| width | 867 | 867 | 867 | 867 |
| depth | 775 | 775 | 775 | 775 |
| height | 808 | 808 | 808 | 808 |
| Gas power - kW | 19 | 19 | 19 | 19 |
| Electric power - kW | 1,1 | 1,1 | 1,1 | 1,1 |
| Electric amperage - A | 5 | 5 | 5 | 5 |
| Electrical connection | 220-240V 1N 50 Hz | 220-240V 1N 60 Hz | 220-240V 1N 50 Hz | 220-240V 1N 50 Hz |
| Boiler AISI 316L | | | • | |
| Left hinged door | | | | • |
| 3-glass door | • | • | • | • |

SkyLine Premium^S Combi Boiler Oven

Touch 6GN1/1 gas



| | 217780 | 225760 | 217790 | 217760 | 217786 | 227780 |
|--------------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|
| Number of grids | 6 | 6 | 6 | 6 | 6 | 5 |
| Runner pitch - mm | 67 | 67 | 67 | 67 | 67 | 80 |
| External dimensions - mm | | | | | | |
| width | 867 | 867 | 867 | 867 | 867 | 867 |
| depth | 775 | 775 | 775 | 775 | 775 | 775 |
| height | 808 | 808 | 808 | 808 | 808 | 808 |
| Gas power - kW | 19 | 19 | 19 | 19 | 19 | 19 |
| Electric power - kW | 1,1 | 1,1 | 1,1 | 1,1 | 1,1 | 1,1 |
| Electric amperage - A | 5 | 5 | 5 | 5 | 5 | 5 |
| Electrical connection | 220-240V 1N 50 Hz | 220-240V 1N 60 Hz | 220-240V 1N 50 Hz | 220-240V 1N 50 Hz | 220-240V 1N 50 Hz | 220-240V 1N 50 Hz |
| Boiler AISI 316L | | | • | | | |
| Left hinged door | | | | | • | |
| Bakery (400x600 mm) | | | | | | • |
| LPG gas | | | | • | | |

SkyLine Premium^S Combi Boiler Oven

Touch 6GN2/1 gas - Green Version



| | 229761 | 229791 | 229771 | 229767 |
|--------------------------|----------------------|----------------------|----------------------|----------------------|
| Number of grids | 6 | 6 | 6 | 6 |
| Runner pitch - mm | 67 | 67 | 67 | 67 |
| External dimensions - mm | | | | |
| width | 1090 | 1090 | 1090 | 1090 |
| depth | 971 | 971 | 971 | 971 |
| height | 808 | 808 | 808 | 808 |
| Gas power - kW | 32 | 32 | 32 | 32 |
| Electric power - kW | 1,5 | 1,5 | 1,5 | 1,5 |
| Electric amperage - A | 6,8 | 6,8 | 6,8 | 6,8 |
| Electrical connection | 220-240V 1N 50 Hz | 220-240V 1N 60 Hz | 220-240V 1N 50 Hz | 220-240V 1N 50 Hz |
| Boiler AISI 316L | | | • | |
| Left hinged door | | | | • |
| 3-glass door | • | • | • | • |

SkyLine Premium^S Combi Boiler Oven

Touch 6GN2/1 gas



| | 217781 | 225761 | 217791 | 217761 | 217787 |
|--------------------------|----------------------|----------------------|----------------------|----------------------|----------------------|
| Number of grids | 6 | 6 | 6 | 6 | 6 |
| Runner pitch - mm | 67 | 67 | 67 | 67 | 67 |
| External dimensions - mm | | | | | |
| width | 1090 | 1090 | 1090 | 1090 | 1090 |
| depth | 971 | 971 | 971 | 971 | 971 |
| height | 808 | 808 | 808 | 808 | 808 |
| Gas power - kW | 32 | 32 | 32 | 32 | 32 |
| Electric power - kW | 1,5 | 1,5 | 1,5 | 1,5 | 1,5 |
| Electric amperage - A | 6,8 | 6,8 | 6,8 | 6,8 | 6,8 |
| Electrical connection | 220-240V 1N 50 Hz | 220-240V 1N 60 Hz | 220-240V 1N 50 Hz | 220-240V 1N 50 Hz | 220-240V 1N 50 Hz |
| Boiler AISI 316L | | | • | | |
| Left hinged door | | | | | • |
| LPG gas | | | | • | |

SkyLine Premium^s Combi Boiler Oven

Touch 10GN1/1 gas - Green Version



| | 229762 | 229792 | 229772 | 229768 |
|--------------------------|----------------------|----------------------|----------------------|----------------------|
| Number of grids | 10 | 10 | 10 | 10 |
| Runner pitch - mm | 67 | 67 | 67 | 67 |
| External dimensions - mm | | | | |
| width | 867 | 867 | 867 | 867 |
| depth | 775 | 775 | 775 | 775 |
| height | 1058 | 1058 | 1058 | 1058 |
| Gas power - kW | 31 | 31 | 31 | 31 |
| Electric power - kW | 1,1 | 1,1 | 1,1 | 1,1 |
| Electric amperage - A | 5 | 5 | 5 | 5 |
| Electrical connection | 220-240V 1N 50 Hz | 220-240V 1N 60 Hz | 220-240V 1N 50 Hz | 220-240V 1N 50 Hz |
| Boiler AISI 316L | | | • | |
| Left hinged door | | | | • |
| 3-glass door | • | • | • | • |

SkyLine Premium^s Combi Boiler Oven

Touch 10GN1/1 gas



| | 217782 | 225762 | 217792 | 217762 | 217788 | 227782 |
|--------------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|
| Number of grids | 10 | 10 | 10 | 10 | 10 | 8 |
| Runner pitch - mm | 67 | 67 | 67 | 67 | 67 | 80 |
| External dimensions - mm | | | | | | |
| width | 867 | 867 | 867 | 867 | 867 | 867 |
| depth | 775 | 775 | 775 | 775 | 775 | 775 |
| height | 1058 | 1058 | 1058 | 1058 | 1058 | 1058 |
| Gas power - kW | 31 | 31 | 31 | 31 | 31 | 31 |
| Electric power - kW | 1,1 | 1,1 | 1,1 | 1,1 | 1,1 | 1,1 |
| Electric amperage - A | 5 | 5 | 5 | 5 | 5 | 5 |
| Electrical connection | 220-240V 1N 50 Hz | 220-240V 1N 60 Hz | 220-240V 1N 50 Hz | 220-240V 1N 50 Hz | 220-240V 1N 50 Hz | 220-240V 1N 50 Hz |
| Boiler AISI 316L | | | • | | | |
| Left hinged door | | | | | • | |
| Bakery (400x600 mm) | | | | | | • |
| LPG gas | | | | • | | |

SkyLine Premium^S Combi Boiler Oven

Touch 10GN2/1 gas - Green Version



| | 229763 | 229793 | 229773 | 229769 |
|--------------------------|----------------------|----------------------|----------------------|----------------------|
| Number of grids | 10 | 10 | 10 | 10 |
| Runner pitch - mm | 67 | 67 | 67 | 67 |
| External dimensions - mm | | | | |
| width | 1090 | 1090 | 1090 | 1090 |
| depth | 971 | 971 | 971 | 971 |
| height | 1058 | 1058 | 1058 | 1058 |
| Gas power - kW | 47 | 47 | 47 | 47 |
| Electric power - kW | 1,5 | 1,5 | 1,5 | 1,5 |
| Electric amperage - A | 6,5 | 6,5 | 6,5 | 6,5 |
| Electrical connection | 220-240V 1N 50 Hz | 220-240V 1N 60 Hz | 220-240V 1N 50 Hz | 220-240V 1N 50 Hz |
| Boiler AISI 316L | | | • | |
| Left hinged door | | | | • |
| 3-glass door | • | • | • | • |

SkyLine Premium^S Combi Boiler Oven

Touch 10GN2/1 gas



| | 217783 | 225763 | 217793 | 217763 | 217789 |
|--------------------------|----------------------|----------------------|----------------------|----------------------|----------------------|
| Number of grids | 10 | 10 | 10 | 10 | 10 |
| Runner pitch - mm | 67 | 67 | 67 | 67 | 67 |
| External dimensions - mm | | | | | |
| width | 1090 | 1090 | 1090 | 1090 | 1090 |
| depth | 971 | 971 | 971 | 971 | 971 |
| height | 1058 | 1058 | 1058 | 1058 | 1058 |
| Gas power - kW | 47 | 47 | 47 | 47 | 47 |
| Electric power - kW | 1,5 | 1,5 | 1,5 | 1,5 | 1,5 |
| Electric amperage - A | 6,8 | 6,8 | 6,8 | 6,8 | 6,8 |
| Electrical connection | 220-240V 1N 50 Hz | 220-240V 1N 60 Hz | 220-240V 1N 50 Hz | 220-240V 1N 50 Hz | 220-240V 1N 50 Hz |
| Boiler AISI 316L | | | • | | |
| Left hinged door | | | | | • |
| LPG gas | | | | • | |

SkyLine Premium^S Combi Boiler Oven

Touch 20GN1/1 gas - Green Version



| | 229764 | 229794 | 229774 |
|--------------------------|----------------------|----------------------|----------------------|
| Number of grids | 20 | 20 | 20 |
| Runner pitch - mm | 63 | 63 | 63 |
| External dimensions - mm | | | |
| width | 911 | 911 | 911 |
| depth | 865 | 865 | 865 |
| height | 1794 | 1794 | 1794 |
| Gas power - kW | 54 | 54 | 54 |
| Electric power - kW | 1,8 | 1,8 | 1,8 |
| Electric amperage - A | 8,1 | 8,1 | 8,1 |
| Electrical connection | 220-240V 1N 50 Hz | 220-240V 1N 60 Hz | 220-240V 1N 50 Hz |
| Boiler AISI 316L | | | • |
| 3-glass door | • | • | • |

SkyLine Premium^S Combi Boiler Oven

Touch 20GN1/1 gas



| | 217784 | 225764 | 217794 | 217764 | 237064 |
|--------------------------|----------------------|----------------------|----------------------|----------------------|----------------------|
| Number of grids | 20 | 20 | 20 | 20 | 16 |
| Runner pitch - mm | 63 | 63 | 63 | 63 | 80 |
| External dimensions - mm | | | | | |
| width | 911 | 911 | 911 | 911 | 911 |
| depth | 865 | 865 | 865 | 865 | 865 |
| height | 1794 | 1794 | 1794 | 1794 | 1794 |
| Gas power - kW | 54 | 54 | 54 | 54 | 54 |
| Electric power - kW | 1,8 | 1,8 | 1,8 | 1,8 | 1,8 |
| Electric amperage - A | 8,1 | 8,1 | 8,1 | 8,1 | 8,1 |
| Electrical connection | 220-240V 1N 50 Hz | 220-240V 1N 60 Hz | 220-240V 1N 50 Hz | 220-240V 1N 50 Hz | 220-240V 1N 50 Hz |
| Boiler AISI 316L | | | • | | |
| Bakery (400x600 mm) | | | | | • |
| LPG gas | | | | • | |

SkyLine Premium^S Combi Boiler Oven

Touch 20GN2/1 gas - Green Version



| | 229765 | 229795 | 229775 |
|--------------------------|----------------------|----------------------|----------------------|
| Number of grids | 20 | 20 | 20 |
| Runner pitch - mm | 63 | 63 | 63 |
| External dimensions - mm | | | |
| width | 1162 | 1162 | 1162 |
| depth | 1067 | 1067 | 1067 |
| height | 1794 | 1794 | 1794 |
| Gas power - kW | 100 | 100 | 100 |
| Electric power - kW | 2,5 | 2,5 | 2,5 |
| Electric amperage - A | 11,3 | 11,3 | 11,3 |
| Electrical connection | 220-240V 1N 50 Hz | 220-240V 1N 60 Hz | 220-240V 1N 50 Hz |
| Boiler AISI 316L | | | • |
| 3-glass door | • | • | • |

SkyLine Premium^S Combi Boiler Oven

Touch 20GN2/1 gas



| | 217785 | 225765 | 217795 | 217765 |
|--------------------------|----------------------|----------------------|----------------------|----------------------|
| Number of grids | 20 | 20 | 20 | 20 |
| Runner pitch - mm | 63 | 63 | 63 | 63 |
| External dimensions - mm | | | | |
| width | 1162 | 1162 | 1162 | 1162 |
| depth | 1067 | 1067 | 1067 | 1067 |
| height | 1794 | 1794 | 1794 | 1794 |
| Gas power - kW | 100 | 100 | 100 | 100 |
| Electric power - kW | 2,5 | 2,5 | 2,5 | 2,5 |
| Electric amperage - A | 11,3 | 11,3 | 11,3 | 11,3 |
| Electrical connection | 220-240V 1N 50 Hz | 220-240V 1N 60 Hz | 220-240V 1N 50 Hz | 220-240V 1N 50 Hz |
| Boiler AISI 316L | | | • | |
| LPG gas | | | | • |

SkyLine Premium

Digital panel

Boiler



Program mode

Save and share your programs via USB or OnE connectivity. 100 free programs and 4 cooking phases.



OptiFlow

Perfect, even cooking results thanks to revolutionary high-tech **OptiFlow** air distribution system which guarantees uniform heat distribution.



Food core temperature control probe

Exact temperature reading with single sensor probe and for extra precision choose the optional **6-sensor probe**.



Lambda sensor as standard

Precise real-time measurement and control over humidity in the Oven chamber for every type of food and size of load.



SkyClean

Flawless cleaning results and **integrated boiler descaling**. Flexible choice of 3 different chemicals to serve you better: **solid, liquid or 85% biodegradable enzymatic**.



Digital panel

Digital panel with unique light-guided selection simplifies every task.




11 humidity settings

Add variety to your cooking with **11 humidity settings** from 0% to 100% boiler-generated steam, with automatic exhaust valve opening for extra crispy food.



OnE connectivity ready

SkyLine Premium connectivity gives **real time access** to your appliance from any smart device.

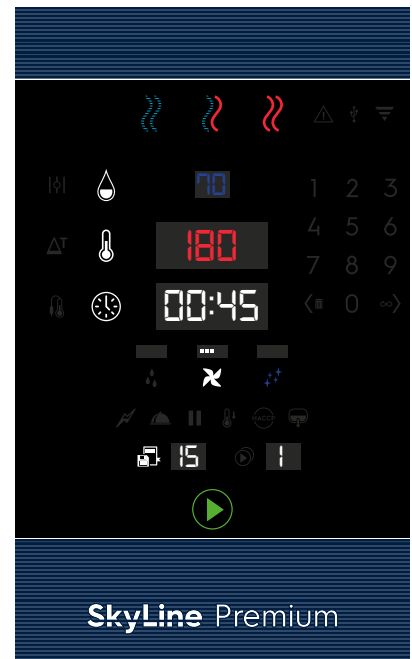

SkyLine Premium Combi Boiler Oven

Digital 6GN1/1 electric



| | 217820 | 217850 | 217800 | 217810 |
|--------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| Number of grids | 6 | 6 | 5 | 6 |
| Runner pitch - mm | 67 | 67 | 85 | 67 |
| External dimensions - mm | | | | |
| width | 867 | 867 | 867 | 867 |
| depth | 775 | 775 | 775 | 775 |
| height | 808 | 808 | 808 | 808 |
| Electric power - kW | 11 | 11 | 11 | 11 |
| Electric amperage - A | 16,3 | 16,3 | 16,3 | 28,6 |
| Electrical connection | 380-415V 3N 50/60 Hz | 380-415V 3N 50/60 Hz | 380-415V 3N 50/60 Hz | 220-240V 3N 50/60 Hz |
| Boiler AISI 316L | | • | | |

SkyLine Premium Combi Boiler Oven

Digital 6GN2/1 electric



| | 217821 | 217851 | 217811 |
|--------------------------|-------------------------|-------------------------|-------------------------|
| Number of grids | 6 | 6 | 6 |
| Runner pitch - mm | 67 | 67 | 67 |
| External dimensions - mm | | | |
| width | 1090 | 1090 | 1090 |
| depth | 971 | 971 | 971 |
| height | 808 | 808 | 808 |
| Electric power - kW | 21,4 | 21,4 | 21,4 |
| Electric amperage - A | 31,9 | 31,9 | 55,7 |
| Electrical connection | 380-415V 3N 50/60 Hz | 380-415V 3N 50/60 Hz | 220-240V 3N 50/60 Hz |
| Boiler AISI 316L | | • | |

SkyLine Premium Combi Boiler Oven

Digital 10GN1/1 electric



| | 217822 | 217852 | 217802 | 217812 |
|--------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| Number of grids | 10 | 10 | 8 | 10 |
| Runner pitch - mm | 67 | 67 | 85 | 67 |
| External dimensions - mm | | | | |
| width | 867 | 867 | 867 | 867 |
| depth | 775 | 775 | 775 | 775 |
| height | 1058 | 1058 | 1058 | 1058 |
| Electric power - kW | 19 | 19 | 19 | 19 |
| Electric amperage - A | 28,3 | 28,3 | 28,3 | 49,5 |
| Electrical connection | 380-415V 3N 50/60 Hz | 380-415V 3N 50/60 Hz | 380-415V 3N 50/60 Hz | 220-240V 3N 50/60 Hz |
| Boiler AISI 316L | | • | | |

SkyLine Premium Combi Boiler Oven

Digital 10GN2/1 electric



| | 217823 | 217853 | 217813 |
|--------------------------|-------------------------|-------------------------|-------------------------|
| Number of grids | 10 | 10 | 10 |
| Runner pitch - mm | 67 | 67 | 67 |
| External dimensions - mm | | | |
| width | 1090 | 1090 | 1090 |
| depth | 971 | 971 | 971 |
| height | 1058 | 1058 | 1058 |
| Electric power - kW | 37,4 | 37,4 | 37,4 |
| Electric amperage - A | 55,8 | 55,8 | 97,6 |
| Electrical connection | 380-415V 3N 50/60 Hz | 380-415V 3N 50/60 Hz | 220-240V 3N 50/60 Hz |
| Boiler AISI 316L | | • | |

SkyLine Premium Combi Boiler Oven

Digital 20GN1/1 electric



| | 217824 | 217854 | 217804 | 217814 |
|--------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| Number of grids | 20 | 20 | 16 | 20 |
| Runner pitch - mm | 63 | 63 | 84 | 63 |
| External dimensions - mm | | | | |
| width | 911 | 911 | 911 | 911 |
| depth | 865 | 865 | 865 | 865 |
| height | 1794 | 1794 | 1794 | 1794 |
| Electric power - kW | 37,7 | 37,7 | 37,7 | 37,7 |
| Electric amperage - A | 56,2 | 56,2 | 56,2 | 98,3 |
| Electrical connection | 380-415V 3N 50/60 Hz | 380-415V 3N 50/60 Hz | 380-415V 3N 50/60 Hz | 220-240V 3N 50/60 Hz |
| Boiler AISI 316L | | • | | |

SkyLine Premium Combi Boiler Oven

Digital 20GN2/1 electric



| | 217825 | 217855 | 217815 |
|--------------------------|-------------------------|-------------------------|-------------------------|
| Number of grids | 20 | 20 | 20 |
| Runner pitch - mm | 63 | 63 | 63 |
| External dimensions - mm | | | |
| width | 1162 | 1162 | 1162 |
| depth | 1067 | 1067 | 1067 |
| height | 1794 | 1794 | 1794 |
| Electric power - kW | 65,4 | 65,4 | 65,4 |
| Electric amperage - A | 97,6 | 97,6 | 170,8 |
| Electrical connection | 380-415V 3N 50/60 Hz | 380-415V 3N 50/60 Hz | 220-240V 3N 50/60 Hz |
| Boiler AISI 316L | | • | |

SkyLine Premium Combi Boiler Oven

Digital 6GN1/1 gas



| | 217880 | 225860 | 217890 | 217860 |
|--------------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| Number of grids | 6 | 6 | 6 | 6 |
| Runner pitch - mm | 67 | 67 | 67 | 67 |
| External dimensions - mm | | | | |
| width | 867 | 867 | 867 | 867 |
| depth | 775 | 775 | 775 | 775 |
| height | 808 | 808 | 808 | 808 |
| Gas power - kW | 19 | 19 | 19 | 19 |
| Electric power - kW | 1,1 | 1,1 | 1,1 | 1,1 |
| Electric amperage - A | 5 | 5 | 5 | 5 |
| Electrical connection | 220-240 V 1N 50 Hz | 220-240 V 1N 60 Hz | 220-240 V 1N 50 Hz | 220-240 V 1N 50 Hz |
| Boiler AISI 316L | | | • | |
| LPG gas | | | | • |

SkyLine Premium Combi Boiler Oven

Digital 6GN2/1 gas



| | 217881 | 225861 | 217891 | 217861 |
|--------------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| Number of grids | 6 | 6 | 6 | 6 |
| Runner pitch - mm | 67 | 67 | 67 | 67 |
| External dimensions - mm | | | | |
| width | 1090 | 1090 | 1090 | 1090 |
| depth | 971 | 971 | 971 | 971 |
| height | 808 | 808 | 808 | 808 |
| Gas power - kW | 32 | 32 | 32 | 32 |
| Electric power - kW | 1,5 | 1,5 | 1,5 | 1,5 |
| Electric amperage - A | 6,8 | 6,8 | 6,8 | 6,8 |
| Electrical connection | 220-240 V 1N 50 Hz | 220-240 V 1N 60 Hz | 220-240 V 1N 50 Hz | 220-240 V 1N 50 Hz |
| Boiler AISI 316L | | | • | |
| LPG gas | | | | • |

SkyLine Premium Combi Boiler Oven

Digital 10GN1/1 gas



| | 217882 | 225862 | 217892 | 217862 |
|--------------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| Number of grids | 10 | 10 | 10 | 10 |
| Runner pitch - mm | 67 | 67 | 67 | 85 |
| External dimensions - mm | | | | |
| width | 867 | 867 | 867 | 867 |
| depth | 775 | 775 | 775 | 775 |
| height | 1058 | 1058 | 1058 | 1058 |
| Gas power - kW | 31 | 31 | 31 | 31 |
| Electric power - kW | 1,1 | 1,1 | 1,1 | 1,1 |
| Electric amperage - A | 5 | 5 | 5 | 5 |
| Electrical connection | 220-240 V 1N 50 Hz | 220-240 V 1N 60 Hz | 220-240 V 1N 50 Hz | 220-240 V 1N 50 Hz |
| Boiler AISI 316L | | | • | |
| LPG gas | | | | • |

SkyLine Premium Combi Boiler Oven

Digital 10GN2/1 gas



| | 217883 | 225863 | 217893 | 217863 |
|--------------------------|----------------------|----------------------|----------------------|----------------------|
| Number of grids | 10 | 10 | 10 | 10 |
| Runner pitch - mm | 67 | 67 | 67 | 67 |
| External dimensions - mm | | | | |
| width | 1090 | 1090 | 1090 | 1090 |
| depth | 971 | 971 | 971 | 971 |
| height | 1058 | 1058 | 1058 | 1058 |
| Gas power - kW | 47 | 47 | 47 | 47 |
| Electric power - kW | 1,5 | 1,5 | 1,5 | 1,5 |
| Electric amperage - A | 6,8 | 6,8 | 6,8 | 6,8 |
| Electrical connection | 220-240V 1N 50 Hz | 220-240V 1N 60 Hz | 220-240V 1N 50 Hz | 220-240V 1N 50 Hz |
| Boiler AISI 316L | | | • | |
| LPG gas | | | | • |

SkyLine Premium Combi Boiler Oven

Digital 20GN1/1 gas



| | 217884 | 225864 | 217894 | 217864 |
|--------------------------|----------------------|----------------------|----------------------|----------------------|
| Number of grids | 20 | 20 | 20 | 20 |
| Runner pitch - mm | 63 | 63 | 63 | 84 |
| External dimensions - mm | | | | |
| width | 911 | 911 | 911 | 911 |
| depth | 865 | 865 | 865 | 865 |
| height | 1794 | 1794 | 1794 | 1794 |
| Gas power - kW | 54 | 54 | 54 | 54 |
| Electric power - kW | 1,8 | 1,8 | 1,8 | 1,8 |
| Electric amperage - A | 8,1 | 8,1 | 8,1 | 8,1 |
| Electrical connection | 220-240V 1N 50 Hz | 220-240V 1N 60 Hz | 220-240V 1N 50 Hz | 220-240V 1N 50 Hz |
| Boiler AISI 316L | | | • | |

SkyLine Premium Combi Boiler Oven

Digital 20GN2/1 gas



| | 217885 | 225865 | 217895 | 217865 |
|--------------------------|----------------------|----------------------|----------------------|----------------------|
| Number of grids | 20 | 20 | 20 | 20 |
| Runner pitch - mm | 63 | 63 | 63 | 63 |
| External dimensions - mm | | | | |
| width | 1162 | 1162 | 1162 | 1162 |
| depth | 1067 | 1067 | 1067 | 1067 |
| height | 1794 | 1794 | 1794 | 1794 |
| Gas power - kW | 100 | 100 | 100 | 100 |
| Electric power - kW | 2,5 | 2,5 | 2,5 | 2,5 |
| Electric amperage - A | 11,3 | 11,3 | 10,4 | 11,3 |
| Electrical connection | 220-240V 1N 50 Hz | 220-240V 1N 60 Hz | 220-240V 1N 50 Hz | 220-240V 1N 50 Hz |
| Boiler AISI 316L | | | • | |

SkyLine Pro^S

Touch panel

Steam injection



Program mode

Save, organize into categories, and share up to **1.000 recipes** via USB or OnE connectivity.



OptiFlow

Perfect, even cooking results thanks to revolutionary high-tech **OptiFlow** air distribution system which guarantees uniform heat distribution.



Food core temperature control probe

Exact temperature reading with single sensor probe and for extra precision choose the optional **6-sensor probe**.



Lambda sensor (optional)

Precise real-time measurement and control over humidity in the Oven chamber for every type of food and size of load.



Advanced features

Simplify your life and make your workflow leaner by personalizing your **SkyHub homepage** with your favorite functions. Use **MyPlanner** to plan your daily work and receive personalized alerts for your tasks.



SkyClean

Flawless cleaning results, **green functions**. Flexible choice of 3 different chemicals to serve you better: **solid, liquid or 85% biodegradable enzymatic**.



Touch panel

Super-intuitive, simple-to-learn and -use touch screen interface designed to make life easy. Adapted for color blindness. Available in over 30 different languages.



11 humidity levels

Add variety to your cooking with **11 humidity levels** and high efficiency instant steam with automatic exhaust valve opening for extra crispy food.



OnE connectivity ready

SkyLine Pro^S connectivity gives real time access to your appliance from any smart device.



SkyLine Pro^s Combi Boilerless Oven

Touch 6GN1/1 electric



| | 217620 | 217600 | 217610 | 227650 |
|--------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| Number of grids | 6 | 5 | 6 | 5 |
| Runner pitch - mm | 67 | 85 | 67 | 80 |
| External dimensions - mm | | | | |
| width | 867 | 867 | 867 | 867 |
| depth | 775 | 775 | 775 | 775 |
| height | 808 | 808 | 808 | 808 |
| Electric power - kW | 11 | 11 | 11 | 11 |
| Electric amperage - A | 16,3 | 16,3 | 28,6 | 16,3 |
| Electrical connection | 380-415V 3N 50/60 Hz | 380-415V 3N 50/60 Hz | 220-240V 3N 50/60 Hz | 380-415V 3N 50/60 Hz |
| Bakery (400x600 mm) | | | | • |

SkyLine Pro^s Combi Boilerless Oven

Touch 6GN2/1 electric



| | 217621 | 217611 |
|--------------------------|-------------------------|-------------------------|
| Number of grids | 6 | 6 |
| Runner pitch - mm | 67 | 67 |
| External dimensions - mm | | |
| width | 1090 | 1090 |
| depth | 971 | 971 |
| height | 808 | 808 |
| Electric power - kW | 21,4 | 21,4 |
| Electric amperage - A | 31,9 | 55,7 |
| Electrical connection | 380-415V 3N 50/60 Hz | 220-240V 3N 50/60 Hz |

SkyLine Pro^S Combi Boilerless Oven

Touch 10GN1/1 electric



| | 217622 | 217602 | 217612 | 227652 |
|--------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| Number of grids | 10 | 8 | 10 | 8 |
| Runner pitch - mm | 67 | 85 | 67 | 80 |
| External dimensions - mm | | | | |
| width | 867 | 867 | 867 | 867 |
| depth | 775 | 775 | 775 | 775 |
| height | 1058 | 1058 | 1058 | 1058 |
| Electric power - kW | 19 | 19 | 19 | 19 |
| Electric amperage - A | 28,3 | 28,3 | 49,5 | 28,3 |
| Electrical connection | 380-415V 3N 50/60 Hz | 380-415V 3N 50/60 Hz | 220-240V 3N 50/60 Hz | 380-415V 3N 50/60 Hz |
| Bakery (400x600 mm) | | | | • |

SkyLine Pro^S Combi Boilerless Oven

Touch 10GN2/1 electric



| | 217623 | 217613 |
|--------------------------|-------------------------|-------------------------|
| Number of grids | 10 | 10 |
| Runner pitch - mm | 67 | 67 |
| External dimensions - mm | | |
| width | 1090 | 1090 |
| depth | 971 | 971 |
| height | 1058 | 1058 |
| Electric power - kW | 35,4 | 35,4 |
| Electric amperage - A | 52,4 | 92,4 |
| Electrical connection | 380-415V 3N 50/60 Hz | 220-240V 3N 50/60 Hz |

SkyLine Pro^S Combi Boilerless Oven

Touch 20GN1/1 electric



| | 217624 | 237524 | 217604 | 217614 |
|--------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| Number of grids | 20 | 16 | 16 | 20 |
| Runner pitch - mm | 63 | 80 | 84 | 63 |
| External dimensions - mm | | | | |
| width | 911 | 911 | 911 | 911 |
| depth | 865 | 865 | 865 | 865 |
| height | 1794 | 1794 | 1794 | 1794 |
| Electric power - kW | 37,7 | 37,7 | 37,7 | 37,7 |
| Electric amperage - A | 56,2 | 56,2 | 56,2 | 98,3 |
| Electrical connection | 380-415V 3N 50/60 Hz | 380-415V 3N 50/60 Hz | 380-415V 3N 50/60 Hz | 220-240V 3N 50/60 Hz |
| Bakery (400x600 mm) | | • | | |

SkyLine Pro^S Combi Boilerless Oven

Touch 20GN2/1 electric



| | 217625 | 217615 |
|--------------------------|-------------------------|-------------------------|
| Number of grids | 20 | 20 |
| Runner pitch - mm | 63 | 63 |
| External dimensions - mm | | |
| width | 1162 | 1162 |
| depth | 1067 | 1067 |
| height | 1794 | 1794 |
| Electric power - kW | 65,4 | 65,4 |
| Electric amperage - A | 97,6 | 170,8 |
| Electrical connection | 380-415V 3N 50/60 Hz | 220-240V 3N 50/60 Hz |

SkyLine Pro^s Combi Boilerless Oven

Touch 6GN1/1 gas



| | 217680 | 225660 | 217660 | 227680 |
|--------------------------|----------------------|----------------------|----------------------|----------------------|
| Number of grids | 6 | 6 | 6 | 5 |
| Runner pitch - mm | 67 | 67 | 67 | 80 |
| External dimensions - mm | | | | |
| width | 867 | 867 | 867 | 867 |
| depth | 775 | 775 | 775 | 775 |
| height | 808 | 808 | 808 | 808 |
| Gas power - kW | 12 | 12 | 12 | 12 |
| Electric power - kW | 1,1 | 1,1 | 1,1 | 1,1 |
| Electric amperage - A | 5 | 5 | 5 | 5 |
| Electrical connection | 220-240V 1N 50 Hz | 220-240V 1N 60 Hz | 220-240V 1N 50 Hz | 220-240V 1N 50 Hz |
| Bakery (400x600 mm) | | | | • |
| LPG gas | | | • | |

SkyLine Pro^s Combi Boilerless Oven

Touch 6GN2/1 gas



| | 217681 | 225661 | 217661 |
|--------------------------|----------------------|----------------------|----------------------|
| Number of grids | 6 | 6 | 6 |
| Runner pitch - mm | 67 | 67 | 67 |
| External dimensions - mm | | | |
| width | 1090 | 1090 | 1090 |
| depth | 971 | 971 | 971 |
| height | 808 | 808 | 808 |
| Gas power - kW | 24 | 24 | 24 |
| Electric power - kW | 1,5 | 1,5 | 1,5 |
| Electric amperage - A | 6,8 | 6,8 | 6,8 |
| Electrical connection | 220-240V 1N 50 Hz | 220-240V 1N 60 Hz | 220-240V 1N 50 Hz |
| LPG gas | | | • |

SkyLine Pro^s Combi Boilerless Oven

Touch 10GN1/1 gas



| | 217682 | 225662 | 217662 | 227682 |
|--------------------------|----------------------|----------------------|----------------------|----------------------|
| Number of grids | 10 | 10 | 10 | 8 |
| Runner pitch - mm | 67 | 67 | 67 | 80 |
| External dimensions - mm | | | | |
| width | 867 | 867 | 867 | 867 |
| depth | 775 | 775 | 775 | 775 |
| height | 1058 | 1058 | 1058 | 1058 |
| Gas power - kW | 21 | 21 | 21 | 21 |
| Electric power - kW | 1,1 | 1,1 | 1,1 | 1,1 |
| Electric amperage - A | 5 | 5 | 5 | 5 |
| Electrical connection | 220-240V 1N 50 Hz | 220-240V 1N 60 Hz | 220-240V 1N 50 Hz | 220-240V 1N 50 Hz |
| Bakery (400x600 mm) | | | | • |
| LPG gas | | | • | |

SkyLine Pro^s Combi Boilerless Oven

Touch 10GN2/1 gas



| | 217683 | 225663 | 217663 |
|--------------------------|----------------------|----------------------|----------------------|
| Number of grids | 10 | 10 | 10 |
| Runner pitch - mm | 67 | 67 | 67 |
| External dimensions - mm | | | |
| width | 1090 | 1090 | 1090 |
| depth | 971 | 971 | 971 |
| height | 1058 | 1058 | 1058 |
| Gas power - kW | 35 | 35 | 35 |
| Electric power - kW | 1,5 | 1,5 | 1,5 |
| Electric amperage - A | 6,8 | 6,8 | 6,8 |
| Electrical connection | 220-240V 1N 50 Hz | 220-240V 1N 60 Hz | 220-240V 1N 50 Hz |
| LPG gas | | | • |

SkyLine Pro^s Combi Boilerless Oven

Touch 20GN1/1 gas



| | 217684 | 225664 | 217664 | 237534 |
|--------------------------|----------------------|----------------------|----------------------|----------------------|
| Number of grids | 20 | 20 | 20 | 16 |
| Runner pitch - mm | 63 | 63 | 63 | 80 |
| External dimensions - mm | | | | |
| width | 911 | 911 | 911 | 911 |
| depth | 865 | 865 | 865 | 865 |
| height | 1794 | 1794 | 1794 | 1794 |
| Gas power - kW | 42 | 42 | 42 | 42 |
| Electric power - kW | 1,8 | 1,8 | 1,8 | 1,8 |
| Electric amperage - A | 8,1 | 8,1 | 8,1 | 8,1 |
| Electrical connection | 220-240V 1N 50 Hz | 220-240V 1N 60 Hz | 220-240V 1N 50 Hz | 220-240V 1N 50 Hz |
| Bakery (400x600 mm) | | | | • |
| LPG gas | | | • | |

SkyLine Pro^s Combi Boilerless Oven

Touch 20GN2/1 gas



| | 217685 | 225665 | 217665 |
|--------------------------|----------------------|----------------------|----------------------|
| Number of grids | 20 | 20 | 20 |
| Runner pitch - mm | 63 | 63 | 63 |
| External dimensions - mm | | | |
| width | 1162 | 1162 | 1162 |
| depth | 1067 | 1067 | 1067 |
| height | 1794 | 1794 | 1794 |
| Gas power - kW | 70 | 70 | 70 |
| Electric power - kW | 2,5 | 2,5 | 2,5 |
| Electric amperage - A | 11,3 | 11,3 | 11,3 |
| Electrical connection | 220-240V 1N 50 Hz | 220-240V 1N 60 Hz | 220-240V 1N 50 Hz |
| LPG gas | | | • |

SkyLine Pro

Digital panel

Steam injection



Program mode

Save and share your programs via USB or OnE connectivity. 100 free programs and 4 cooking phases.



OptiFlow

Perfect, even cooking results thanks to revolutionary high-tech **OptiFlow** air distribution system which guarantees uniform heat distribution.



Food core temperature control probe

Exact temperature reading with single sensor probe and for extra precision choose the optional **6-sensor probe**.



Lambda sensor (optional)

Precise real-time measurement and control over humidity in the Oven chamber for every type of food and size of load.



SkyClean

Flawless cleaning results. Flexible choice of 3 different chemicals to serve you better: **solid, liquid or 85% biodegradable enzymatic**.



Digital panel

Digital panel with unique light-guided selection simplifies every task.




11 humidity levels

Add variety to your cooking with **11 humidity levels** and high efficiency instant steam with automatic exhaust valve opening for extra crispy food.



OnE connectivity ready

SkyLine Pro connectivity gives real time access to your appliance from any smart device.

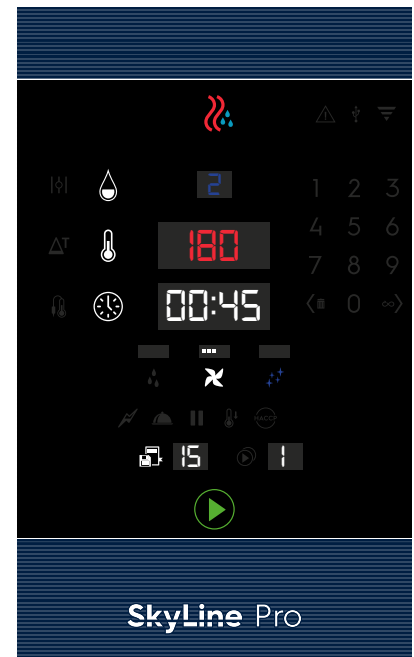

SkyLine Pro Combi Boilerless Oven

Digital 6GN1/1 electric



| | 217920 | 217900 | 217910 | 227950 |
|--------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| Number of grids | 6 | 5 | 6 | 5 |
| Runner pitch - mm | 67 | 85 | 67 | 80 |
| External dimensions - mm | | | | |
| width | 867 | 867 | 867 | 867 |
| depth | 775 | 775 | 775 | 775 |
| height | 808 | 808 | 808 | 808 |
| Electric power - kW | 11 | 11 | 11 | 11 |
| Electric amperage - A | 16,3 | 16,3 | 28,6 | 16,3 |
| Electrical connection | 380-415V 3N 50/60 Hz | 380-415V 3N 50/60 Hz | 220-240V 3N 50/60 Hz | 380-415V 3N 50/60 Hz |
| Bakery (400x600 mm) | | | | • |

SkyLine Pro Combi Boilerless Oven

Digital 6GN2/1 electric



| | 217921 | 217911 |
|--------------------------|-------------------------|-------------------------|
| Number of grids | 6 | 6 |
| Runner pitch - mm | 67 | 67 |
| External dimensions - mm | | |
| width | 1090 | 1090 |
| depth | 971 | 971 |
| height | 808 | 808 |
| Electric power - kW | 21,4 | 21,4 |
| Electric amperage - A | 31,9 | 55,7 |
| Electrical connection | 380-415V 3N 50/60 Hz | 220-240V 3N 50/60 Hz |

SkyLine Pro Combi Boilerless Oven

Digital 10GN1/1 electric



| | 217922 | 217902 | 217912 | 227952 |
|--------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| Number of grids | 10 | 10 | 10 | 8 |
| Runner pitch - mm | 67 | 85 | 67 | 80 |
| External dimensions - mm | | | | |
| width | 867 | 867 | 867 | 867 |
| depth | 775 | 775 | 775 | 775 |
| height | 1058 | 1058 | 1058 | 1058 |
| Electric power - kW | 19 | 19 | 19 | 19 |
| Electric amperage - A | 28,3 | 28,3 | 49,5 | 28,3 |
| Electrical connection | 380-415V 3N 50/60 Hz | 380-415V 3N 50/60 Hz | 220-240V 3N 50/60 Hz | 380-415V 3N 50/60 Hz |
| Bakery (400x600 mm) | | | | • |

SkyLine Pro Combi Boilerless Oven

Digital 10GN2/1 electric



| | 217923 | 217913 |
|--------------------------|-------------------------|-------------------------|
| Number of grids | 10 | 10 |
| Runner pitch - mm | 67 | 67 |
| External dimensions - mm | | |
| width | 1090 | 1090 |
| depth | 971 | 971 |
| height | 1058 | 1058 |
| Electric power - kW | 35,4 | 35,4 |
| Electric amperage - A | 52,8 | 92,4 |
| Electrical connection | 380-415V 3N 50/60 Hz | 220-240V 3N 50/60 Hz |

SkyLine Pro Combi Boilerless Oven

Digital 20GN1/1 electric



| | 217924 | 237724 | 217904 | 217914 |
|--------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| Number of grids | 20 | 16 | 16 | 20 |
| Runner pitch - mm | 63 | 80 | 84 | 63 |
| External dimensions - mm | | | | |
| width | 911 | 911 | 911 | 911 |
| depth | 865 | 865 | 865 | 865 |
| height | 1794 | 1794 | 1794 | 1794 |
| Electric power - kW | 37,7 | 37,7 | 37,7 | 37,7 |
| Electric amperage - A | 56,4 | 56,4 | 56,4 | 98,3 |
| Electrical connection | 380-415V 3N 50/60 Hz | 380-415V 3N 50/60 Hz | 380-415V 3N 50/60 Hz | 220-240V 3N 50/60 Hz |
| Bakery (400x600 mm) | | • | | |

SkyLine Pro Combi Boilerless Oven

Digital 20GN2/1 electric



| | 217925 | 217915 |
|--------------------------|-------------------------|-------------------------|
| Number of grids | 20 | 20 |
| Runner pitch - mm | 63 | 63 |
| External dimensions - mm | | |
| width | 1162 | 1162 |
| depth | 1067 | 1067 |
| height | 1794 | 1794 |
| Electric power - kW | 65.4 | 65.4 |
| Electric amperage - A | 97,6 | 170,8 |
| Electrical connection | 380-415V 3N 50/60 Hz | 220-240V 3N 50/60 Hz |

SkyLine Pro Combi Boilerless Oven

Digital 6GN1/1 gas



| | 217980 | 225960 | 217960 | 227980 |
|--------------------------|----------------------|----------------------|----------------------|----------------------|
| Number of grids | 6 | 6 | 6 | 5 |
| Runner pitch - mm | 67 | 67 | 67 | 80 |
| External dimensions - mm | | | | |
| width | 867 | 867 | 867 | 867 |
| depth | 775 | 775 | 775 | 775 |
| height | 808 | 808 | 808 | 808 |
| Gas power - kW | 19 | 19 | 19 | 19 |
| Electric power - kW | 1,1 | 1,1 | 1,1 | 1,1 |
| Electric amperage - A | 5 | 5 | 5 | 5 |
| Electrical connection | 220-240V 1N 50 Hz | 220-240V 1N 60 Hz | 220-240V 1N 50 Hz | 220-240V 1N 50 Hz |
| Bakery (400x600 mm) | | | | • |
| LPG gas | | | • | |

SkyLine Pro Combi Boilerless Oven

Digital 6GN2/1 gas



| | 217981 | 225961 | 217961 |
|--------------------------|----------------------|----------------------|----------------------|
| Number of grids | 6 | 6 | 6 |
| Runner pitch - mm | 67 | 67 | 67 |
| External dimensions - mm | | | |
| width | 1090 | 1090 | 1090 |
| depth | 971 | 971 | 971 |
| height | 808 | 808 | 808 |
| Gas power - kW | 32 | 32 | 32 |
| Electric power - kW | 1,5 | 1,5 | 1,5 |
| Electric amperage - A | 6,8 | 6,8 | 6,8 |
| Electrical connection | 220-240V 1N 50 Hz | 220-240V 1N 60 Hz | 220-240V 1N 50 Hz |
| LPG gas | | | • |

SkyLine Pro Combi Boilerless Oven

Digital 10GN1/1 gas



| | 217982 | 225962 | 217962 | 227982 |
|--------------------------|----------------------|----------------------|----------------------|----------------------|
| Number of grids | 10 | 10 | 10 | 8 |
| Runner pitch - mm | 67 | 67 | 67 | 80 |
| External dimensions - mm | | | | |
| width | 867 | 867 | 867 | 867 |
| depth | 775 | 775 | 775 | 775 |
| height | 1058 | 1058 | 1058 | 1058 |
| Gas power - kW | 31 | 31 | 31 | 31 |
| Electric power - kW | 1,1 | 1,1 | 1,1 | 1,1 |
| Electric amperage - A | 5 | 5 | 5 | 5 |
| Electrical connection | 220-240V 1N 50 Hz | 220-240V 1N 60 Hz | 220-240V 1N 50 Hz | 220-240V 1N 50 Hz |
| Bakery (400x600 mm) | | | | • |
| LPG gas | | | • | |

SkyLine Pro Combi Boilerless Oven

Digital 10GN2/1 gas



| | 217983 | 225963 | 217963 |
|--------------------------|----------------------|----------------------|---------------------|
| Number of grids | 10 | 10 | 10 |
| Runner pitch - mm | 67 | 67 | 67 |
| External dimensions - mm | | | |
| width | 1090 | 1090 | 1090 |
| depth | 971 | 971 | 971 |
| height | 1058 | 1058 | 1058 |
| Gas power - kW | 47 | 47 | 47 |
| Electric power - kW | 1,5 | 1,5 | 1,5 |
| Electric amperage - A | 6,8 | 6,8 | 6,8 |
| Electrical connection | 220-240V 1N 50 Hz | 220-240V 1N 60 Hz | 220-240V 1N 50Hz |
| LPG gas | | | • |

SkyLine Pro Combi Boilerless Oven

Digital 20GN1/1 gas



| | 217984 | 225964 | 217964 |
|--------------------------|----------------------|----------------------|----------------------|
| Number of grids | 20 | 20 | 20 |
| Runner pitch - mm | 63 | 63 | 63 |
| External dimensions - mm | | | |
| width | 911 | 911 | 911 |
| depth | 865 | 865 | 865 |
| height | 1794 | 1794 | 1794 |
| Gas power - kW | 54 | 54 | 54 |
| Electric power - kW | 1,8 | 1,8 | 1,8 |
| Electric amperage - A | 8,1 | 8,1 | 8,1 |
| Electrical connection | 220-240V 1N 50 Hz | 220-240V 1N 60 Hz | 220-240V 1N 50 Hz |
| LPG gas | | | • |

SkyLine Pro Combi Boilerless Oven

Digital 20GN2/1 gas



| | 217985 | 225965 | 217965 |
|--------------------------|----------------------|----------------------|----------------------|
| Number of grids | 20 | 20 | 20 |
| Runner pitch - mm | 63 | 63 | 63 |
| External dimensions - mm | | | |
| width | 1162 | 1162 | 1162 |
| depth | 1067 | 1067 | 1067 |
| height | 1794 | 1794 | 1794 |
| Gas power - kW | 100 | 100 | 100 |
| Electric power - kW | 2,5 | 2,5 | 2,5 |
| Electric amperage - A | 11,3 | 11,3 | 11,3 |
| Electrical connection | 220-240V 1N 50 Hz | 220-240V 1N 60 Hz | 220-240V 1N 50 Hz |
| LPG gas | | | • |

SkyLine Chill^S

Touch panel



Program mode

Save, organize into categories, and share up to **1000 recipes** via USB or OnE connectivity.



OptiFlow

Flexible, even results whether chilling and freezing thanks to revolutionary high technology design **OptiFlow** air distribution system which guarantees perfect evenness.



6-sensor probe as optional

Extra precise measurement of the exact core temperature of your food. 3-sensor probe as standard.



for 6-sensor probe



ARTE 2.0

Keep their business safe. ARTE 2.0 estimates time remaining on probe-driven cycles based on artificial intelligence technology.



Turbo Cooling

Non-stop chilling for busy kitchens and patisseries. Simply set a working temperature between +10° and -41° C and **SkyLine Chill^S** maintains the set temperature over time.



Advanced features

Simplify your life and make your workflow leaner by personalizing your **SkyHub homepage** with your favorite functions. Use **MyPlanner** to plan your daily work and receive personalized alerts for your tasks.



for MyPlanner



An extra effortless benefit

Stress-free efficiency and productivity with **SkyDuo**. Anticipating your needs with the self-intuitive connection between SkyLine Premium^S Ovens and SkyLine Chill^S and viceversa. The appliances guide you through the Cook&Chill process.



Touch panel

Super-intuitive, simple-to-learn and -use and customizable touch screen interface designed to make life easy. Color-blind friendly. Available in over 30 different languages.



OnE connectivity ready


SkyLine Chill^S connectivity gives real time access to your appliance from any smart device.



Automatic mode

Simple and fast to use automatic cycles with 10 families and 9 new **special chilling Cycles***.

Low on space? **SkyLine Chill^S** offers 4 special **LiteHot cycles** too: Chocolate, Proving, Retarded Proving and Fast Thawing.

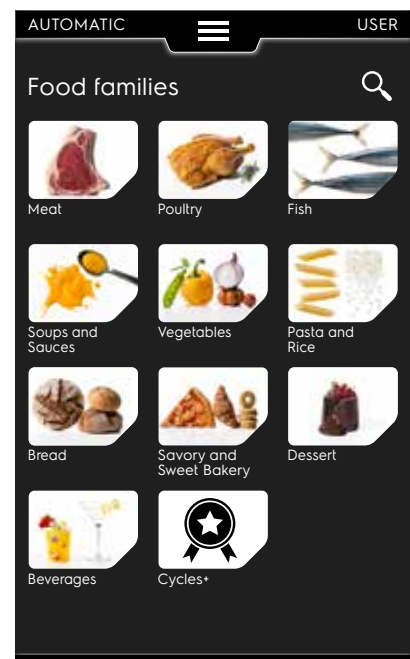

SkyLine Chill^s

30/30 kg - 6GN1/1



| | 727730 | 727905 | 727729 | 727906 | 727733 | 727783 |
|--------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|
| Model | Chiller/ Freezer | Chiller/ Freezer | Chiller/ Freezer | Chiller/ Freezer | Chiller/ Freezer | Chiller/ Freezer |
| Capacity - kg | 30/30 | 30/30 | 30/30 | 30/30 | 30/30 | 30/30 |
| Grid type | GN 1/1 400x600 mm Ice cream | GN 1/1 400x600 mm Ice cream | GN 1/1 400x600 mm Ice cream | GN 1/1 400x600 mm Ice cream | GN 1/1 400x600 mm Ice cream | GN 1/1 400x600 mm Ice cream |
| Number of positions | 12 | 12 | 12 | 12 | 12 | 12 |
| Runner pitch - mm | 30 | 30 | 30 | 30 | 30 | 30 |
| External dimensions - mm | | | | | | |
| width | 897 | 897 | 897 | 897 | 897 | 897 |
| depth | 937 | 937 | 937 | 937 | 937 | 937 |
| height | 1060 | 1060 | 1020 | 1020 | 1060 | 1060 |
| Refrigeration unit | Built-in | Built-in | Built-in | Built-in | Remote | Built-in |
| Refrigerant type | R452a | R452a | R452a | R452a | R452a | R452a |
| Electric power - kW | 2,7 | 2,7 | 2,7 | 2,7 | 0,97 | 2,7 |
| Electric amperage - A | 6,3 | 6,3 | 6,3 | 6,3 | 4,4 | 6,3 |
| Electrical connection | 380-415V 3N 50Hz | 380-415V 3N 50Hz | 380-415V 3N 50Hz | 380-415V 3N 50Hz | 220-240V 1N 50/60Hz | 380-415V 3N 50Hz |
| Tower execution | | | • | | | |
| UV lamp | | | | | | • |
| Left-hinged door | | • | | • | | |

SkyLine Chill^s

50/50 kg - 10GN1/1



| | 727736 | 727907 | 727737 | 727734 |
|-----------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|
| Model | Chiller/ Freezer | Chiller/ Freezer | Chiller/ Freezer | Chiller/ Freezer |
| Capacity - kg | 50/50 | 50/50 | 50/50 | 50/50 |
| Grid type | GN 1/1 400x600 mm Ice cream | GN 1/1 400x600 mm Ice cream | GN 1/1 400x600 mm Ice cream | GN 1/1 400x600 mm Ice cream |
| Number of positions | 29 | 29 | 29 | 29 |
| Runner pitch - mm | 30 | 30 | 30 | 30 |
| External dimensions - mm | | | | |
| width | 895 | 895 | 895 | 895 |
| depth | 939 | 939 | 939 | 939 |
| height | 1731 | 1731 | 1731 | 1731 |
| Refrigeration unit | Built-in | Built-in | Remote | Built-in |
| Refrigerant type | R452a | R452a | R452a | R452a |
| Electric power - kW | 4,15 | 4,15 | 0,19 | 4,15 |
| Electric amperage - A | 8,4 | 8,4 | 8,6 | 8,4 |
| Electrical connection | 380-415V 3N 50Hz | 380-415V 3N 50Hz | 220-240V 1N 50/60Hz | 380-415V 3N 50Hz |
| UV lamp | | | | • |
| Right-hinged door | | • | | |

SkyLine Chill^s

100/70 kg - 10GN2/1



| | 727740 | 727908 | 727741 | 727876 |
|--------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|
| Model | Chiller/ Freezer | Chiller/ Freezer | Chiller/ Freezer | Chiller/ Freezer |
| Capacity - kg | 100/70 | 100/70 | 100/70 | 100/70 |
| Grid type | GN 2/1 400x600 mm Ice cream | GN 2/1 400x600 mm Ice cream | GN 2/1 400x600 mm Ice cream | GN 2/1 400x600 mm Ice cream |
| Number of positions | 29 | 29 | 29 | 29 |
| Runner pitch - mm | 30 | 30 | 30 | 30 |
| External dimensions - mm | | | | |
| width | 1250 | 1250 | 1250 | 1250 |
| depth | 1092 | 1092 | 1092 | 1092 |
| height | 1730 | 1730 | 1730 | 1730 |
| Refrigeration unit | Built-in | Built-in | Remote | Built-in |
| Refrigerant type | R452a | R452a | R452a | R452a |
| Electric power - kW | 5,5 | 5,5 | 1.9 | 5,5 |
| Electric amperage - A | 11,5 | 11,5 | 8.6 | 11,5 |
| Electrical connection | 380-415V 3N 50Hz | 380-415V 3N 50Hz | 220-240V 1N 50/60Hz | 380-415V 3N 50Hz |
| Right-hinged door | | • | | |
| UV lamp | | | | • |

SkyLine Chill^s

100/85 kg - 20GN1/1



| | 727743* | 727875 |
|--------------------------|------------------------|------------------------|
| Model | Chiller/ Freezer | Chiller/ Freezer |
| Capacity - kg | 100/85 | 100/85 |
| Trolley type | GN 1/1 400x600 mm | GN 1/1 400x600 mm |
| Number of trolleys | 1 | 1 |
| External dimensions - mm | | |
| width | 1040 | 1040 |
| depth | 850 | 850 |
| height | 1741 | 1741 |
| Refrigeration unit | Remote | Remote |
| Refrigerant type | R452a | R452a |
| Electric power - kW | 0,88 | 0,88 |
| Electric amperage - A | 4,5 | 4,5 |
| Electrical connection | 380-415V 3N 50/60Hz | 380-415V 3N 50/60Hz |
| UV lamp | | • |

*Available model as Chiller only: 727822

SkyLine Chill^s

150/120 kg - 20GN2/1



| | 727762 | 727761* |
|--------------------------|----------------------|------------------------|
| Model | Chiller/ Freezer | Chiller/ Freezer |
| Capacity - kg | 150/120 | 150/120 |
| Trolley type | GN 2/1 400x600 mm | GN 2/1 400x600 mm |
| Number of trolleys | 1 | 1 |
| External dimensions - mm | | |
| width | 1400 | 1400 |
| depth | 1206 | 1266 |
| height | 2470 | 2400 |
| Refrigeration unit | Built-in | Remote |
| Refrigerant type | R452a | R452a |
| Electric power - kW | 6,51 | 2,25 |
| Electric amperage - A | 14 | 4,1 |
| Electrical connection | 380-415V 3N 50Hz | 380-415V 3N 50/60Hz |
| Roll-in | • | • |

*Available model as Chiller only: 727823

SkyLine Chill^s

200/170 kg - 20GN2/1



| | 727750 | 727755* | 727910 | 727874 | 727747 |
|--------------------------|---------------------|------------------------|------------------------|------------------------|------------------------|
| Model | Chiller/Freezer | Chiller/Freezer | Chiller/Freezer | Chiller/Freezer | Chiller/Freezer |
| Capacity - kg | 200/170 | 200/170 | 200/170 | 200/170 | 200/170 |
| Trolley type | GN 2/1 | GN 2/1 | GN 2/1 | GN 2/1 | GN 2/1 |
| Number of trolleys | 1 | 1 | 1 | 1 | 1 |
| External dimensions - mm | | | | | |
| width | 1400 | 1400 | 1400 | 1400 | 1400 |
| depth | 1266 | 1266 | 1266 | 1266 | 1266 |
| height | 2470 | 2270 | 2270 | 2270 | 2340 |
| Refrigeration unit | Built-in | Remote | Remote | Remote | Remote |
| Refrigerant type | R452a | R452a | R452a | R452a | R452a |
| Electric power - kW | 9,75 | 2,25 | 2,25 | 2,25 | 2,25 |
| Electric amperage - A | 21,2 | 4,1 | 4,1 | 4,1 | 4,1 |
| Electrical connection | 380-415V 3N 50Hz | 380-415V 3N 50/60Hz | 380-415V 3N 50/60Hz | 380-415V 3N 50/60Hz | 380-415V 3N 50-60Hz |
| Roll-in | • | • | • | • | • |
| Left-hinged door | | | • | | |
| UV lamp | | | | • | |
| Insulated floor | | | | | • |

*Available model as Chiller only: 727824

| | 727749* | 727746 | 727756 | 727757 | 727748 | 727751 |
|--------------------------|------------------------|------------------------|---------------------|------------------------|------------------------|------------------------|
| Model | Chiller/Freezer | Chiller/Freezer | Chiller/Freezer | Chiller/Freezer | Chiller/Freezer | Chiller/Freezer |
| Capacity - kg | 200/170 | 200/170 | 200/170 | 200/170 | 200/170 | 200/170 |
| Trolley type | GN 2/1 | GN 2/1 | GN 2/1 | GN 2/1 | GN 2/1 | GN 1/1 |
| Number of trolleys | 1 | 1 | 1 | 1 | 1 | 2 |
| External dimensions - mm | | | | | | |
| width | 1400 | 1400 | 1400 | 1400 | 1400 | 1800 |
| depth | 1395 | 1395 | 1266 | 1266 | 1266 | 1266 |
| height | 2270 | 2270 | 2470 | 2270 | 2340 | 2270 |
| Refrigeration unit | Remote | Remote | Built-in | Remote | Remote | Remote |
| Refrigerant type | R452a | R407a | R452a | R452a | R452a | R452a |
| Electric power - kW | 2,25 | 2,25 | 9,75 | 2,25 | 2,25 | 3,28 |
| Electric amperage - A | 4,1 | 4,1 | 21,2 | 4,1 | 4,1 | 6,5 |
| Electrical connection | 380-415V 3N 50-60Hz | 380-415V 3N 50-60Hz | 380-415V 3N 50Hz | 380-415V 3N 50-60Hz | 380-415V 3N 50-60Hz | 380-415V 3N 50-60Hz |
| Roll-in | • | • | • | • | • | • |
| Delivered disassembled | | | • | • | • | • |
| Insulated floor | | | | | • | |
| Pass-through | • | • | | | | |

*Available model as Chiller only: 727969



Excellence is central to everything we do.
By anticipating our customers' needs, we strive for
Excellence with our people, innovations, solutions and services.
To be the OnE making our customers' work-life easier,
more profitable - and truly sustainable every day.

Follow us on



professional.electrolux.com

Excellence with the environment in mind

- ▶ All our factories are ISO 14001-certified
- ▶ All our solutions are designed for low consumption of water, energy, detergents and harmful emissions
- ▶ In recent years over 70% of our product features have been updated with the environmental needs of our customers in mind
- ▶ Our technology is ROHS and REACH compliant and over 95% recyclable
- ▶ Our products are 100% quality tested by experts

