

Modular Cooking Range Line 700XP 4-Burner Gas Range on Gas Oven



371403 (E7AAKTBBMEI)

4-Burner (5,5 kW each) gas Range on gas Oven (6 kW), O Mark

Short Form Specification

Item No.

To be installed on stainless steel feet with height adjustment up to 50 mm. High efficiency flower flame burners with flame regulator and protected pilot light. Flame failure device as standard on burners to protect against accidental extinguishing. Stainless steel oven chamber with 3 levels of runners to accomodate 2/1 GN shelves (2 steam pans). Ribbed oven base plate. Exterior panels in stainless steel with Scotch Brite finish. Pan supports in heavy duty cast iron. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Main Features

- Unit to have stainless steel feet with height adjustment up to 50 mm.
- The four 5.5 kW high efficiency flower flame burners allow the flame to adapt to different size pans.
- Gas appliance supplied for use with natural or LPG gas, conversion jets supplied as standard.
- Large sized pan support in cast iron (stainless steel as option) with long center fins to allow the use of the largest down to the smallest pans.
- Pan supports in cast iron are washable in a dishwasher.
- Burners to feature flame regulator.
- Flame failure device on each burner protects against gas leakage when accidental extinguishing of the flame occurs.
- Protected pilot light.
- Base compartment consists of a gas heated standard oven with stainless steel burners and self stabilizing flame positioned beneath the base plate. Stainless steel oven chamber to have 3 levels of runners to accomodate 2/1 GN shelves (2 steam pans) and ribbed enamelled steel base plate.
- Oven thermostat adjustable from 110 °C to 270 °C.
- Double skinned door with pressed internal panel for heat insulation.
- IPx4 water protection.
- Control knobs provide smooth, continuous rotation from min to max power level.

Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Q Mark model delivered with nozzles for G30-50 mbar.

Included Accessories

• 1 of GN2/1 chrome grid for PNC 164250 static oven

Optional Accessories

GN2/1 chrome grid for static oven
 Junction sealing kit
 Draught diverter, 150 mm diameter
 PNC 164250 □
 PNC 206086 □
 PNC 206132 □

APPROVAL:






Modular Cooking Range Line 700XP 4-Burner Gas Range on Gas Oven

 Matching ring for flue condenser, 150 mm diameter 	PNC 206133	Kit town gas nozzles (G150) for 700 gas range	PNC 206387	
Kit 4 wheels - 2 swivelling with brake - it is mandatory to install	PNC 206135	• Chimney grid net, 500mm (700XP/900)	PNC 206402	
Base support and wheels • Flanged feet kit	PNC 206136	• Kit G.25.3 (NI) gas nozzles for 700 top and - freestanding on oven -	PNC 206460	
 Frontal kicking strip for concrete installation, 800mm 	PNC 206148	gas cookers • 2 side covering panels for free	PNC 216000	
Frontal kicking strip for concrete installation, 1000mm	PNC 206150	standing appliances • Frontal handrail, 800mm	PNC 216047	_
Frontal kicking strip for concrete installation, 1200mm	PNC 206151	 Frontal handrail, 1200mm Frontal handrail, 1600mm 	PNC 216049 PNC 216050	_ _
Frontal kicking strip for concrete installation, 1600mm	PNC 206152	Large handrail - portioning shelf, 800mm	PNC 216186	
 Frontal kicking strip, 800mm (not for refr-freezer base) 	PNC 206176	 Stainless steel lid for Wok pan diam. 360mm 	PNC 911588	
 Frontal kicking strip, 1000mm (not for refr-freezer base) 	PNC 206177	Pressure regulator for gas units	PNC 927225	
Frontal kicking strip, 1200mm (not for refr-freezer base)	PNC 206178			
 Frontal kicking strip, 1600mm (not for refr-freezer base) 	PNC 206179			
 Kit 4 feet for concrete installation (not for 900 line free standing grill) 	PNC 206210			
• Flue condenser for 1 module, 150 mm diameter	PNC 206246			
Pair of side kicking strips	PNC 206249			
Single burner smooth plate for direct cooking - fits frontal burners only	PNC 206260			
• Single burner ribbed plate for direct cooking- fits frontal burners only	PNC 206261			
• Single burner radiant plate for pan support	PNC 206264			
 Pair of side kicking strips for concrete installation 	PNC 206265			
 Water column with swivel arm (water column extension not included) 	PNC 206289			
Water column extension for 700 lineStainless steel double grid for 2	PNC 206291 PNC 206297			
burnersChimney upstand, 800mm	PNC 206304			
Right and left side handrails	PNC 206307			
Back handrail 800 mm	PNC 206308			
• Wok pan support for open burners (700/900)	PNC 206363			
 Base support for feet or wheels - 800mm (700/900) 	PNC 206367			
 Base support for feet or wheels - 1200mm (700/900) 	PNC 206368			
 Base support for feet or wheels - 1600mm (700/900) 	PNC 206369			
 Base support for feet or wheels - 2000mm (700/900) 	PNC 206370			
• Rear paneling - 800mm (700/900)	PNC 206374			
• Rear paneling - 1000mm (700/900)	PNC 206375			
• Rear paneling - 1200mm (700/900)	PNC 206376			

Modular Cooking Range Line 700XP 4-Burner Gas Range on Gas Oven



Modular Cooking Range Line 700XP 4-Burner Gas Range on Gas Oven

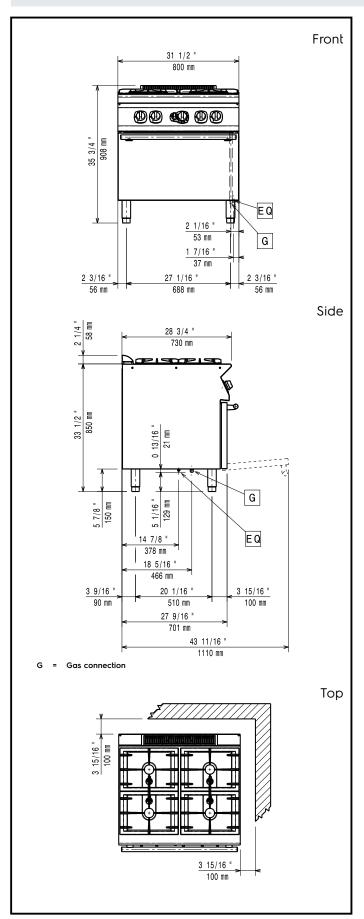

Gas

Gas Power:28 kWStandard gas delivery:G30 - 50 mbarGas Type Option:G31 37 mbar

Gas Inlet: 1/2"

Key Information:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat

insulation fitted.

Oven working Temperature: 110 °C MIN; 270 °C MAX

Oven Cavity Dimensions

(width): 540 mm Oven Cavity Dimensions

(height): 300 mm

Oven Cavity Dimensions (depth): 650 mm

External dimensions, Width: 800 mm
External dimensions, Depth: 730 mm
External dimensions, Height: 850 mm
Net weight: 80 kg

Shipping weight: 99 kg
Shipping height: 1080 mm
Shipping width: 820 mm
Shipping depth: 860 mm
Shipping volume: 0.76 m³
Front Burners Power: 5.5 - 5.5 kW

Back Burners Power: 5.5 - 5.5 kW **Certification group:** N7CG

Back Burners Dimension -

nm Ø 60 Ø 60

Front Burners Dimension -

mm Ø 60 Ø 60

Modular Cooking Range Line 700XP 4-Burner Gas Range on Gas Oven

