

Cooking accessories Automatic water softener for ovens

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA#		



921305 (WASOAU)

Water softener with salt for ovens with automatic regeneration of resin

Short Form Specification

Item No.

Designed specifically for convection and combi ovens starting from from 6 grids. Electromechanical valve that allows regeneration from between once per day to once per week. Operating pressure between 2,8 and 5 bar. Maximum flow rate 1800 lt/h. 8-litre cylinder in 304 AISI stainless steel with 5,6 litres of resin. Maximum salt content in brine of 20 kg. Every rigeneration cycle requires 1kg of salt consumption. Water connection between 4°C to 49°C.

Quantity of soft water depending on hardness according to French regulation: 30°- 2100 lt - 40°- 1900 lt - 50°- 1800 lt - 60°-1700 lt.

Quantity of soft water depending on hardness according to German regulation: 17° - 2100 lt - 22° - 1900 lt - 27° - 1800 lt - 33° -

Main Features

- The water softener has been designed specifically for convection and combi ovens and is suitable for all size of ovens, from 6 to 40 grids.
- Equipped with an electromechanical valve that allows regeneration from between once per day to once per week.
- Operating pressure between 2,8 and 5 bar.
- Maximum flow rate 1800lt/h
- Incorporates 8 litre cylinder in stainless steel 304 AISI with 5,6 litres of resin.
- Maximum salt content in brine of 20 kg. Every rigeneration cycle requires 1kg of salt consumption
- Water connection between 4°C to 49°C.
- Quantity of soft water depending on hardness according to French regulation:

30°- 2100 lt 40°- 1900 lt

50°-1800 lt

60°- 1700 It

Quantity of soft water depending on hardness according to German regulation:

17°- 2100 It


22°- 1900 lt

27°- 1800 lt 33°- 1700 lt

All models comply with the standards required by the main international approval bodies and are CÉ marked.

APPROVAL:



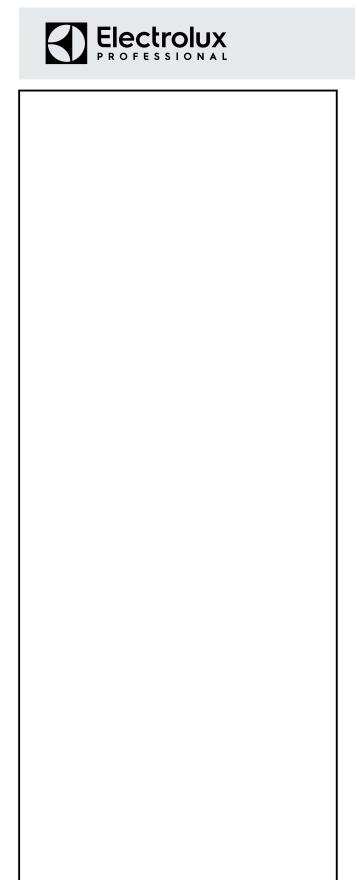

Cooking accessories Automatic water softener for ovens

Cooking accessories Automatic water softener for ovens



Cooking accessories Automatic water softener for ovens

Electric

Supply voltage:

220-230 V/1N ph/50/60 Hz

480 mm

Water:

Pressure, bar min: 2

Key Information:

External dimensions,

Width: 250 mm External dimensions,

Depth:

External dimensions,

Height:

540 mm Net weight: 12 kg

