Electrolux PROFESSIONAL

Modular Cooking Range Line thermaline 85 - Full Module Gas Chargrill Top, 1 Side with Backsplash



588619 Gas Chargrill Top, one-side operated with backsplash

Short Form Specification

Item No.

Unit constructed according to DIN 18860_2 with 20 mm drop nose top. Internal frame for heavy duty sturdiness in stainless steel. 2 mm top in 1.4301 (AISI 304). Flat surface construction, easily cleanable. THERMODUL connection system enables seamless worktop when units are connected and avoids soil penetrating. Heavy duty enamelled cast iron cooking grids with stainless steel handle for easy removal. Special system utilizing stainless steel heat spreading shields below the radiants (PATENT PENDING), to avoid burner clogging, minimize flare ups, and provide even heat distribution. Burners are protected by 1.4509 (AISI 441) stainless steel deflective trays. Fulllength grease collection drawer with filling indicator to collect residual cooking grease. Stainless steel high splash guards on the rear and sides. Metal knobs with embedded hygienic silicon "soft" grip enable easier handling and cleaning.

IPX4 water resistance certification.

Configuration: One side operated top with backsplash. The base is supplied by the factory

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA #		

Main Features

- Special system utilizing stainless steel heat spreading shields below the radiants (PATENT US9591947B2 and related family) avoiding burner clogging and minimizing flare ups while providing an even heat distribution throughout the cooking surface.
- Stainless steel high splash guards on the rear and sides of cooking surface.
- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Metal knobs with embedded hygienic "soft-touch" grip for easier handling and cleaning. The special design of the controls prevents infiltration of liquids or soil into vital components.
- Burners are protected by 1.4509 (AISI 441) stainless steel deflective trays avoiding flare-ups and providing even heat distribution.
- Full-length grease collection drawer with filling indicator, to collect residual cooking grease, and handle to facilitate manipulations.
- Cooking grids made in highly resistant enameled cast iron for easy cleaning.

Construction

- IPx4 water protection.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in 1.4301 (AISI 304).
- Unit constructed according to DIN 18860_2 with 20 mm drop nose top.

Optional Accessories

- Connecting rail kit for appliances PNC 912498 with backsplash, 850mm
- Portioning shelf, 800mm width
 PNC 912526
- Portioning shelf, 800mm width
 PNC 912556
- Folding shelf, 300x850mm
 Folding shelf 400x850mm
 PNC 912580 □
- ► Folding shelf, 400x850mm PNC 912580 □
- Fixed side shelf, 200x850mm PNC 912586
- Fixed side shelf, 300x850mm PNC 912587
- Fixed side shelf, 400x850mm PNC 912588
- Back panel, 800x700mm, for units PNC 913013 with backsplash
- Endrail kit, flush-fitting, with backsplash, left
 Endrail kit, flush-fitting, with backsplash, right
 PNC 913116

 PNC 913116
- Scraper for grills
 Kit scraper and hooks for
 PNC 913121
 PNC 913122
- chargrills

APPROVAL:






 Endrail kit (12.5mm) for thermaline 85 units with backsplash, left 	PNC 913206	
• Endrail kit (12.5mm) for thermaline 85 units with backsplash, right	PNC 913207	
 U-clamping rail for back-to-back installations with backsplash (to be ordered as S-code) 	PNC 913226	
 Insert profile, d=850mm 	PNC 913231	
• Stainless steel side panel (12,5mm), 850x400mm, left side, wall mounted	PNC 913632	
 Stainless steel side panel (12,5mm), 850x400mm, right side, wall mounted 	PNC 913633	
 Stainless steel side panel (12,5mm), 850x400mm, flush-fitting, left side, wall mounted 	PNC 913634	
 Stainless steel side panel (12,5mm), 850x400mm, flush-fitting, right side, wall mounted 	PNC 913635	
 Wall mounting kit top - TL85/90 - 	PNC 913652	

top - 1185/90 - PNC 91365 Factory Fitted

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.



Modular Cooking Range Line thermaline 85 - Full Module Gas Chargrill Top, 1 Side with Backsplash

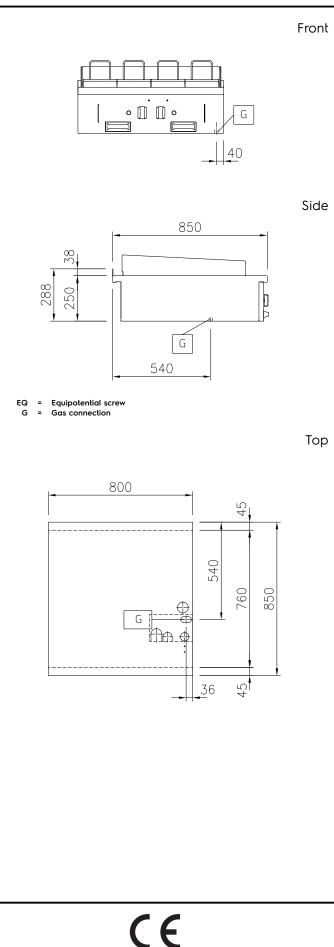

Gas Gas Power: 21 kW Gas Inlet: 1/2" **Key Information:** External dimensions, Width: 800 mm External dimensions, Depth: 850 mm External dimensions, Height: 250 mm Net weight: 110 kg One-Side Operated;Top **Configuration:** Grid dimensions: 728 mm

Sustainability

Energy consumption, Min/ Max

0 - 2.22 m³/h

Modular Cooking Range Line thermaline 85 - Full Module Gas Chargrill Top, 1 Side with Backsplash The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.