

Ice Flaker 150kg/24h Ice Flaker with 40kg bin - Air-cooled

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



730551 (FIM150ASB)

Ice flaker, granular,
150kg/24h, self-contained,
40kg ice collection bin
included, air-cooled (R452a)

Short Form Specification

Item No. _____

AISI 304 stainless steel exterior. Food grade ABS interior. Stainless steel spray arms removable without the use of tools. Fully automatic in operation. Efficient air cooling system. Suitable for gravity drain only. Flexible water supply and drain hoses. A spray system produces solid, crystal clear ice granular flakes.

Rated output is at an ambient air temperature of 21°C and water supply temperature of 15°C.

Self-contained storage bin capacity: 40 Kg.

Main Features


- Bin integrated as standard.
- The ice-making method (crushing system) guarantees compact, hygienically pure crushed ice that is resistant to melting.
- Compliant to CE requirements for safety.
- Fully automatic in operation.
- Suitable for gravity drain only (no pumps needed).
- Rated output is at an ambient air temperature of 21°C and water supply temperature of 15°C.

Construction


- Adjustable feet 110-150 mm.
- Plug as standard (schuko type).
- AISI 304 stainless steel exterior.
- Stainless steel spray arms removable without the use of tools.
- Environmentally friendly: R452a as refrigerant gas.

APPROVAL: _____

Front

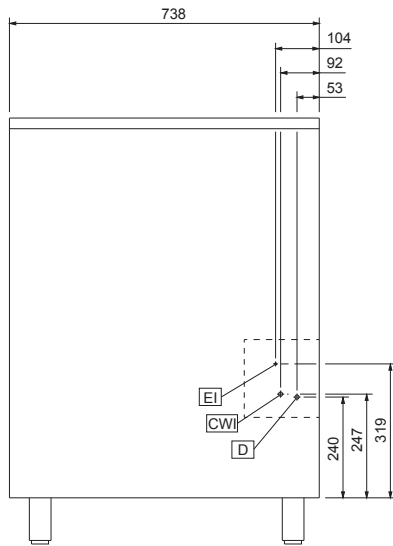


Side

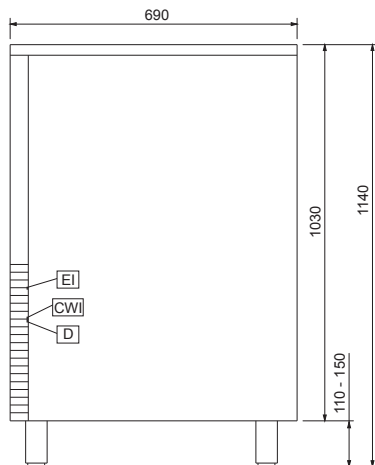

- CWI1** = Cold Water inlet 1
(cleaning)
D = Drain
EI = Electrical inlet (power)

Top

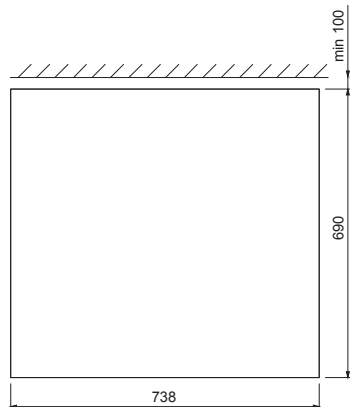

Electric

Supply voltage:
730551 (FIM150ASB) 220-240 V/1N ph/50 Hz
Electrical power max.: 0.65 kW

Capacity:

Bin capacity: 40 kg

Key Information:

External dimensions, Width: 738 mm
External dimensions, Height: 1140 mm
External dimensions, Depth: 690 mm
Net weight: 85 kg
Noise level: 54,3 dBA
Output: 150 kg/day

Refrigeration Data

Refrigerant type: R452A