



## Dough Mixers 10 liter Spiral Dough Kneader, 1 Speed

ITEM #	
MODEL#	
NAME #	
SIS#	
AIA#	



602282 (DSK10L)

10 It spiral Dough Kneader, 1 speed (tool speed 88 rpm), on wheels

## Short Form Specification

#### Item No.

Spiral dough kneader on wheels for pizzerias, bakeries and pastries. Ingredients are kneaded with a stainless steel spiral mixer arm synchronised with bowl rotation (motorized not removable bowl). Body is in painted steel, the 10 lt capacity bowl, the spiral mixer arm and dough breaker pin are in stainless steel. The safety screen allows ingredients to be added without stopping the machine. Equipped with a low voltage control panel with buttons and safety device to stop the machine when the protection screen is opened. I speed= 88 rpm - spiral arm, 10 rpm - bowl. Maximum kneading capacity: 8 kg per cycle (max flour 5kg/cycle), with 60% hydratation.

#### Main Features

- Spiral dough kneader with motorized bowl (not removable) and fixed head.
- Ideal for kneading pizza dough, bread or similar dough.
- One speed kneading (tool speed: 88 rpm, bowl speed: 10 rpm).
- Stainless steel (AISI304) squared dough breaker bar for fast and even kneading results
- Maximum keading capacity: 8 kg per cycle (max flour 5kg/cycle), with 60% hydratation.
- Minimum kneading capacity: 5 kg/cycle, with 60% hydratation.
- Safety device stops the appliance if the cover is openend.
- Equipped with 4 wheels, of which 2 with brakes, allowing to easily move the appliance for storage or cleaning.
- The appliance fits under standard kitchen worktops (see installation drawing).

### Construction

- Constructed in painted steel.
- AISI304 stainless steel bowl, spiral hook and dough breaker bar.
- IP54 protected control panel.
- IP23 for the appliance overall.
- Plug as standard (schuko type).


# Optional Accessories

$\sim$	
liter	
liter Spiral Dough	
Dou	
gh K	
Kneader, 1 Spec	
, 1 Sp	<u> </u>
Эес	7

 $\preceq$ 



# Dough Mixers 10 liter Spiral Dough Kneader, 1 Speed

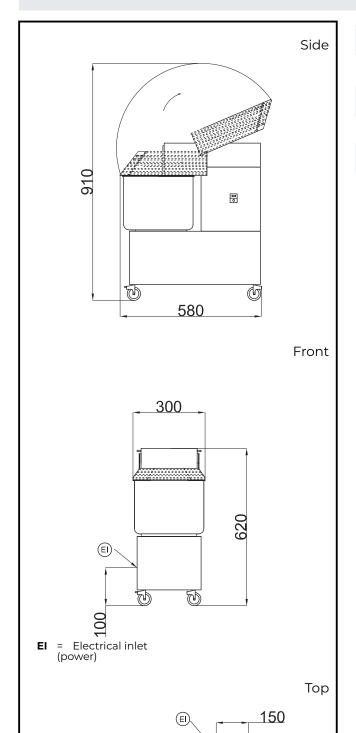

Electric Supply voltage: 220-240 V/1N ph/50 Hz **Electrical power, default:** 0.37 kW Capacity: Maximum kneading (60% hydratation): 8 kg/Cycle Key Information: External dimensions, Width: 300 mm External dimensions, 550 mm Depth: External dimensions, Height: 620 mm **Shipping weight:** 49 kg 10 lt **Bowl capacity:** 



550