

Food Processor Stainless Steel Cutter Mixer - 17.5 LT -2 Speeds with Microtoothed Blade, Bowl and Scraper

| ITEM # |
|--------|
| MODEL# |
| NAME # |
| SIS # |
| AIA# |
| |



600092 (DK180S2)

Cutter mixer 17,5 lt capacity, timer, 2 speeds 1500-3000 rpm. Supplied with microtoothed blade rotor and stainless steel bowl

Short Form Specification

<u>Item No.</u>

Cutter mixer for mixing, chopping, mincing and liquidising. 17,5 litre capacity 304 AISI stainless steel bowl and base hinged transparent BPA free cover with a watertight seal. Lid central opening allows products to be added during the preparation.

Angled perforated micro toothed blades and scraper ensure consistent mixing.

Parts in contact with food are removable and dismountable for efficient cleaning.

Safety granted by magnetic micro switch which stops the machine if lid or bowl are not correctly positioned.

A safety device stops the machine restarting after a power cut, until the operator presses the start button. Touch button control panel, IP65 protection with low voltage level. Model equipped with micro toothed blade, bowl and scraper. Two speed rotation: 1500 and 3000 rpm.

Main Features

- Productivity suitable for 100-300 meals per service, up to 8 kg per cycle.
- Food processor allows fast liquidizing, mixing, mincing, chopping and pastry-making.
- Delivered with:
- -17.5 liter stainless steel bowl with max liquid level indication to avoid spillage
- -micro toothed perforated blade
- -scraper
- Angled perforated knives and conical base of the bowl ensure consistent mixing.
- Lid with central opening to add ingredients in mid-cycle.
- Base fixed cover for a better handling.
- Cover metal frame to ensure seal water tightness to avoid leakage.
- All parts in contact with food are removable without tools and completely dismountable.
- Pulse function for coarse chopping.

Construction

- 304 AISI stainless steel bowl with leak resistant spout and handles, easy to manage.
- Scraper with SS handle, easy to dismount.
- 2 speeds: 1500 and 3000 rpm.
- Power: 3600 watts.
- IP65 touch button control panel.
- Cover handle with double safety locking system.
- Transparent BPA free cover incorporates a magnetic safety system which stops the machine if lid is not properly closed.
- A safety device requires to press the start button to restart the machine after a power cut.
- Asynchronous silent industrial motor for heavy duty and longer life.

Included Accessories

| • | 1 of Scraper for K180S and | PNC 650046 |
|---|-------------------------------|------------|
| | KE180S cutter mixers | |
| _ | 1 of Microtoothad blade reter | DNC GEOO/7 |

- 1 of Microtoothed blade rotor PNC 650047 for 17,5 lt cutter mixer
- 1 of Stainless steel bowl for 17,5 PNC 650074 It cutter mixer

Optional Accessories

| • Scraper for K180S and KE180S cutter mixers | PNC 650046 □ |
|---|--------------|
| Microtoothed blade rotor for 17,5 lt cutter mixer | PNC 650047 🗅 |
| Stainless steel bowl for 17,5 lt cutter mixer | PNC 650074 🗖 |
| Stainless steel mobile stand. Height: 730 mm for BPO models | PNC 653017 🗅 |

Smooth blade rotor for 17,5 lt PNC 653119
 cutter mixer

APPROVAL:






• Serrated blade rotor for 17,5 lt PNC 653120 ☐ cutter mixer

Serrated blade rotor for meat for PNC 653539
 17,5 lt cutter mixer





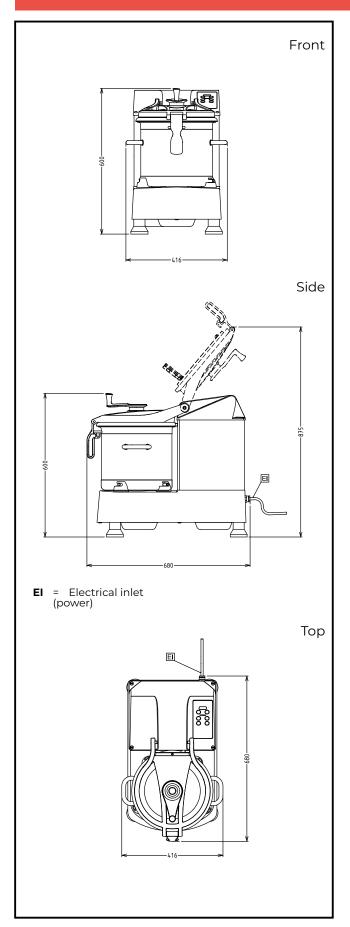

| Electric | |
|--|--|
| Supply voltage: Electrical power, max: Total Watts: | 380-415 V/3 ph/50 Hz 3.6 kW 3.6 kW |
| Capacity: | |
| Performance (up to): Capacity: | 8 kg/Cycle 17.5 litres |
| Key Information: | |
| External dimensions, Width: External dimensions, Depth: | 416 mm 680 mm |
| External dimensions, Height: Shipping weight: | 603 mm 80 kg |

