

# Planetary Mixers Stainless Steel Planetary Mixer, 60 lt

ITEM#		
MODEL#		
NAME#		
SIS#		
AIA#		
7 (17 ( 11		



#### 600178 (DBMX60XB3)

60 It stainless steel planetary mixer, bowl detection device and SOLID BPA free safety screen, with mechanical speed variator, timer and bowl lighting. Manual bowl movement. Equipped with stainless steel spiral hook, paddle and whisk.

## **Short Form Specification**

Item No.

Floor model, suitable for all kneading, blending and whipping operations. Stainless steel body with 18/8 (AISI 302) 60 litre stainless steel bowl. Powerful asynchronous motor (1500 W) with two level mechanical speed variator with speeds ranging from 1 to 10 (20 to 180 rpm). Plastic safety screen easily removable for cleaning. Control panel with timer and bowl lighting. Manual bowl lifting system. Removable/transparent solid safety screen - made of a bisphenol-A free (BPA) copolyester. Bowl detection device allows the mixer to switch on only when the bowl and the safety screen are properly installed and positioned together.

Supplied with 3 tools: stainless steel spiral kneading hook, cast aluminium paddle and stainless steel wire whisk.

#### **Main Features**

- Professional beater mixer for kneading, mixing and whisking all types of food products.
- Delivered with:
  - -Stainless steel spiral kneading hook, Cast aluminum paddle, 302 AISI stainless steel whisk and Mixing Bowl for 60 It
- Two level mechanical speed variator.
- Maximum capacity (flour, with 60% of hydration) 20 kg, suitable for 400-800 meals per service.
- Waterproof control panel with timer setting knob, speed setting handle and speed display.
- Manual bowl lifting and lighting system.
- Safety device will automatically stop the machine if the screen is lifted.
- Solid BPA-free safety screen, covering the stainless steel wire one, limits the flour and unsafe dust particles when used in bakery and pastry preparation.
- Removable chute to add ingredients while working included as standard.
- Bowl detection device allows the mixer to switch on only when the bowl and the solid safety screen are properly installed and positioned together.


#### Construction

- Body entirely in stainless steel.
- 302 AISI Stainless steel bowl 60 lt. capacity.
- Asynchronous motor with high start-up torque.
- 10 speeds from 20 to 180 rpm (planetary movement), to be set while machine is working, according to the tool and the mixture hardness.
- Water protected planetary system (IP55 electrical controls, IP23 overall machine).
- Planetary movement based on self lubricating gears, eliminating any risk of leaks.
- Power: 1500 watts.
- Overload protected planetary system and motor.
- Adjustable feet for perfect stability.
- Plastic safety screen easily removable for cleaning.

APPROVAL:



## Planetary Mixers Stainless Steel Planetary Mixer, 60 lt

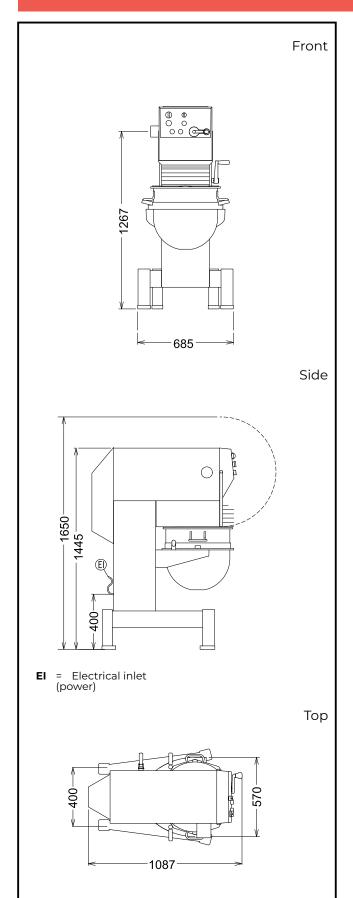

Electric	
Supply voltage: Electrical power, max: Total Watts:	220-240/380-415 V/3 ph/50 Hz 1.54 kW 1.54 kW
Capacity:	
Performance (up to): Capacity:	ISO 9001; ISO 14001 kg/ Cycle 60 litres
Key Information:	
External dimensions, Width: External dimensions,	685 mm
Depth:	1087 mm
External dimensions, Height:	1445 mm
Shipping weight:	332 kg
Cold water paste:	ISO 9001; ISO 14001 kg with Spiral hook

100 with Whisk

Egg whites:





# Planetary Mixers Stainless Steel Planetary Mixer, 60 lt

### **Included Accessories**

• 1 of Bowl 60 lt mixer	PNC 650129	
• 1 of Paddle 60 lt	PNC 653083	
• 1 of Stainless steel (AISI 303) Spiral Hook for 60 lt planetary mixers	PNC 653084	
• 1 of Whisk 60 lt	PNC 653086	
<b>Optional Accessories</b>		
<ul> <li>40 It reduction kit (bowl, spiral hook, paddle, whisk) for 60 It and 80 It planetary mixers</li> </ul>	PNC 650127	
Bowl 60 It mixer	PNC 650129	
• Paddle 60 It	PNC 653083	
<ul> <li>Stainless steel (AISI 303) Spiral Hook for 60 It planetary mixers</li> </ul>	PNC 653084	
Whisk 60 It	PNC 653086	
• Reinforced Whisk 60 lt (for heavy duty use)	PNC 653097	
Bowl scraper 60 lt	PNC 653442	
<ul> <li>Bowl trolley for 40/60/80 lt planetary mixers</li> </ul>	PNC 653585	