
# Electrolux PROFESSIONAL

Modular Cooking Range Line 700XP Two Wells Electric Fryer Top 12 liter



371080 (E7FREH2E00)	12+12-lt electric fryer top with 2 wells and 2 baskets, internal heating elements
371143 (E7FREH2E0N)	12+12-It electric fryer top with 2 wells and 2 baskets, internal heating elements

## **Short Form Specification**

#### Item No.

To be installed on open base installations, bridging supports or cantilever systems. High efficiency tilting incoloy armoured heating elements (17.4kW) placed inside the wells. Deep drawn wells. Oil drains through a tap on the front. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

# Main Features

- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- Thermostatic regulation of oil temperature up to a maximum of 185 °C.
- Overheat protection thermostat as standard on all units.
- Oil drains through a tap positioned on the front the wells.
- All major compartments located in front of unit for ease of maintenance.
- IPX 4 water protection.
- Incoloy armoured heating elements located inside the well can be lifted up for easier cleaning.
- Optional portable oil quality monitoring tool (code 9B8081) for efficient oil management.
- Suitable for countertop installation.

## Construction

- Interior of well with rounded corners for ease of cleaning.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

## **Included Accessories**

• 2 of Basket for 12lt electric PNC 921629 fryer tops

## **Optional Accessories**

- Junction sealing kit
  Support for bridge type installation, 800mm
  Support for bridge type installation, 1000mm
  PNC 206138 □
- Support for bridge type PNC 206139 🖵 installation, 1200mm
- Support for bridge type PNC 206140 installation, 1400mm
- Support for bridge type installation, 1600mm
   2 supports with side runners
   PNC 206244 □
- 2 supports with side runners for 4 GN 1/1 containers for open base cupboards (multifunctional cookers, solid top and gas ranges with cupboard) (only for 371143)

#### APPROVAL:



SIS #

AIA #

ITEM #

<u>MODEL #</u> NAME #




• 2 supports runners for open base for 4 GN1/1 (only for 371080)	PNC 206257	
<ul> <li>Chimney upstand, 800mm</li> </ul>	PNC 206304	
<ul> <li>Right and left side handrails</li> </ul>	PNC 206307	
<ul> <li>Back handrail 800mm, Marine</li> </ul>	PNC 206308	
<ul> <li>Chimney grid net, 400mm (700XP/900)</li> </ul>	PNC 206400	
<ul> <li>2 side covering panels for top appliances</li> </ul>	PNC 216277	
<ul> <li>Basket for 12lt electric fryer tops</li> </ul>	PNC 921629	
. O la statua la fair Ou Ella sua di 10 la al-statia	DNIC 040470	

• 2 baskets for 2x5lt and 12lt electric PNC 960638 fryers



The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

# **Electrolux** PROFESSIONAL

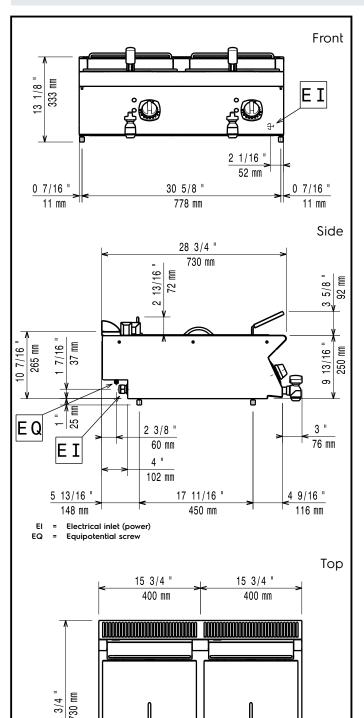

# Modular Cooking Range Line 700XP Two Wells Electric Fryer Top 12 liter

### Electric

#### Supply voltage:

	380-400 V/3N ph/50/60 Hz
371080 (E7FREH2E00)	
371143 (E7FREH2E0N)	230 V/3 ph/50/60 Hz
Total Watts:	17.4 kW

#### **Key Information:**

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Usable well dimensions (width):	240 mm
Usable well dimensions (height):	235 mm
Usable well dimensions (depth):	420 mm
Well capacity:	10 It MIN; 12 It MAX
Thermostat Range:	105 °C MIN; 185 °C MAX
Net weight:	45 kg
Shipping weight:	
371080 (E7FREH2E00)	51 kg
371143 (E7FREH2E0N)	52 kg
Shipping height:	
371080 (E7FREH2E00)	520 mm
371143 (E7FREH2E0N)	540 mm
Shipping width:	820 mm
Shipping depth:	860 mm
Shipping volume:	
371080 (E7FREH2E00)	0.37 m³
371143 (E7FREH2E0N)	0.38 m³
[NOT TRANSLATED]	
371080 (E7FREH2E00)	EFI7212
371143 (E7FREH2E0N)	N7FE2



D

Ū

E 730 28

# Modular Cooking Range Line 700XP Two Wells Electric Fryer Top 12 liter

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.