



**Electrolux**  
PROFESSIONAL

## Modular Cooking Range Line 900XP 4-Burner Gas Range on Electric Oven

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



**391010 (E9GCGH4CE0)**

4-burner (1x10 kW, 3x6 kW)  
gas range on electric oven  
(6 kW)

**391164 (E9GCGH4CEN)**

4-burner (1x10 kW, 3x6 kW)  
gas range on electric oven  
(6 kW)

### Short Form Specification

#### Item No. \_\_\_\_\_

To be installed on stainless steel feet with height adjustment up to 50 mm. High efficiency flower flame burners with continuous power regulation and optimized combustion. Flame failure device as standard on burners to protect against accidental extinguishing. Oven chamber with 3 levels of runners to accommodate 2/1 GN shelves (2 steam pans). Ribbed, cast-iron oven base plate. Exterior panels of unit in stainless steel with Scotch Brite finish. Pan supports in heavy duty cast iron. Extra strength work top in heavy duty 2 mm stainless steel. Right-angled side edges to allow flush-fitting junction between units.

### Main Features

- Unit to be mounted on stainless steel feet with height adjustment up to 50 mm. Unit can be easily mounted on cantilever systems.
- The three 6 kW and one 10 kW high efficiency burners are available in two different sizes to suit high performing cooking requirements of the most demanding customers: CHAR(13) CHAR(10)-60 mm burners with continuous power regulation from 1,5 to 6 kW CHAR(
- Gas burners supplied for use with natural or LPG gas, conversion jets supplied as standard.
- Large sized pan support in cast iron (stainless steel as option) with long center fins to allow the use of the largest down to the smallest pans.
- Burners with optimized combustion.
- Flame failure device on each burner protects against gas leakage when accidental extinguishing of the flame occurs.
- Protected pilot light.
- Base compartment consists of an electric standard oven with 40 mm thick oven door for heat insulation, positioned beneath the base plate.
- Oven chamber with 3 levels of runners to accommodate 2/1 GN shelves (2 steam pans).
- Ribbed cast iron oven base plate.
- Oven thermostat adjustable from 110 °C to 285 °C or from 120 °C to 280 °C for model 391164.
- The special design of the control knob system guarantees against water infiltration.
- IPX5 water protection.
- Control knobs provide smooth, continuous rotation from min to max power level.

### Construction

- Unit is 930 mm deep to give a larger working surface area.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- AISI 304 stainless steel worktop, 2mm thick.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

### Included Accessories

- 1 of GN2/1 chrome grid for static oven PNC 164250

### Optional Accessories

- GN2/1 chrome grid for static oven PNC 164250 ☐
- Junction sealing kit PNC 206086 ☐


APPROVAL: \_\_\_\_\_




Experience the Excellence  
[www.electroluxprofessional.com](http://www.electroluxprofessional.com)  
[professional@electrolux.com](mailto:professional@electrolux.com)

|                                                                               |            |                          |                                                                    |            |                          |
|-------------------------------------------------------------------------------|------------|--------------------------|--------------------------------------------------------------------|------------|--------------------------|
| • Draught diverter, 150 mm diameter                                           | PNC 206132 | <input type="checkbox"/> | • Base support for feet or wheels - 1600mm (700/900)               | PNC 206369 | <input type="checkbox"/> |
| • Matching ring for flue condenser, 150 mm diameter                           | PNC 206133 | <input type="checkbox"/> | • Base support for feet or wheels - 2000mm (700/900)               | PNC 206370 | <input type="checkbox"/> |
| • Kit 4 wheels - 2 swivelling with brake                                      | PNC 206135 | <input type="checkbox"/> | • Rear paneling - 800mm (700/900)                                  | PNC 206374 | <input type="checkbox"/> |
| • Flanged feet kit                                                            | PNC 206136 | <input type="checkbox"/> | • Rear paneling - 1000mm (700/900)                                 | PNC 206375 | <input type="checkbox"/> |
| • Frontal kicking strip for concrete installation, 800mm                      | PNC 206148 | <input type="checkbox"/> | • Rear paneling - 1200mm (700/900)                                 | PNC 206376 | <input type="checkbox"/> |
| • Frontal kicking strip for concrete installation, 1000mm                     | PNC 206150 | <input type="checkbox"/> | • - NOT TRANSLATED - (only for 391010)                             | PNC 206384 | <input type="checkbox"/> |
| • Frontal kicking strip for concrete installation, 1200mm                     | PNC 206151 | <input type="checkbox"/> | • Chimney grid net, 400mm (700XP/900)                              | PNC 206400 | <input type="checkbox"/> |
| • Frontal kicking strip for concrete installation, 1600mm                     | PNC 206152 | <input type="checkbox"/> | • - NOT TRANSLATED - (only for 391010)                             | PNC 206458 | <input type="checkbox"/> |
| • 2 SIDE KICKING STRIPS- CONCRETE INST-900                                    | PNC 206157 | <input type="checkbox"/> | • Side handrail-right/left hand (900XP)                            | PNC 216044 | <input type="checkbox"/> |
| • Single burner radiant plate for pan support                                 | PNC 206170 | <input type="checkbox"/> | • Frontal handrail, 800mm                                          | PNC 216047 | <input type="checkbox"/> |
| • Single burner smooth plate for direct cooking - fits frontal burners only   | PNC 206171 | <input type="checkbox"/> | • Frontal handrail, 1200mm                                         | PNC 216049 | <input type="checkbox"/> |
| • Single burner ribbed plate for direct cooking - fits frontal burners only   | PNC 206172 | <input type="checkbox"/> | • Frontal handrail, 1600mm                                         | PNC 216050 | <input type="checkbox"/> |
| • Frontal kicking strip, 800mm (not for refr-freezer base)                    | PNC 206176 | <input type="checkbox"/> | • 2 side covering panels for free standing appliances              | PNC 216134 | <input type="checkbox"/> |
| • Frontal kicking strip, 1000mm (not for refr-freezer base)                   | PNC 206177 | <input type="checkbox"/> | • Large handrail - portioning shelf, 400mm                         | PNC 216185 | <input type="checkbox"/> |
| • Frontal kicking strip, 1200mm (not for refr-freezer base)                   | PNC 206178 | <input type="checkbox"/> | • Large handrail - portioning shelf, 800mm                         | PNC 216186 | <input type="checkbox"/> |
| • Frontal kicking strip, 1600mm (not for refr-freezer base)                   | PNC 206179 | <input type="checkbox"/> | • Pressure regulator for gas units                                 | PNC 927225 | <input type="checkbox"/> |
| • Pair of side kicking strips (not for refr-freezer base)                     | PNC 206180 | <input type="checkbox"/> | • Deflector for floured products for 23lt fryers (only for 391010) | PNC 960645 | <input type="checkbox"/> |
| • 2 panels for service duct for single installation                           | PNC 206181 | <input type="checkbox"/> |                                                                    |            |                          |
| • Hygienic lid for 23lt fryers (only for 391164)                              | PNC 206201 | <input type="checkbox"/> |                                                                    |            |                          |
| • 2 panels for service duct for back to back installation                     | PNC 206202 | <input type="checkbox"/> |                                                                    |            |                          |
| • Kit 4 feet for concrete installation (not for 900 line free standing grill) | PNC 206210 | <input type="checkbox"/> |                                                                    |            |                          |
| • Flue condenser for 1 module, 150 mm diameter                                | PNC 206246 | <input type="checkbox"/> |                                                                    |            |                          |
| • Water column with swivel arm (water column extension not included)          | PNC 206289 | <input type="checkbox"/> |                                                                    |            |                          |
| • Water column extension for 900 line                                         | PNC 206290 | <input type="checkbox"/> |                                                                    |            |                          |
| • Stainless steel double grid for 2 burners                                   | PNC 206298 | <input type="checkbox"/> |                                                                    |            |                          |
| • Chimney upstand, 800mm                                                      | PNC 206304 | <input type="checkbox"/> |                                                                    |            |                          |
| • Back handrail 800mm, Marine                                                 | PNC 206308 | <input type="checkbox"/> |                                                                    |            |                          |
| • - NOT TRANSLATED -                                                          | PNC 206309 | <input type="checkbox"/> |                                                                    |            |                          |
| • Wok pan support for open burners (700/900)                                  | PNC 206363 | <input type="checkbox"/> |                                                                    |            |                          |
| • Base support for feet or wheels - 800mm (700/900)                           | PNC 206367 | <input type="checkbox"/> |                                                                    |            |                          |
| • Base support for feet or wheels - 1200mm (700/900)                          | PNC 206368 | <input type="checkbox"/> |                                                                    |            |                          |

Front

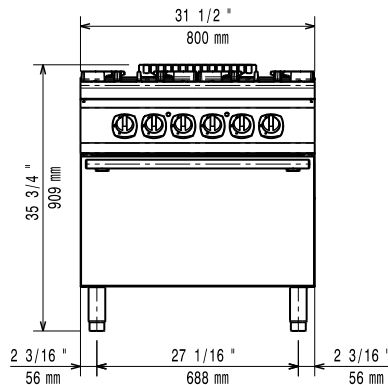


Side

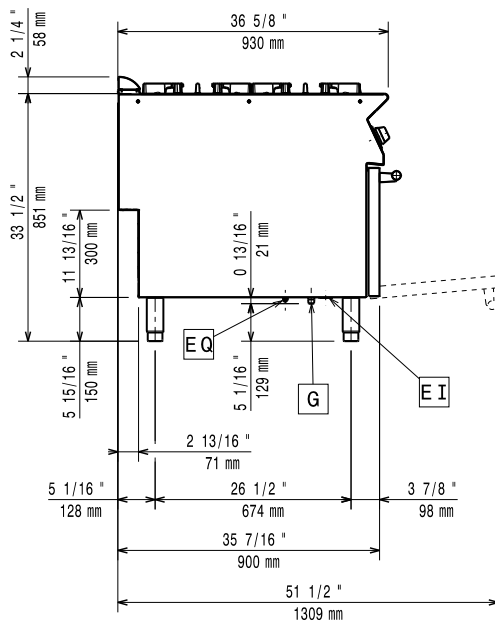

EI = Electrical inlet (power)  
 G = Gas connection

Top

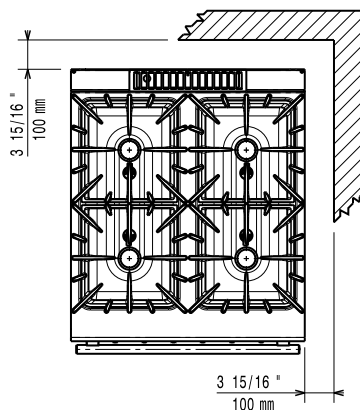

### Gas

#### Natural gas - Pressure:

391010 (E9GCGH4CE0) 7" w.c. (17.4 mbar)

#### Gas Power:

28 kW

#### Standard gas delivery:

Natural Gas G20 (20mbar)

#### Gas Type Option:

LPG; Natural Gas

#### Gas Inlet:

1/2"

### Key Information:

#### Oven Heat Input:

6 kW

#### Oven working Temperature:

391010 (E9GCGH4CE0) 110 °C MIN; 285 °C MAX

391164 (E9GCGH4CEN) 120 °C MIN; 280 °C MAX

#### Oven Cavity Dimensions (width):

575 mm

#### Oven Cavity Dimensions (height):

300 mm

#### Oven Cavity Dimensions (depth):

700 mm

#### Net weight:

391010 (E9GCGH4CE0) 155 kg

391164 (E9GCGH4CEN) 203 kg

#### Shipping weight:

391010 (E9GCGH4CE0) 137 kg

391164 (E9GCGH4CEN) 130 kg

#### Shipping height:

391010 (E9GCGH4CE0) 1080 mm

391164 (E9GCGH4CEN) 1040 mm

#### Shipping width:

1020 mm

#### Shipping depth:

860 mm

#### Shipping volume:

391010 (E9GCGH4CE0) 0.95 m<sup>3</sup>

391164 (E9GCGH4CEN) 0.91 m<sup>3</sup>

#### Front Burners Power:

6 - 6 kW

#### Back Burners Power:

6 - 10 kW

#### [NOT TRANSLATED]

N9CG

#### Back Burners Dimension - mm

Ø 60 Ø 100

#### Front Burners Dimension - mm

Ø 60 Ø 60

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.