


Water Treatment External automatic water softner, 81t

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA#		
AIA #		

22°- 900 lt 33°- 700 lt 44°- 500 lt

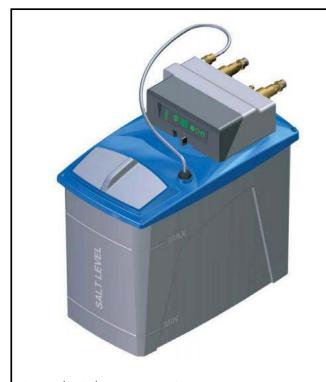

860413 (ADAU)

8It external automatic water softener

Short Form Specification

Item No.

Designed specifically for smaller dishwashers such as undercounter and front loading models. 2x24 volt solenoid valves linked to an electronic control board that set the regenerating cycles.

Automatic regeneration allows programming of 3 regeneration cycles per week: 1 every week, 2 every 4 days, 3 every 2 days. Operating pressure between 2 and 8 bar. Includes back up battery to store input data during power cuts. Semi automatic regeneration is via push button. Incorporates 8-litre cylinder in stainless steel 304 AISI with 5,6 litres of resin. Min/maximum flow rate 400/900 I/h. Every regeneration cycle requires 1 kg of salt. Water connection between 5°C and 15°C. Quantity of soft water depending on hardness according to French regulation:

20°- 1200 It

30°- 1000 lt

40°- 900 It

60°- 700 It

80°- 500 It

Quantity of soft water depending on hardness according to German regulation:

11°- 1200 It

17°- 1000 It

APPROVAL:





Water Treatment External automatic water softner, 81t

Main Features

- Operating pressure between 2 and 8 bars.
- Semi automatic regeneration is via push button.
- Every regeneration cycle requires 1 kg of salt.
- Water connection between 4°C and 25°C.
- Automatic regeneration allows programming of 3 regeneration cycles per week: 1 every week, 2 every 4 days, 3 every 2 days.
- Quantity of soft water depending on supply water hardness: 20°f (11°d) - 1680 lt 30°f (16°d) - 1120 lt 40°f (22°d) - 8400 lt 50°f (28°d) - 672 lt 60°f (33°d) - 560 lt

Construction

- Includes back up battery to store input data during power cuts.
- Maximum flow rate 1500 I/h.
- Incorporates 8 litre cylinder in stainless steel 304 AISI with 5,6 litres of resin.



Water Treatment External automatic water softner,

Key Information:	
External dimensions, Width: 860413 (ADAU) External dimensions, Depth: External dimensions, Height: Net weight: Shipping height: Packaging size (WxDxH):	245 mm
	560 mm 19 kg 18 7/8" (480 mm)
	430x230x380 mm

