



**Electrolux**  
PROFESSIONAL

**Warewashing**  
**Small Pot & Pan Washer with Drain**  
**Pump & Detergent Dispenser, High**  
**Opening**

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



**506050 (EPPWEHG)**

Electric pot&pan washer  
with electronic control, drain  
pump, detergent and rinse  
aid dispenser, high opening

Supplied with: n. 1 basket in stainless steel and n. 1 rack for containers  
and trays.

## Short Form Specification

### Item No. \_\_\_\_\_

304 AISI stainless steel front and side panels, wash tank, tank filter and wash and rinse arms. Double skinned insulated door divided in 2 parts with 180° frontal opening. N. 4 washing cycles.

Built-in atmospheric, insulated water boiler (10,5 kW), 18-liter capacity, combined with rinse booster pump guarantee a constant hot rinse temperature of 84°C. Boiler with 304 welding for protection against corrosion.

Wash Safe Control assures the correct water temperature and pressure during the rinse phase to guarantee a perfect rinsing performance independent from the water pressure in the network (min. 0,5 bar).

High efficiency air gap (class A) in water inlet circuit to avoid water being syphoned back into the network as a result of a sudden drop in mains pressure.

Fault auto-diagnosis system. Self-cleaning cycle. Drain pump, rinse aid and detergent dispenser included.

Pre-arrangements for connection to an Energy Management device and to an automatic detergent dispenser.

Cell dimensions mm670x710x710h.

Load capacity: n.3x1/1 GN or 3 trays mm600x800.

For front-feed loading. IPX5 water protection.

**APPROVAL:** \_\_\_\_\_



Experience the Excellence  
[www.electroluxprofessional.com](http://www.electroluxprofessional.com)  
[professional@electrolux.com](mailto:professional@electrolux.com)

## Main Features

- Atmospheric insulated boiler combined with the rinse booster pump for perfect rinsing results (water temperature and pressure always constant during rinsing cycles), independent from the inlet water pressure.
- Green light of "WASH SAFE CONTROL" confirms that items have been rinsed properly.
- High efficiency air gap (class A) in water inlet circuit to avoid water being siphoned back into the network as a result of a sudden drop in main pressures.
- Open air gap in compliance with WRC regulations.
- 4 washing programs (one program is continual).
- Equipped with drain pump and built-in detergent dispenser for easy and quick installation without opening the machine.
- Easier access to the washing chamber thanks to the 180° frontal opening door.
- Requires limited space for opening thanks to the door divided in 2 sections.
- Self-cleaning cycle.
- Available upon request, pre-arranged model for HACCP implementation (both basic as well as integrated system).
- Low noise level.
- Simple electronic control panel.
- Fault auto-diagnosis system.
- Simple service from the front.

- |   |            |                          |
|---|------------|--------------------------|
| • Filter for partial demineralization             | PNC 864017 | <input type="checkbox"/> |
| • Kit to measure total and partial water hardness | PNC 864050 | <input type="checkbox"/> |
| • Extra rack for containers and trays             | PNC 864182 | <input type="checkbox"/> |
| • Stainless steel basket for pot washer, 688mm    | PNC 864191 | <input type="checkbox"/> |
| • Filter for total demineralization               | PNC 864367 | <input type="checkbox"/> |
| • Kit for trays in Potwashers                     | PNC 864471 | <input type="checkbox"/> |

## Construction

- 304 stainless steel boiler with higher welding protection to increase resistance to corrosion.
- External connecting board protected by a waterproof plastic box.
- Unit to feature smooth surfaces to facilitate cleaning.
- Easy to remove pump and tank filters.
- Large strainer box above the water surface for frequent cleaning operations.
- Equipped with side washing arms in addition to upper and lower wash arms.
- 304 AISI stainless steel front and side panels, wash tank, tank filter and wash and rinse arms.
- Unit to feature rinse aid dispenser pump.

## Sustainability



- Double skin insulated door to reduce heat dispersion.
- Pre-arranged to be connected to Energy Management device.


## Included Accessories

- |   |            |
|---|------------|
| • 1 of Extra rack for containers and trays          | PNC 864182 |
| • 1 of Stainless steel basket for pot washer, 688mm | PNC 864191 |


## Optional Accessories

- |                      |            |                          |
|----------------------|------------|--------------------------|
| • - NOT TRANSLATED - | PNC 864015 | <input type="checkbox"/> |
|----------------------|------------|--------------------------|

Front

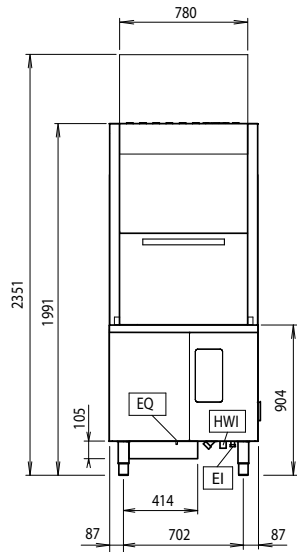


Side

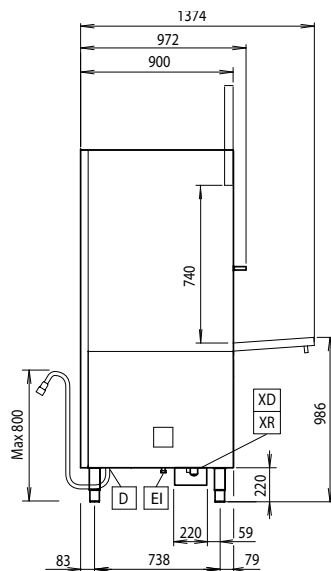

D = Drain  
 EI = Electrical inlet (power)  
 EO = Electrical Outlet  
 HWI = Hot water inlet  
 XD = Detergent connection  
 XR = Rinse aid connection

Top



## Electric

Supply voltage:	400 V/3N ph/50 Hz
Electrical power max.:	20 kW
Default Installed Power:	13 kW
Wash pump power:	2.5 kW

## Water:

Pressure, bar min/max:	0.5-7 bar
Washing cycle electrical elements:	7 kW
Hot rinse cycle duration (sec.):	20
Water supply temperature*:	50 °C
Washing tank capacity (lt):	95
Boiler Capacity (lt):	18

## Key Information:

Rinsing water consumption (per cycle):	7 lt
Washing cycle temperature:	55-65 °C
Hot rinse cycle temperature:	84 °C
N° of working cycles - sec.:	4 (180/360/540/inf)
Cell dimensions - width:	670 mm
Cell dimensions - depth:	710 mm
Cell dimensions - height:	740 mm
External dimensions, Width:	876 mm
External dimensions, Depth:	900 mm
External dimensions, Height:	1991 mm
Net weight:	216 kg
Shipping weight:	255 kg
Shipping height:	2250 mm
Shipping width:	1030 mm
Shipping depth:	1030 mm
Shipping volume:	2.39 m³