
# **Electrolux**

Modular Cooking Range Line 900XP 6-Burner Gas Range on Large Gas Oven

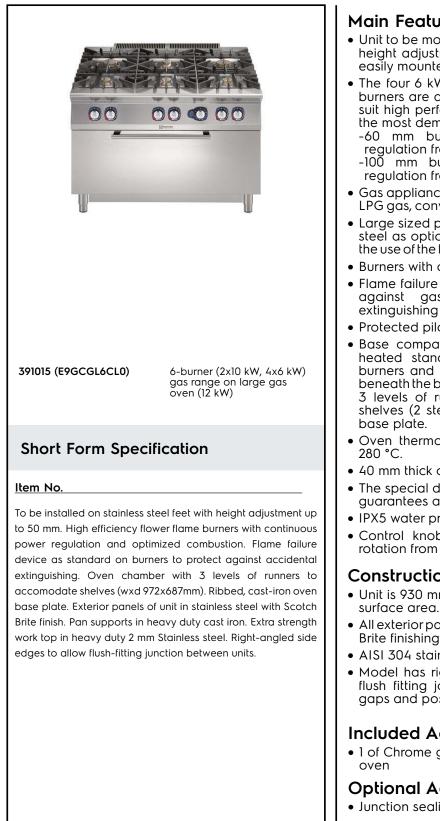

## SIS # AIA #

#### Main Features

ITEM #

MODEL # NAME #

- Unit to be mounted on stainless steel feet with height adjustment up to 50 mm. Unit can be easily mounted on cantilever systems.
- The four 6 kW and two 10 kW high efficiency burners are available in two different sizes to suit high performing cooking requirements of the most demanding customers:
  - -60 mm burners with continuous power regulation from 1,5 to 6 kW
- -100 mm burners with continuous power regulation from 2.2 kW to 10 kW
- Gas appliance supplied for use with natural or LPG gas, conversion jets supplied as standard.
- Large sized pan support in cast iron (stainless steel as option) with long center fins to allow the use of the largest down to the smallest pans.
- Burners with optimized combustion.
- Flame failure device on each burner protects against gas leakage when accidental extinguishing of the flame occurs.
- Protected pilot light.
- Base compartment consists of a large gas heated standard oven with stainless steel burners and self stabilizing flame positioned beneath the base plate. Oven chamber to have 3 levels of runners to accomodate 2/1 GN shelves (2 steam pans) and ribbed cast iron
- Oven thermostat adjustable from 120 °C to
- 40 mm thick oven door for heat insulation.
- The special design of the control knob system guarantees against water infiltration.
- IPX5 water protection.
- Control knobs provide smooth, continuous rotation from min to max power level.

#### Construction

- Unit is 930 mm deep to give a larger working surface area.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- AISI 304 stainless steel worktop, 2mm thick.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

#### Included Accessories

• 1 of Chrome grid for large PNC 206204

#### **Optional Accessories**

• Junction sealing kit PNC 206086 🗅

#### APPROVAL:



#### Modular Cooking Range Line 900XP 6-Burner Gas Range on Large Gas Oven

<ul> <li>Draught diverter with 150mm diameter</li> </ul>	PNC 206132	
Matching ring for flue condenser	PNC 206133	
• 4 wheels, 2 swivelling with brake	PNC 206135	
(700/900XP). It is mandatory to		
install with base supports for feet/		
wheels.	DNIC 20/17/	
Flanged feet kit	PNC 206136	
<ul> <li>Frontal kicking strip for concrete installation, 1200mm</li> </ul>	PNC 206151	
<ul> <li>Frontal kicking strip for concrete installation, 1600mm</li> </ul>	PNC 206152	
• Single burner radiant plate for pan	PNC 206170	
<ul><li>support</li><li>Single burner smooth plate</li></ul>	PNC 206171	
<ul> <li>Single burner ribbed plate</li> </ul>	PNC 206172	
-	PNC 206172	
• Frontal kicking strip, 1200mm (not for refr-freezer base)		-
<ul> <li>Frontal kicking strip, 1600mm (not for refr-freezer base)</li> </ul>	PNC 206179	
<ul> <li>Pair of side kicking strips (not for refr-freezer base)</li> </ul>	PNC 206180	
<ul> <li>2 panels for service duct for single installation</li> </ul>	PNC 206181	
• 2 panels for service duct for back to back installation	PNC 206202	
Chrome grid for large oven	PNC 206204	
<ul> <li>4 feet for concrete installation</li> </ul>	PNC 206210	
• Flue condenser for 1 module, 150	PNC 206246	
<ul><li>Mater coulumn with swivel arm</li></ul>	PNC 206289	
(water column extension not included)	PINC 200209	
• Water column extension for 900 line	PNC 206290	
<ul> <li>Stainless steel double grid for 2 burners</li> </ul>	PNC 206298	
<ul> <li>Chimney upstand, 1200mm</li> </ul>	PNC 206306	
• BACK HANDRAIL 1200 MM -	PNC 206309	
MARINE		
<ul> <li>Wok pan support for open burners (700/900)</li> </ul>	PNC 206363	
<ul> <li>Base support for feet or wheels - 1200mm (700/900)</li> </ul>	PNC 206368	
Base support for feet or wheels - 1600mm (700/900)	PNC 206369	
Base support for feet or wheels - 2000mm (700/900)	PNC 206370	
• Rear paneling - 1200mm (700/900)	PNC 206376	
• Kit town gas nozzles (G150) for 900	PNC 206385	
gas ranges on gas oven		
• Chimney grid net, 400mm	PNC 206400	
• - NOT TRANSLATED -	PNC 206458	
<ul> <li>Side handrail-right/left hand</li> </ul>	PNC 216044	
• Frontal handrail 1200mm	PNC 216049	
Frontal handrail 1600mm	PNC 216050	
• 2 side covering panels for free	PNC 216134	
standing appliances		-

<ul> <li>Large handrail - portioning shelf, 400mm</li> </ul>	PNC 216185	
• Large handrail - portioning shelf, 800mm	PNC 216186	
2HALF BASKETS 18L FRYERS W/ FRONT HOOK	PNC 927200	


• Pressure regulator for gas units PNC 927225


The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

### Electrolux PROFESSIONAL

#### Modular Cooking Range Line 900XP 6-Burner Gas Range on Large Gas Oven

Gas

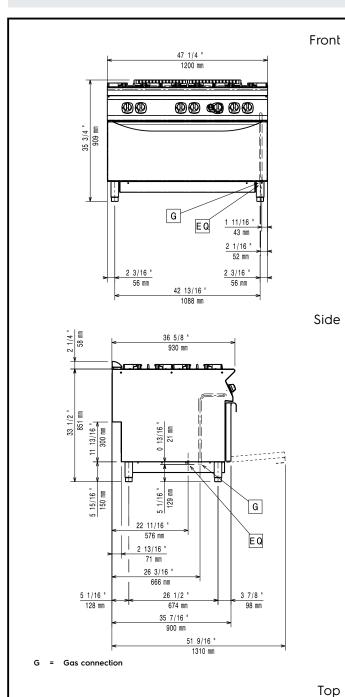



CE

Natural gas - Pressure: 391015 (E9GCGL6CL0) Gas Power: Standard gas delivery: Gas Type Option: Gas Inlet:	7" w.c. (17.4 mbar) 56 kW Natural Gas G20 (20mbar) LPG;Natural Gas 1/2"
Key Information:	
Oven working Temperature:	120 °C MIN; 280 °C MAX
Oven Cavity Dimensions (width):	1000 mm
Oven Cavity Dimensions (height):	380 mm
Oven Cavity Dimensions (depth):	700 mm
Net weight:	200 kg
Shipping weight:	221 kg
Shipping height:	1070 mm
Shipping width:	1020 mm
Shipping depth:	1300 mm
Shipping volume:	1.42 m³
Front Burners Power:	6 - 6 kW
Back Burners Power:	10 - 10 kW
Middle Burners Power:	6 - 0/6 - 0 kW
Certification group:	N9CG
Back Burners Dimension - mm	Ø 100 Ø 100
Front Burners Dimension - mm	Ø60 Ø60
Middle Burners Dimension -	
mm	Ø60 Ø60
If appliance is set up or next to	or against temperature

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

> Modular Cooking Range Line 900XP 6-Burner Gas Range on Large Gas Oven

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.